

# Outdoor Ball Bearing Condenser Fan Motors

## Features:

Important: Use amps as well as HP for replacement reference.

- Auto Protector
- Base Mounted
- Conduit Box
- Reversible
- Ball Bearing
- Capac. Mounted (1Ø)
- Open Lead End Only
- 60 HZ
- 60° Ambient



## SINGLE PHASE - PSC


HP	RPM	Volts	Max. Amps @ 230V	Frame	Stock No.	Shaft	Base	Dim. Ref.	Conn. Dia.	Notes
1/2	1075	208-230/460	5.2	48Z	<b>FB1056</b>	1/2" Flat	Resilient	1	42	1,2
3/4	1075	208-230/460	6.0	56Y	<b>FB1076</b>	5/8" Key & Flat	Resilient	2	42	3
3/4	1075	208-230/460	6.0	56Y	<b>FR1076</b>	5/8" Key & Flat	Rigid	3	42	3
1	1075	208-230/460	9.0	56Y	<b>FB1106</b>	5/8" Key & Flat	Resilient	4	42	4
1	1075	208-230/460	9.0	56Y	<b>FR1106</b>	5/8" Key & Flat	Rigid	5	42	4

## THREE-PHASE

HP	RPM	Volts	F.L.A. @ 230V	Frame	Stock No.	Shaft	Base	Dim. Ref.	Conn. Dia.	Notes
1/2	1140	208-230/460	2.5	56Y	<b>FB3056</b>	1/2" Flat	Resilient	6	28	

### Notes:

1. FB1056 is the same as FB1056X
2. FB1056 also replaces Dunham Bush motor MTR-226.
3. FB1076/FR1076 also replaces Kramer Trenton 045-004 and Universal HF3W0R8K, HF3W052N.
4. FB1106 and FR1106 also replaces motor used on Kramer Trenton units DD661, DD791. (Recommend FR1106 for vertical applications.)

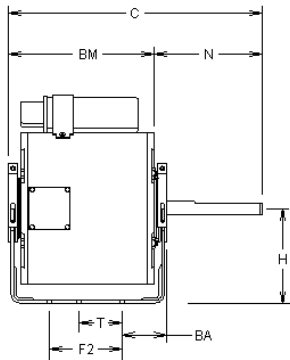

## Approximate Dimensions

Ref.	BM	C	N	H	BA	F2	T
1	8-1/4	13-1/4	5	3	2-1/2	2-3/4	
2	7-1/4	12-1/4	5	3-1/2	1-1/2	2-3/4	1-11/16
3	6-13/16	11-3/4	5	3-1/2	2-3/4	3	
4	8	12-1/2	4-1/2	3-1/2	1-1/2	2-3/4	1-11/16
5	7-9/16	12-1/2	5	3-1/2	2-3/4	3	
6	7-5/16	13	5-11/13	3-1/2	2-1/2	3	