
Space Heating		CERTIFIED®		Dimensions and Connections					Chinning		
Model	Input ¹ (MBH)		DOE Heating	AHRI Net	AFUE	Depth	Width	Height	Space Heating Water	Gas	Shipping Weight (lbs)
	Min	Max	Capacity (MBH)	Rating ² (MBH)	AIUL	(in)	(in)	(in)	sweat,	NPT	(105)
PHTM2120H	13.6	120	112	97	95.0	16.3	17.8	29.8	1	1/2	112
PHTM2150H	20	150	141	123	95.0	20.4	17.8	29.8	1	1/2	132
PHTM2180H	20	180	169	147	95.0	20.4	17.8	29.8	1	1/2	132

¹ Input for elevations up to 2,000 ft. with min vent length. See Table 3-3 for vent diameter connection sizes and derate at max vent length.

120 VAC

Knockouts Gas

Condensate Trap Cleanout

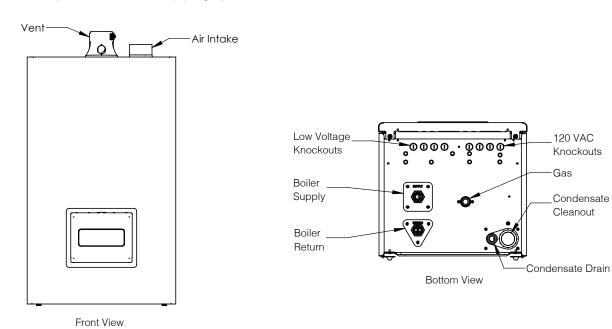

²Net AHRI Water Ratings shown are based on a piping and pickup allowance of 1.15. The manufacturer should be consulted before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent operation, extensive piping systems, etc.