

BLACMAX® GEAR & PULLEY REMOVERS

BTLGP4




BTLGP7



Description	3" to 4" (76 to 102mm)	3" to 7" (76 to 178mm)
Jaw Reach	3.75"(95mm)	5.5"(140mm)
Jaw Spread	11.5"(292mm)	17"(432mm)
Max. Force	24,000 Lbs(106,500 N)	42,000 Lbs(186,500 N)
Removable and Reversible Jaws	2 or 3 (Quick Change, Spring Loaded)	2 or 3 (Quick Change, Spring Loaded)

Reconfigures in seconds to suit your needs

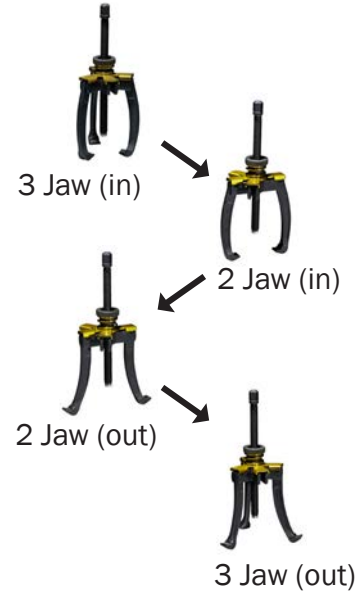

TLRM REAMING AND DEBURRING TOOL

- For 3/16" to 1-1/2" (5mm ~ 38mm) for copper, aluminum and brass tube
- Removes burrs from inside and outside edges of tube
- Rugged 3 blade die cast metal for long life
- Ergonomic shape for clockwise or counterclockwise use



TLDB2 POCKET DEBURRING TOOL

- Remove burrs and surface defects from inner/outer straight and hole edges

REPLACEMENT PARTS

TLDB2X Replacement Blade



TLDB POCKET DEBURRING TOOL

- For soft copper and aluminum tubing
- Remove burrs and surface defects from inner/outer straight and hole edges

REPLACEMENT PARTS

TLDBX Reamer Blade & Screw



FTXSG R410A FLARE SIZE GAUGE

- 1/4", 6.4 mm
- 3/8", 9.5 mm
- 1/2", 12.7 mm
- 5/8", 15.9 mm
- 3/4", 19.1 mm



TCAP CAPILLARY TUBE CUTTER

- Cleanly cuts all types of refrigerant capillary tubing without constricting, swaging or flattening