

V-Belt Drive Advantages

V-belt drives provide many maintenance advantages that help in your daily struggle to reduce equipment repairs and to hold forced downtime to the lowest possible level.

1. They are rugged—they will give years of trouble-free performance when given just reasonable attention...even under adverse conditions.
2. They are clean—require no lubrication.
3. They are efficient—performing with an average of 94-98% efficiency.
4. They are smooth starting and running.
5. They cover extremely wide horsepower ranges.
6. They permit a wide range of driven speeds, using standard electric motors.
7. They dampen vibration between driving and driven machines.
8. They are quiet.
9. They act as a “safety fuse” in the power drive because they refuse to transmit a severe overload of power, except for a very brief time.
10. V-belts and sheaves **wear gradually**—making preventive corrective maintenance simple and easy.

Offers the largest selection of V-Belts in the universe!


Browning is universally known for V-belt drives. In fact, nowhere else can you find such a complete range of V-beltting — and the sheaves to run them — all in stock. Choose the type that's best for your application — Classical, "358" and FHP.

- Matched Belts -

And there's no problem with matched belt sizes either. Browning offers the "**CODE 1**" **one-match** belt system on all classical and "358" belts, allowing easy selection with just one match number for each belt size. The **CODE 1** symbol on any Browning belt provides matching tolerances tighter than ANSI (American National Standards Inc.). Machine matching of belts is also available for precision match requirements.

Wherever you are in the universe — make Browning your first choice in V-belts.

Note: Belt matching is available upon request. The product will ship from our National Distribution Center.

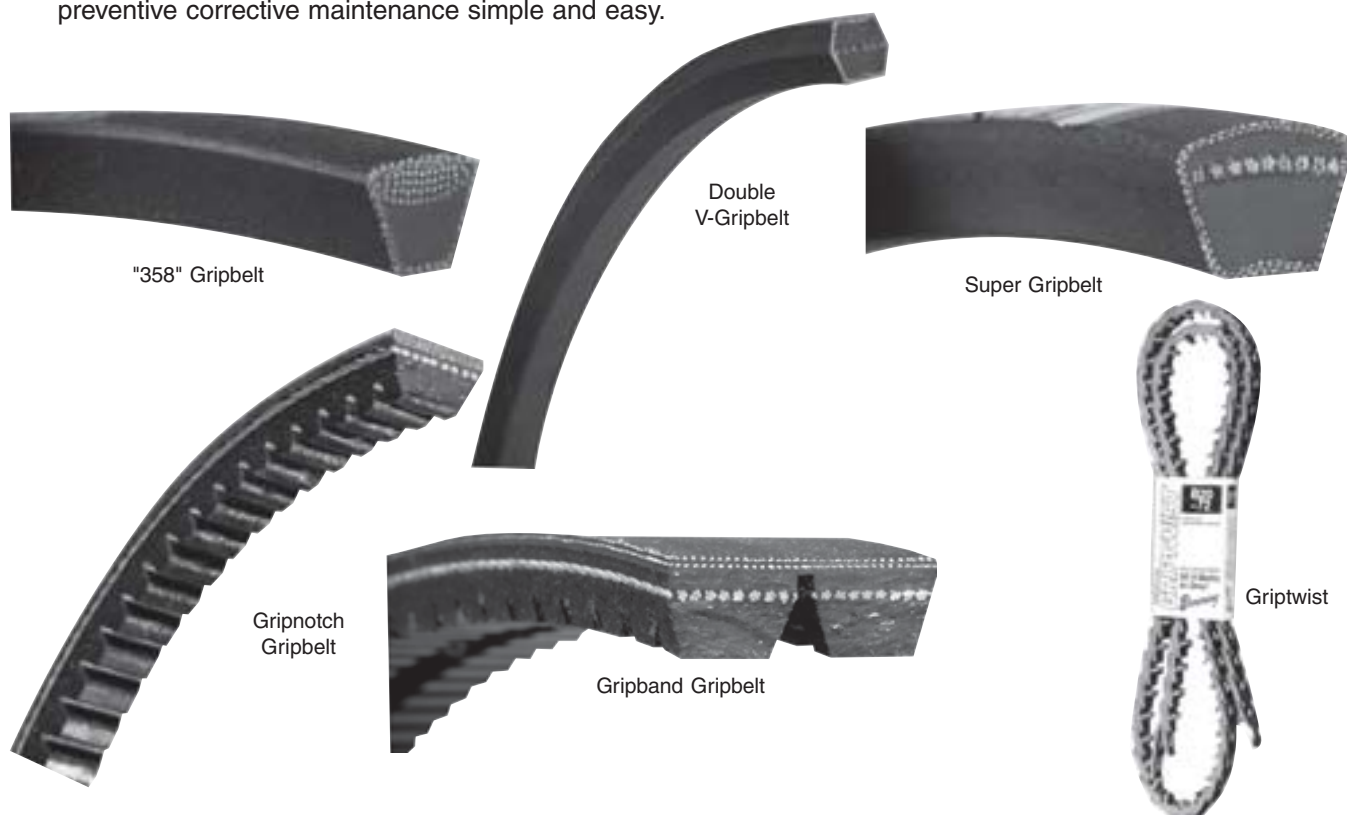

A20 - D660

Super Gripbelts



"A" Belts
1/2" x 5/16"



"B" Belts
21/32" x 7/16"



"C" Belts
7/8" x 17/32"



"D" Belts
1 1/4" x 3/4"

Table No. 1

Super Gripbelts are static conducting.

Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.
	Outside	Pitch			Outside	Pitch			Outside	Pitch			Outside	Pitch	
A20	22.2"	21.3"	.2	A90	92.2"	91.3"	.6	B71	74.0"	72.8"	.8	C68	72.2"	70.9"	1.3
A21	23.2	22.3	.2	A91	93.2	92.3	.6	B72	75.0	73.8	.8	C72	76.2	74.9	1.4
A22	24.2	23.3	.2	A92	94.2	93.3	.6	B73	76.0	74.8	.8	C75	79.2	77.9	1.4
A23	25.2	24.3	.2	A93	95.2	94.3	.6	B74	77.0	75.8	.8	C78	82.2	80.9	1.5
A24	26.2	25.3	.2	A94	96.2	95.3	.6	B75	78.0	76.8	.8	C81	85.2	83.9	1.6
A25	27.2	26.3	.2	A95	97.2	96.3	.6	B76	79.0	77.8	.8	C85	89.2	87.9	1.6
A26	28.2	27.3	.2	A96	98.2	97.3	.7	B77	80.0	78.8	.8	C90	94.2	92.9	1.7
A27	29.2	28.3	.2	A97	99.2	98.3	.7	B78	81.0	79.8	.8	C96	100.2	98.9	1.8
A28	30.2	29.3	.2	A98	100.2	99.3	.7	B79	82.0	80.8	.8	C97	101.2	99.9	1.8
A29	31.2	30.3	.2	A100	102.2	101.3	.7	B80	83.0	81.8	.9	C99	103.2	101.9	1.9
A30	32.2	31.3	.2	A103	105.2	104.3	.7	B81	84.0	82.8	.9	C100	104.2	102.9	1.9
A31	33.2	32.3	.2	A105	107.2	106.3	.7	B82	85.0	83.8	.9	C101	105.2	103.9	1.9
A32	34.2	33.3	.2	A110	112.2	111.3	.8	B83	86.0	84.8	.9	C105	109.2	107.9	2.0
A33	35.2	34.3	.2	A112	114.2	113.3	.8	B84	87.0	85.8	.9	C108	112.2	110.9	2.0
A34	36.2	35.3	.2	A120	122.2	121.3	.8	B85	88.0	86.8	.9	C109	113.2	111.9	2.0
A35	37.2	36.3	.2	A125	127.2	126.3	.9	B86	89.0	87.8	1.0	C111	115.2	113.9	2.1
A36	38.2	37.3	.3	A128	130.2	129.3	.9	B87	90.0	88.8	1.0	C112	116.2	114.9	2.1
A37	39.2	38.3	.3	A136	138.2	137.3	.9	B88	91.0	89.8	1.0	C115	119.2	117.9	2.1
A38	40.2	39.3	.3	A144	146.2	145.3	1.0	B89	92.0	90.8	1.0	C120	124.2	122.9	2.3
A39	41.2	40.3	.3	A158	160.2	159.3	1.1	B90	93.0	91.8	1.0	C124	128.2	126.9	2.4
A40	42.2	41.3	.3	A173	175.2	174.3	1.2	B91	94.0	92.8	1.0	C128	132.2	130.9	2.4
A41	43.2	42.3	.3	A180	182.2	181.3	1.2	B92	95.0	93.8	1.0	C136	140.2	138.9	2.6
A42	44.2	43.3	.3	B22	25.0	23.8	.3	B93	96.0	94.8	1.0	C144	148.2	146.9	2.8
A43	45.2	44.3	.3	B23	26.0	24.8	.3	B94	97.0	95.8	1.0	C148	152.2	150.9	2.8
A44	46.2	45.3	.3	B24	27.0	25.8	.3	B95	98.0	96.8	1.0	C150	154.2	152.9	2.9
A45	47.2	46.3	.3	B25	28.0	26.8	.3	B96	99.0	97.8	1.1	C158	162.2	160.9	3.0
A46	48.2	47.3	.3	B26	29.0	27.8	.3	B97	100.0	98.8	1.1	C162	166.2	164.9	3.1
A47	49.2	48.3	.3	B28	31.0	29.8	.3	B98	101.0	99.8	1.1	C173	177.2	175.9	3.3
A48	50.2	49.3	.3	B29	32.0	30.8	.3	B99	102.0	100.8	1.1	C180	184.2	182.9	3.4
A49	51.2	50.3	.4	B30	33.0	31.8	.3	B100	103.0	101.8	1.1	C195	199.2	197.9	3.7
A50	52.2	51.3	.4	B31	34.0	32.8	.3	B101	104.0	102.8	1.1	C210	214.2	212.9	4.0
A51	53.2	52.3	.4	B32	35.0	33.8	.3	B103	106.0	104.8	1.1	C225	227.2	225.9	4.3
A52	54.2	53.3	.4	B33	36.0	34.8	.4	B105	108.0	106.8	1.1	C240	242.2	240.9	4.6
A53	55.2	54.3	.4	B34	37.0	35.8	.4	B106	109.0	107.8	1.1	C255	257.2	255.9	4.9
A54	56.2	55.3	.4	B35	38.0	36.8	.4	B108	111.0	109.8	1.2	C270	272.2	270.9	5.2
A55	57.2	56.3	.4	B36	39.0	37.8	.4	B111	114.0	112.8	1.2	C285	287.2	285.9	5.4
A56	58.2	57.3	.4	B37	40.0	38.8	.4	B112	115.0	113.8	1.2	C300	302.2	300.9	5.7
A57	59.2	58.3	.4	B38	41.0	39.8	.4	B116	119.0	117.8	1.3	C315	317.2	315.9	6.0
A58	60.2	59.3	.4	B39	42.0	40.8	.4	B120	123.0	121.8	1.3	C330	332.2	330.9	6.3
A59	61.2	60.3	.4	B40	43.0	41.8	.5	B123	126.0	124.8	1.3	C345	347.2	345.9	6.6
A60	62.2	61.3	.4	B41	44.0	42.8	.5	B124	127.0	125.8	1.3	C360	362.2	360.9	6.9
A61	63.2	62.3	.4	B42	45.0	43.8	.5	B126	129.0	127.8	1.4	C390	392.2	390.9	7.5
A62	64.2	63.3	.4	B43	46.0	44.8	.5	B128	131.0	129.8	1.4	C420	422.2	420.9	8.0
A63	65.2	64.3	.4	B44	47.0	45.8	.5	B133	136.0	134.8	1.5	D120	125.2	123.3	4.0
A64	66.2	65.3	.4	B45	48.0	46.8	.5	B136	139.0	137.8	1.5	D128	133.2	131.3	4.4
A65	67.2	66.3	.5	B46	49.0	47.8	.5	B140	143.0	141.8	1.6	D144	149.2	147.3	5.0
A66	68.2	67.3	.5	B47	50.0	48.8	.5	B144	147.0	145.8	1.6	D158	163.2	161.3	5.3
A67	69.2	68.3	.5	B48	51.0	49.8	.5	B148	151.0	149.8	1.6	D162	167.2	165.3	5.5
A68	70.2	69.3	.5	B49	52.0	50.8	.6	B150	153.0	151.8	1.6	D173	178.2	176.3	5.8
A69	71.2	70.3	.5	B50	53.0	51.8	.6	B154	157.0	155.8	1.7	D180	185.2	183.3	6.0
A70	72.2	71.3	.5	B51	54.0	52.8	.6	B158	161.0	159.8	1.7	D195	200.2	198.3	6.3
A71	73.2	72.3	.5	B52	55.0	53.8	.6	B162	165.0	163.8	1.7	D210	215.2	213.3	6.8
A72	74.2	73.3	.5	B53	56.0	54.8	.6	B173	176.0	174.8	1.9	D225	227.2	225.8	7.1
A73	75.2	74.3	.5	B54	57.0	55.8	.6	B180	183.0	181.8	1.9	D240	242.2	240.8	7.7
A74	76.2	75.3	.5	B55	58.0	56.8	.6	B190	193.0	191.8	2.0	D255	257.2	255.8	8.1
A75	77.2	76.3	.5	B56	59.0	57.8	.6	B191	194.0	192.2	2.0	D270	272.2	270.8	8.9
A76	78.2	77.3	.5	B57	60.0	58.8	.7	B195	198.0	196.8	2.0	D285	287.2	285.8	9.8
A77	79.2	78.3	.5	B58	61.0	59.8	.7	B205	208.0	206.9	2.2	D300	302.7	300.8	10.5
A78	80.2	79.3	.5	B59	62.0	60.8	.7	B210	213.0	211.8	2.3	D315	317.7	315.8	10.8
A79	81.2	80.3	.5	B60	63.0	61.8	.7	B225	226.5	225.3	2.5	D330	332.7	330.8	10.6
A80	82.2	81.3	.5	B61	64.0	62.8	.7	B240	241.5	240.3	2.6	D345	347.7	345.8	11.7
A81	83.2	82.3	.5	B62	65.0	63.8	.7	B255	256.5	255.3	2.8	D360	362.7	360.8	11.5
A82	84.2	83.3	.6	B63	66.0	64.8	.7	B270	271.5	270.3	2.9	D390	392.7	390.8	12.4
A83	85.2	84.3	.6	B64	67.0	65.8	.7	B285	286.5	285.3	3.1	D420	422.7	420.8	13.4
A84	86.2	85.3	.6	B65	68.0	66.8	.7	B300	301.5	300.3	3.2	D450	452.7	450.8	16.3
A85	87.2	86.3	.6	B66	69.0	67.8	.7	B315	316.5	315.3	3.4	D480	482.7	480.8	15.8
A86	88.2	87.3	.6	B67	70.0	68.8	.7	B360	361.5	360.3	4.0	D540	542.7	540.8	19.9
A87	89.2	88.3	.6	B68	71.0	69.8	.7	C51	55.2	53.9	1.0	D600	602.7	600.8	21.6
A88	90.2	89.3	.6	B69	72.0	70.8	.8	C55	59.2	57.9	1.1	D660	662.7	660.8	28.8
A89	91.2	90.3	.6	B70	73.0	71.8	.8	C60	64.2	62.9	1.2				

Gripnotch Belts



- Precision molded raw edge construction
- More horsepower in less space
- Notches are molded extra deep
- Oil and heat resistant
- Static conducting

Table No. 1

Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.
	Outside	Pitch			Outside	Pitch			Outside	Pitch			Outside	Pitch	
AX20	22.2"	21.3"	.2	AX80	82.2"	81.3"	.5	BX56	59.0"	57.8"	.6	BX144	147.0"	145.8"	1.7
AX21	23.2	22.3	.2	AX81	83.2	82.3	.5	BX57	60.0	58.8	.6	BX148	151.0	149.8	1.7
AX22	24.2	23.3	.2	AX82	84.2	83.3	.5	BX58	61.0	59.8	.6	BX150	153.0	151.8	1.8
AX23	25.2	24.3	.2	AX83	85.2	84.3	.5	BX59	62.0	60.8	.7	BX154	157.0	155.8	1.8
AX24	26.2	25.3	.2	AX84	86.2	85.3	.5	BX60	63.0	61.8	.7	BX158	161.0	159.8	1.8
AX25	27.2	26.3	.2	AX85	87.2	86.3	.6	BX61	64.0	62.8	.7	BX162	165.0	163.8	1.9
AX26	28.2	27.3	.2	AX86	88.2	87.3	.6	BX62	65.0	63.8	.7	BX173	176.0	174.8	2.0
AX27	29.2	28.3	.2	AX87	89.2	88.3	.6	BX63	66.0	64.8	.7	BX180	183.0	181.8	2.1
AX28	30.2	29.3	.2	AX88	90.2	89.3	.6	BX64	67.0	65.8	.7	BX191	194.0	192.8	2.2
AX29	31.2	30.3	.2	AX89	91.2	90.3	.6	BX65	68.0	66.8	.8	BX195	198.0	196.8	2.3
AX30	32.2	31.3	.2	AX90	92.2	91.3	.6	BX66	69.0	67.8	.8	BX210	213.0	211.8	2.5
AX31	33.2	32.3	.2	AX91	93.2	92.3	.6	BX67	70.0	68.8	.8	BX225	228.0	226.8	2.7
AX32	34.2	33.3	.2	AX92	94.2	93.3	.6	BX68	71.0	69.8	.8	BX240	241.5	240.3	2.8
AX33	35.2	34.3	.2	AX93	95.2	94.3	.6	BX69	72.0	70.8	.8	BX255	256.5	255.3	3.0
AX34	36.2	35.3	.2	AX94	96.2	95.3	.6	BX70	73.0	71.8	.8	BX270	271.5	270.3	3.2
AX35	37.2	36.3	.2	AX95	97.2	96.3	.6	BX71	74.0	72.8	.8	BX300	301.5	300.3	3.6
AX36	38.2	37.3	.3	AX96	98.2	97.3	.7	BX72	75.0	73.8	.8	CX51	55.2	53.9	1.0
AX37	39.2	38.3	.3	AX97	99.2	98.3	.7	BX73	76.0	74.8	.8	CX55	59.2	57.9	1.1
AX38	40.2	39.3	.3	AX98	100.2	99.3	.7	BX74	77.0	75.8	.8	CX60	64.2	62.9	1.2
AX39	41.2	40.3	.3	AX99	101.2	100.3	.7	BX75	78.0	76.8	.9	CX68	72.2	70.9	1.4
AX40	42.2	41.3	.3	AX100	102.2	101.3	.7	BX76	78.0	77.8	.9	CX72	76.2	74.9	1.4
AX41	43.2	42.3	.3	AX105	107.2	106.3	.7	BX77	80.0	78.8	.9	CX75	79.2	77.9	1.5
AX42	44.2	43.3	.3	AX110	112.2	111.3	.8	BX78	81.0	79.8	.9	CX78	82.2	80.9	1.6
AX43	45.2	44.3	.3	AX112	114.2	113.3	.8	BX79	82.0	80.8	.9	CX81	85.2	83.9	1.6
AX44	46.2	45.3	.3	AX120	122.2	121.3	.8	BX80	83.0	81.8	.9	CX85	89.2	87.9	1.7
AX45	47.2	46.3	.3	AX128	130.2	129.3	.9	BX81	84.0	82.8	.9	CX90	94.2	92.9	1.8
AX46	48.2	47.3	.3	AX136	138.2	137.3	.9	BX82	85.0	83.8	.9	CX96	100.2	98.9	1.9
AX47	49.2	48.3	.3	AX144	146.2	145.3	1.0	BX83	86.0	84.8	1.0	CX100	104.2	102.2	2.0
AX48	50.2	49.3	.3	AX158	160.2	159.3	1.0	BX84	87.0	85.8	1.0	CX101	105.2	103.9	2.0
AX49	51.2	50.3	.4	AX173	175.2	174.3	1.1	BX85	88.0	86.8	1.0	CX105	109.2	107.9	2.0
AX50	52.2	51.3	.4	AX180	182.2	181.3	1.2	BX86	89.0	87.8	1.0	CX109	113.2	111.9	2.1
AX51	53.2	52.3	.4	BX27	30.0	28.8	.4	BX87	90.0	88.8	1.0	CX111	115.2	113.9	2.2
AX52	54.2	53.3	.4	BX28	31.0	29.8	.4	BX88	91.0	89.8	1.0	CX112	116.2	114.9	2.2
AX53	55.2	54.3	.4	BX29	32.0	30.8	.4	BX89	92.0	90.8	1.0	CX115	119.2	117.9	2.3
AX54	56.2	55.3	.4	BX30	33.0	31.8	.4	BX90	93.0	91.8	1.1	CX120	124.2	122.9	2.4
AX55	57.2	56.3	.4	BX31	34.0	32.8	.4	BX91	94.0	92.8	1.1	CX128	132.2	130.9	2.6
AX56	58.2	57.3	.4	BX32	35.0	33.8	.4	BX92	95.0	93.8	1.1	CX136	140.2	138.9	2.7
AX57	59.2	58.3	.4	BX33	36.0	34.8	.4	BX94	97.0	95.8	1.1	CX144	148.2	146.9	2.9
AX58	60.2	59.3	.4	BX34	37.0	35.8	.4	BX95	98.0	96.8	1.1	CX150	154.2	152.9	3.0
AX59	61.2	60.3	.4	BX35	38.0	36.8	.4	BX96	99.0	97.8	1.1	CX158	162.2	160.9	3.0
AX60	62.2	61.3	.4	BX36	39.0	37.8	.4	BX97	100.0	98.8	1.1	CX162	166.2	164.9	3.1
AX61	63.2	62.3	.4	BX37	40.0	38.8	.4	BX98	101.0	99.8	1.1	CX173	177.2	175.9	3.1
AX62	64.2	63.3	.4	BX38	41.0	39.8	.4	BX99	102.0	100.8	1.2	CX180	184.2	182.9	3.2
AX63	65.2	64.3	.4	BX39	42.0	40.8	.5	BX100	103.0	101.8	1.2	CX195	199.2	197.9	3.5
AX64	66.2	65.3	.4	BX40	43.0	41.8	.5	BX103	106.0	104.8	1.2	CX210	214.2	212.9	4.0
AX65	67.2	66.3	.4	BX41	44.0	42.8	.5	BX105	108.0	106.8	1.2	CX225	229.2	227.9	4.2
AX66	68.2	67.3	.5	BX42	45.0	43.8	.5	BX106	109.0	107.8	1.2	CX240	242.2	240.9	4.3
AX67	69.2	68.3	.5	BX43	46.0	44.8	.5	BX108	111.0	109.8	1.3	CX255	259.2	257.9	4.6
AX68	70.2	69.3	.5	BX44	47.0	45.8	.5	BX112	115.0	113.8	1.3	CX270	272.2	270.9	5.0
AX69	71.2	70.3	.5	BX45	48.0	46.8	.5	BX113	116.0	114.8	1.3	CX300	304.2	302.9	5.4
AX70	72.2	71.3	.5	BX46	49.0	47.8	.5	BX115	118.0	116.8	1.4	CX330	334.2	332.9	5.9
AX71	73.2	72.3	.5	BX47	50.0	48.8	.5	BX116	119.0	117.8	1.4	CX360	364.2	362.9	6.3
AX72	74.2	73.3	.5	BX48	51.0	49.8	.6	BX120	123.0	121.8	1.4	DX120	125.2	123.3	4.3
AX73	75.2	74.3	.5	BX49	52.0	50.8	.6	BX123	126.0	124.8	1.4	DX128	133.2	131.2	4.4
AX74	76.2	75.3	.5	BX50	53.0	51.8	.6	BX124	127.0	125.8	1.4	DX158	163.2	161.3	5.4
AX75	77.2	76.3	.5	BX51	54.0	52.8	.6	BX126	129.0	127.8	1.4	DX162	167.2	165.3	5.6
AX76	78.2	77.3	.5	BX52	55.0	53.8	.6	BX128	131.0	129.8	1.5	DX180	185.2	183.2	6.2
AX77	79.2	78.3	.5	BX53	56.0	54.8	.6	BX133	136.0	134.8	1.5	DX360	362.7	360.8	12.3
AX78	80.2	79.3	.5	BX54	57.0	55.8	.6	BX136	139.0	137.8	1.6				
AX79	81.2	80.3	.5	BX55	58.0	56.8	.6	BX140	143.0	141.8	1.6				

3GBBX51 - 4GBC300

Gripband Belts

- Oil and heat resistant
- Ideal for pulsating loads and long centers
- Static conducting



Table No. 1

Stock Sizes

Part No.	Pitch Length	Wt. Lbs.	Part No.	Pitch Length	Wt. Lbs.	Part No.	Pitch Length	Wt. Lbs.	Part No.	Pitch Length	Wt. Lbs.	Part No.	Pitch Length	Wt. Lbs.
3GBBX51	52.8"	1.8	4GBBX75	76.8"	4.6	4GBBX105	106.8"	6.4	2GBB195	196.8"	5.8	4GBC120	122.9"	12.4
3GBBX53	54.8	1.8	3GBBX77	78.8	3.5	2GBBX108	109.8	3.3	3GBB195	196.8	8.7	2GBC128	130.9	6.8
2GBBX55	56.8	1.8	2GBBX78	79.8	2.4	3GBBX108	109.8	5.0	4GBB195	196.8	11.6	3GBC128	130.9	9.6
3GBBX55	56.8	2.7	3GBBX78	79.8	3.6	4GBBX108	109.8	6.6	2GBB210	211.8	6.2	4GBC128	130.9	12.8
2GBBX56	57.8	1.8	4GBBX78	79.8	4.8	2GBBX112	113.8	3.4	3GBB210	211.8	9.3	2GBC144	146.9	7.6
3GBBX56	57.8	2.7	3GBBX79	80.8	3.6	3GBBX112	113.8	5.1	4GBB210	211.8	12.4	3GBC144	146.9	11.4
4GBBX56	57.8	3.6	2GBBX80	81.8	2.4	4GBBX112	113.8	6.8	2GBB240	240.3	7.0	4GBC144	146.9	15.2
5GBBX56	57.8	4.5	3GBBX80	81.8	3.6	4GBBX128	129.8	7.8	3GBB240	240.3	10.5	2GBC158	160.9	8.2
3GBBX58	59.8	2.9	4GBBX80	81.8	4.8	2GBBX133	134.8	3.9	4GBB240	240.3	14.0	3GBC158	160.9	12.3
2GBBX60	61.8	1.8	2GBBX81	82.8	2.5	3GBBX133	134.8	8.1	2GBCX75	77.9	4.0	4GBC158	160.9	16.4
3GBBX60	61.8	2.7	3GBBX81	82.8	3.8	2GBBX140	141.8	4.1	3GBCX75	77.9	6.0	2GBC162	164.9	8.4
4GBBX60	61.8	3.6	4GBBX81	82.8	5.0	6GBBX144	145.8	13.2	4GBCX75	77.9	8.0	3GBC162	164.9	12.6
2GBBX62	63.8	1.8	3GBBX82	83.8	3.8	5GBBX210	211.8	15.5	2GBCX81	83.9	4.2	4GBC162	164.9	16.8
3GBBX62	63.8	2.7	2GBBX83	84.8	2.6	2GBB120	121.8	3.6	3GBCX81	83.9	6.3	2GBC173	175.9	9.0
4GBBX62	63.8	3.6	3GBBX83	84.8	3.9	3GBB120	121.8	5.4	4GBCX81	83.9	8.4	3GBC173	175.9	13.5
2GBBX63	64.8	2.0	4GBBX83	84.8	5.2	4GBB120	121.8	7.2	2GBCX85	87.9	4.4	4GBC173	175.9	18.0
3GBBX63	64.8	3.0	2GBBX85	86.8	2.7	2GBB124	125.8	3.8	3GBCX85	87.9	6.6	2GBC180	182.9	9.4
4GBBX63	64.8	4.0	3GBBX85	86.8	4.1	3GBB124	125.8	5.7	4GBCX85	87.9	8.8	3GBC180	182.9	14.1
2GBBX64	65.8	2.0	4GBBX85	86.8	5.4	4GBB124	125.8	7.6	2GBCX90	92.9	4.8	4GBC180	182.9	18.8
3GBBX64	65.8	3.0	2GBBX90	91.8	2.8	2GBB128	129.8	3.9	3GBCX90	92.9	7.2	2GBC195	197.9	10.2
4GBBX64	65.8	4.0	3GBBX90	91.8	4.2	3GBB128	129.8	5.9	4GBCX90	92.9	9.6	3GBC195	197.9	15.3
2GBBX65	66.8	2.0	4GBBX90	91.8	5.6	4GBB128	129.8	7.8	2GBCX96	98.9	5.0	4GBC195	197.9	20.4
3GBBX65	66.8	3.0	5GBBX90	91.8	7.0	2GBB136	137.8	4.0	3GBCX96	98.9	7.5	2GBC210	212.9	11.0
4GBBX65	66.8	4.0	2GBBX93	94.8	2.8	3GBB136	137.8	6.0	4GBCX96	98.9	10.0	3GBC210	212.9	16.5
2GBBX66	67.8	2.0	3GBBX93	94.8	4.2	4GBB136	137.8	8.0	2GBCX100	102.9	5.2	4GBC210	212.9	22.0
3GBBX66	67.8	3.0	4GBBX93	94.8	5.6	2GBB144	145.8	4.4	3GBCX100	102.9	7.8	2GBC225	225.9	11.8
4GBBX66	67.8	4.0	2GBBX95	96.8	2.9	3GBB144	145.8	6.6	4GBCX100	102.9	10.4	3GBC225	225.9	17.7
2GBBX67	68.8	2.0	3GBBX95	96.8	4.4	4GBB144	145.8	8.8	2GBCX105	107.9	5.6	4GBC225	225.9	23.6
3GBBX67	68.8	3.0	4GBBX95	96.8	5.8	2GBB158	159.8	4.8	3GBCX105	107.9	8.4	2GBC240	240.9	12.6
2GBBX68	69.8	2.1	2GBBX97	98.8	3.0	3GBB158	159.8	7.2	4GBCX105	107.9	11.2	3GBC240	240.9	18.9
3GBBX68	69.8	3.1	3GBBX97	98.8	4.5	4GBB158	159.8	9.6	2GBCX112	114.9	5.8	4GBC240	240.9	25.2
4GBBX68	69.8	4.2	4GBBX97	98.8	6.0	2GBB162	163.8	5.0	3GBCX112	114.9	8.7	2GBC255	255.9	11.8
2GBBX70	71.8	2.2	2GBBX100	101.8	3.0	3GBB162	163.8	7.5	4GBCX112	114.9	11.6	3GBC255	255.9	17.7
3GBBX70	71.8	3.3	3GBBX100	101.8	4.5	4GBB162	163.8	10.0	4GBCX225	225.9	23.6	4GBC255	255.9	23.6
4GBBX70	71.8	4.4	4GBBX100	101.8	6.0	2GBB173	174.8	5.2	4GBCX240	240.9	25.2	2GBC270	270.9	14.0
2GBBX71	72.8	2.2	2GBBX103	104.8	3.1	3GBB173	174.8	7.8	4GBCX255	255.9	26.3	3GBC270	270.9	21.0
3GBBX71	72.8	3.3	3GBBX103	104.8	4.7	4GBB173	174.8	10.4	4GBCX270	270.9	28.0	4GBC270	270.9	28.0
4GBBX71	72.8	4.4	4GBBX103	104.8	6.2	2GBB080	181.8	5.4	4GBCX300	300.9	31.2	2GBC300	300.9	15.6
2GBBX75	76.8	2.3	2GBBX105	106.8	3.2	3GBB180	181.8	8.1	2GBC120	122.9	6.2	3GBC300	300.9	23.4
3GBBX75	76.8	3.5	3GBBX105	106.8	4.8	4GBB180	181.8	10.8	3GBC120	122.9	9.3	4GBC300	300.9	31.2

Gripbands with more ribs are available on special order or combinations of Stock Gripbands may be ordered in matched sets for drives with more grooves; for example, two matched three rib Gripbands may be used on a six groove drive.

Horsepower ratings for "X" Gripbands are the same as appropriate number of Gripnotch Belts; others same as Super Gripbelts.

Part No. 2GBBX56 means - 2 = Two Ribs
 GB = Gripband
 B = Cross Section
 X = Notched Construction
 56 = Length Designation

For complete catalog dimensions see eCatalog at
www.emerson-ept.com

Double V Gripbelts



Table No. 1

Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.
	Outside	Pitch			Outside	Pitch			Outside	Pitch			Outside	Pitch	
AA51	54.5"	53.1"	.5	BB83	87.7"	85.9"	1.2	BB144	148.7"	146.9"	2.2	CC120	126.2"	124.2"	2.9
AA55	58.5	57.1	.5	BB85	89.7	87.9	1.2	BB155	159.7	157.9	2.3	CC128	134.2	132.2	3.1
AA60	63.5	62.1	.6	BB90	94.7	92.9	1.3	BB158	162.7	160.9	2.5	CC136	142.2	140.2	3.3
AA68	71.5	70.1	.6	BB93	97.7	95.9	1.3	BB173	177.7	175.9	2.6	CC144	150.2	148.2	3.5
AA75	78.5	77.1	.7	BB94	98.7	96.9	1.4	BB180	184.7	182.9	2.8	CC158	164.2	162.2	3.9
AA80	83.5	82.1	.8	BB97	101.7	99.9	1.4	BB182	186.7	184.9	2.8	CC162	168.2	166.2	3.9
AA85	88.5	87.1	.8	BB103	107.7	105.9	1.5	BB190	194.7	192.9	2.9	CC173	179.2	177.2	4.2
AA90	93.5	92.1	.9	BB105	109.7	107.9	1.5	BB195	199.7	197.9	2.9	CC180	186.2	184.2	4.4
AA96	99.5	98.1	1.0	BB107	111.7	109.9	1.6	BB210	214.7	212.9	3.1	CC195	201.2	199.2	4.8
AA105	108.5	107.1	1.0	BB108	112.7	109.9	1.6	BB226	229.2	227.4	3.4	CC210	216.2	214.2	5.3
AA112	115.5	114.1	1.1	BB111	115.7	113.9	1.7	BB228	231.2	229.4	3.4	CC240	244.2	242.2	5.6
AA120	123.5	122.1	1.2	BB112	116.7	114.9	1.5	BB240	243.2	241.4	3.6	CC270	274.2	272.2	6.5
AA128	131.5	130.1	1.2	BB116	120.7	118.9	1.8	BB270	273.2	271.4	4.0	CC300	304.2	302.2	7.6
BB45	49.7	47.9	.6	BB117	121.7	119.9	1.8	BB273	276.2	274.4	4.1	CC330	334.2	332.2	7.5
BB54	58.7	56.9	.8	BB118	122.7	120.9	1.8	BB300	303.2	301.4	4.6	CC360	364.2	362.2	8.1
BB55	59.7	57.9	.8	BB120	124.7	122.9	1.8	CC75	81.2	79.2	1.8	▲CC360DC	364.2	362.2	8.1
BB60	64.7	62.9	.9	BB123	127.7	125.9	1.9	CC85	91.2	89.2	1.9	▲CC480DC	484.2	480.9	14.3
BB68	72.7	70.9	.9	BB124	128.7	126.9	1.9	CC90	96.2	94.2	2.0	▲CC540DC	544.2	540.9	17.5
BB74	78.7	76.9	1.0	BB128	132.7	130.9	1.9	CC96	102.2	100.2	2.1	▲CC700DC	704.2	700.9	21.5
BB75	79.7	77.9	1.0	BB129	133.7	131.9	2.0	CC105	111.2	109.2	2.3	▲CC720DC	724.2	720.9	23.0
BB81	85.7	83.9	1.1	BB136	140.7	138.9	2.1	CC112	118.2	116.2	2.6				

▲ Deep-cog construction.

2L120 - 5L1000

FHP Belts

- Wrapped construction provides smooth, quiet operation.
- Formulated for maximum flexibility with smaller diameter sheaves.
- Oil and heat resistant - static conducting.



Table No. 1

Stock Sizes

Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.	Belt No.	Length		Wt. Lbs.
	Outside	Pitch			Outside	Pitch			Outside	Pitch			Outside	Pitch	
2L120	12"	11.6"	.03	3L560	56"	55.3"	.18	4L650	65"	64.0"	.38	5L450	45"	43.8"	.38
2L140	14	13.6	.04	3L570	57	56.3	.18	4L660	66	65.0	.38	5L460	46	44.8	.44
2L150	15	14.6	.04	3L580	58	57.3	.18	4L670	67	66.0	.38	5L470	47	45.8	.44
2L160	16	15.6	.04	3L590	59	58.3	.19	4L680	68	67.0	.38	5L480	48	46.8	.44
2L180	18	17.6	.05	3L600	60	59.3	.19	4L690	69	68.0	.38	5L490	49	47.8	.50
2L200	20	19.6	.06	3L610	61	60.3	.19	4L700	70	69.0	.38	5L500	50	48.8	.50
2L220	22	21.6	.06	3L620	62	61.3	.19	4L710	71	70.0	.38	5L510	51	49.8	.50
2L240	24	23.6	.07	3L630	63	62.3	.20	4L720	72	71.0	.38	5L520	52	50.8	.50
2L285	28 1/2	28.1	.07	4L170	17	16.0	.10	4L730	73	72.0	.38	5L530	53	51.8	.50
2L300	30	29.6	.08	4L180	18	17.0	.10	4L740	74	73.0	.38	5L540	54	52.8	.50
2L310	31	30.6	.08	4L190	19	18.0	.11	4L750	75	74.0	.44	5L550	55	53.8	.50
2L320	32	31.6	.09	4L200	20	19.0	.11	4L760	76	75.0	.44	5L560	56	54.8	.50
2L325	32 1/2	32.1	.09	4L210	21	20.0	.12	4L770	77	76.0	.44	5L570	57	55.8	.50
2L345	34 1/2	34.1	.09	4L220	22	21.0	.12	4L780	78	77.0	.44	5L580	58	56.8	.50
3L120	12	11.3	.04	4L225	22 1/2	21.5	.13	4L790	79	78.0	.44	5L590	59	57.8	.50
3L130	13	12.3	.04	4L230	23	22.0	.13	4L800	80	79.0	.44	5L600	60	58.8	.56
3L140	14	13.3	.05	4L240	24	23.0	.13	4L810	81	80.0	.44	5L610	61	59.8	.56
3L150	15	14.3	.05	4L250	25	24.0	.13	4L820	82	81.0	.44	5L620	62	60.8	.56
3L160	16	15.3	.05	4L260	26	25.0	.13	4L830	83	82.0	.44	5L630	63	61.8	.56
3L170	17	16.3	.05	4L270	27	26.0	.13	4L840	84	83.0	.44	5L640	64	62.8	.63
3L180	18	17.3	.06	4L280	28	27.0	.13	4L850	85	84.0	.50	5L650	65	63.8	.63
3L190	19	18.3	.06	4L290	29	28.0	.13	4L860	86	85.0	.50	5L660	66	64.8	.63
3L200	20	19.3	.06	4L300	30	29.0	.13	4L870	87	86.0	.50	5L670	67	65.8	.63
3L210	21	20.3	.07	4L310	31	30.0	.19	4L880	88	87.0	.50	5L680	68	66.8	.63
3L220	22	21.3	.07	4L320	32	31.0	.19	4L890	89	88.0	.50	5L690	69	67.8	.63
3L230	23	22.3	.07	4L330	33	32.0	.19	4L900	90	89.0	.50	5L700	70	68.8	.69
3L240	24	23.3	.08	4L340	34	33.0	.19	4L910	91	90.0	.50	5L710	71	69.8	.69
3L250	25	24.3	.08	4L350	35	34.0	.19	4L920	92	91.0	.50	5L720	72	70.8	.69
3L260	26	25.3	.08	4L360	36	35.0	.19	4L930	93	92.0	.50	5L730	73	71.8	.69
3L270	27	26.3	.08	4L370	37	36.0	.19	4L940	94	93.0	.50	5L740	74	72.8	.69
3L280	28	27.3	.09	4L380	38	37.0	.19	4L950	95	94.0	.50	5L750	75	73.8	.69
3L290	29	28.3	.09	4L390	39	38.0	.25	4L960	96	95.0	.50	5L760	76	74.8	.69
3L300	30	29.3	.09	4L400	40	39.0	.25	4L970	97	96.0	.50	5L770	77	75.8	.69
3L310	31	30.3	.10	4L410	41	40.0	.25	4L980	98	97.0	.56	5L780	78	76.8	.75
3L320	32	31.3	.10	4L415	41 1/2	40.5	.25	4L990	99	98.0	.56	5L790	79	77.8	.75
3L330	33	32.3	.10	4L420	42	41.0	.25	4L1000	100	99.0	.56	5L800	80	78.8	.75
3L340	34	33.3	.11	4L430	43	42.0	.25	5L230	23	21.8	.19	5L810	81	79.8	.75
3L350	35	34.3	.11	4L440	44	43.0	.25	5L240	24	22.8	.19	5L820	82	80.8	.75
3L360	36	35.3	.11	4L450	45	44.0	.25	5L250	25	23.8	.19	5L830	83	81.8	.75
3L370	37	36.3	.12	4L460	46	45.0	.25	5L260	26	24.8	.19	5L840	84	82.8	.75
3L380	38	37.3	.12	4L470	47	46.0	.25	5L270	27	25.8	.19	5L850	85	83.8	.81
3L390	39	38.3	.12	4L480	48	47.0	.25	5L280	28	26.8	.19	5L860	86	84.8	.81
3L400	40	39.3	.13	4L490	49	48.0	.31	5L290	29	27.8	.19	5L870	87	85.8	.81
3L410	41	40.3	.13	4L500	50	49.0	.31	5L300	30	28.8	.29	5L880	88	86.8	.81
3L420	42	41.3	.13	4L510	51	50.0	.31	5L310	31	29.8	.25	5L890	89	87.8	.81
3L430	43	42.3	.13	4L520	52	51.0	.31	5L320	32	30.8	.25	5L900	90	88.8	.81
3L440	44	43.3	.14	4L530	53	52.0	.31	5L330	33	31.8	.25	5L910	91	89.8	.88
3L450	45	44.3	.14	4L540	54	53.0	.31	5L340	34	32.8	.25	5L920	92	90.8	.88
3L460	46	45.3	.14	4L550	55	54.0	.31	5L350	35	33.8	.31	5L930	93	91.8	.88
3L470	47	46.3	.15	4L560	56	55.0	.31	5L360	36	34.8	.31	5L940	94	92.8	.88
3L480	48	47.3	.15	4L570	57	56.0	.31	5L370	37	35.8	.31	5L950	95	93.8	.88
3L490	49	48.3	.15	4L580	58	57.0	.31	5L380	38	36.8	.31	5L960	96	94.8	.88
3L500	50	49.3	.16	4L590	59	58.0	.31	5L390	39	37.8	.31	5L970	97	95.8	.88
3L510	51	50.3	.16	4L600	60	59.0	.31	5L400	40	38.8	.31	5L980	98	96.8	.94
3L520	52	51.3	.16	4L610	61	60.0	.31	5L410	41	39.8	.38	5L990	99	97.8	.94
3L530	53	52.3	.17	4L620	62	61.0	.31	5L420	42	40.8	.38	5L1000	100	98.8	.94
3L540	54	53.3	.17	4L630	63	62.0	.31	5L430	43	41.8	.38				
3L550	55	54.3	.18	4L640	64	63.0	.38	5L440	44	42.8	.38				

“358” Gripbelts and Gripnotch



- Oil and heat resistant
- More horsepower in less space
- Static conducting



3V
3/8" x 5/16"



5V
5/8" x 17/32"



8V
1" x 29/32"

Table No. 1

Specifications

Part No.	Outside Length	Wt. Lbs.	Part No.	Outside Length	Wt. Lbs.	Part No.	Outside Length	Wt. Lbs.
3VX250	25.0	.1	5VX590	59.0	.6	5V2240	224.0	2.6
3VX265	26.5	.1	5VX600	60.0	.7	5V2360	236.0	2.8
3VX280	28.0	.1	5VX610	61.0	.7	5V2500	250.0	2.9
3VX300	30.0	.1	5VX630	63.0	.7	5V2650	265.0	3.2
3VX315	31.5	.1	5VX650	65.0	.7	5V2800	280.0	3.3
3VX335	33.5	.1	5VX660	66.0	.8	5V3000	300.0	3.6
3VX355	35.5	.2	5VX670	67.0	.8	5V3150	315.0	3.9
3VX375	37.5	.2	5VX680	68.0	.8	5V3350	335.0	4.0
3VX400	40.0	.2	5VX690	69.0	.8	5V3550	355.0	4.3
3VX425	42.5	.2	5VX710	71.0	.8			
3VX450	45.0	.2	5VX730	73.0	.8	8V1000	100.0	3.3
3VX475	47.0	.2	5VX740	74.0	.8	8V1120	112.0	3.6
3VX500	50.0	.2	5VX750	75.0	.8	8V1180	118.0	3.8
3VX530	53.0	.2	5VX780	78.0	.8	8V1250	125.0	3.9
3VX560	56.0	.2	5VX800	80.0	.9	8V1320	132.0	4.3
3VX600	60.0	.3	5VX810	81.0	.9	8V1400	140.0	4.5
3VX630	63.0	.3	5VX830	83.0	.9	8V1500	150.0	4.8
3VX670	67.0	.3	5VX840	84.0	.9	8V1600	160.0	5.1
3VX710	71.0	.3	5VX850	85.0	.9	8V1700	170.0	5.6
3VX750	75.0	.3	5VX860	86.0	.9	8V1800	180.0	6.0
3VX800	80.0	.4	5VX880	88.0	.9	8V1900	190.0	6.3
3VX850	85.0	.4	5VX900	90.0	1.0	8V2000	200.0	6.5
3VX900	90.0	.4	5VX930	93.0	1.0	8V2120	212.0	6.9
3VX950	95.0	.4	5VX950	95.0	1.0	8V2240	224.0	7.2
3VX1000	100.0	.4	5VX960	96.0	1.0	8V2360	236.0	7.6
3VX1060	106.0	.4	5VX1000	100.0	1.1	8V2500	250.0	8.0
3VX1120	112.0	.5	5VX1030	103.0	1.1	8V2650	265.0	8.5
3VX1180	118.0	.5	5VX1060	106.0	1.2	8V2800	280.0	8.9
3VX1250	125.0	.6	5VX1080	108.0	1.2	8V3000	300.0	9.6
3VX1320	132.0	.6	5VX1120	112.0	1.3	8V3150	315.0	10.3
3VX1400	140.0	.6	5VX1150	115.0	1.3	8V3350	335.0	11.4
			5VX1180	118.0	1.4	8V3550	355.0	12.4
5VX450	45.0	.4	5VX1230	123.0	1.4	8V4000	400.0	13.0
5VX470	47.0	.5	5VX1250	125.0	1.4	8V4500	450.0	14.4
5VX490	49.0	.5	5VX1320	132.0	1.5			
5VX500	50.0	.6	5VX1400	140.0	1.6			
5VX510	51.0	.6	5VX1500	150.0	1.8			
5VX530	53.0	.6	5VX1600	160.0	1.8			
5VX540	54.0	.6	5VX1700	170.0	2.0			
5VX550	55.0	.6	5VX1800	180.0	2.1			
5VX560	56.0	.6	5VX1900	190.0	2.3			
5VX570	57.0	.6	5VX2000	200.0	2.4			
5VX580	58.0	.6	5V2120	212.0	2.4			

2GB3VX450 - 4GB5V3000

“358” Gripband Belts

Multiple V-Belts
in Unit
Construction

- Oil and heat resistant
- Ideal for pulsating loads and long centers



Table No. 1

Stock Sizes

Part No.	Outside Length	Wt. Lbs.	Part No.	Outside Length	Wt. Lbs.	Part No.	Outside Length	Wt. Lbs.	Part No.	Outside Length	Wt. Lbs.	Part No.	Outside Length	Wt. Lbs.
2GB3VX450	45.0	.6	3BG3VX800	80.0	1.5	4GB3V1400 ▲	140.0	3.6	4GB5VX1120	112.0	7.2	3BG5V1800	180.0	9.0
3BG3VX450	45.0	.9	4GB3VX800	80.0	2.0	2GB5VX670	67.0	2.2	4GB5VX1180	118.0	7.6	4GB5V1800	180.0	12.0
4GB3VX450	45.0	1.2	2GB3VX850	85.0	1.2	3BG5VX670	67.0	3.3	6GB5VX1230	123.0	10.0	2GB5V1900	190.0	6.4
2GB3VX475	47.5	.6	3BG3VX850	85.0	1.8	4GB5VX670	67.0	4.4	3GB3VX1250	125.0	2.4	3BG5V1900	190.0	9.6
3BG3VX475	47.5	.9	4GB3VX850	85.0	2.4	2GB5VX710	71.0	2.4	3GB5VX1250	125.0	6.0	4GB5V1900	190.0	12.8
4GB3VX475	47.5	1.2	2GB3VX900	90.0	1.2	3BG5VX710	71.0	3.6	5GB5VX1600	160.0	12.5	2GB5V2000	200.0	6.6
2GB3VX500	50.0	.6	3BG3VX900	90.0	1.8	4GB5VX710	71.0	4.8	2GB5V1180	118.0	3.8	3BG5V2000	200.0	9.9
3BG3VX500	50.0	.9	4GB3VX900	90.0	2.4	2GB5VX750	75.0	2.6	3BG5V1180	118.0	5.7	4GB5V2000	200.0	13.2
4GB3VX500	50.0	1.2	2GB3VX950	95.0	1.2	3BG5VX750	75.0	3.9	4GB5V1180	118.0	7.6	2GB5V2120	212.0	7.0
2GB3VX530	53.0	.8	3BG3VX950	95.0	1.8	4GB5VX750	75.0	5.2	2GB5V1250	125.0	4.0	3BG5V2120	212.0	10.5
3BG3VX530	53.0	1.2	4GB3VX950	95.0	2.4	2GB5VX800	80.0	2.6	3BG5V1250	125.0	6.0	4GB5V2120	212.0	14.0
4GB3VX530	53.0	1.6	2GB3VX1000	100.0	1.4	3BG5VX800	80.0	3.9	4GB5V1250	125.0	8.0	2GB5V2240	224.0	7.6
2GB3VX560	56.0	.8	3BG3VX1000	100.0	2.1	4GB5VX800	80.0	5.2	5GB5V1250	125.0	10.0	3BG5V2240	224.0	11.4
3BG3VX560	56.0	1.2	4GB3VX1000	100.0	2.8	4GB5VX850	85.0	5.6	2GB5V1320	132.0	4.0	4GB5V2240	224.0	15.2
4GB3VX560	56.0	1.6	2GB3VX1060	106.0	1.4	2GB5VX900	90.0	3.0	3BG5V1320	132.0	6.0	4GB5V2360	236.0	16.0
2GB3VX600	60.0	.8	3BG3VX1060	106.0	2.1	3BG5VX900	90.0	4.5	4GB5V1320	132.0	8.0	2GB5V2500	250.0	8.4
3BG3VX600	60.0	1.2	4GB3VX1060	106.0	2.8	4GB5VX900	90.0	6.0	2GB5V1400	140.0	4.4	3BG5V2500	250.0	12.6
4GB3VX600	60.0	1.6	2GB3VX1120	112.0	1.4	2GB5VX950	95.0	3.0	3BG5V1400	140.0	6.6	4GB5V2500	250.0	16.8
2GB3VX630	63.0	.8	3BG3VX1120	112.0	2.1	3BG5VX950	95.0	4.5	4GB5V1400	140.0	8.8	2GB5V2650	265.0	8.6
3BG3VX630	63.0	1.2	4GB3VX1120	112.0	2.8	4GB5VX950	95.0	6.0	2GB5V1500	150.0	4.6	3BG5V2650	265.0	12.9
4GB3VX630	63.0	1.6	2GB3V1180 ▲	118.0	1.6	2GB5VX1000	100.0	3.2	3BG5V1500	150.0	6.9	4GB5V2650	265.0	17.2
2GB3VX670	67.0	.8	3BG3V1180 ▲	118.0	2.4	3BG5VX1000	100.0	4.8	4GB5V1500	150.0	9.2	2GB5V2800	280.0	9.0
3BG3VX670	67.0	1.2	4GB3V1180 ▲	118.0	3.2	4GB5VX1000	100.0	6.4	5GB5V1500	150.0	11.5	3BG5V2800	280.0	13.5
4GB3VX670	67.0	1.6	2GB3V1250 ▲	125.0	1.6	2GB5VX1000	106.0	3.4	2GB5V1600	160.0	5.0	4GB5V2800	280.0	18.0
2GB3VX710	71.0	1.0	3BG3V1250 ▲	125.0	2.4	3BG5VX1000	106.0	5.1	3BG5V1600	160.0	7.5	2GB5V3000	300.0	10.0
3BG3VX710	71.0	1.5	4GB3V1250 ▲	125.0	3.2	2GB5VX1060	106.0	3.4	4GB5V1600	160.0	10.0	3BG5V3000	300.0	15.0
4GB3VX710	71.0	2.0	2GB3V1320 ▲	132.0	1.8	3BG5VX1060	106.0	5.1	2GB5V1700	170.0	5.6	4GB5V3000	300.0	20.0
2GB3VX750	75.0	1.0	3BG3V1320 ▲	132.0	2.7	4GB5VX1060	106.0	6.8	3BG5V1700	170.0	8.4			
3BG3VX750	75.0	1.5	4GB3V1320 ▲	132.0	3.6	5GB5VX1060	106.0	8.5	4GB5V1700	170.0	11.2			
4GB3VX750	75.0	2.0	2GB3V1400 ▲	140.0	1.8	2GB5VX1120	112.0	3.6	5GB5V1700	170.0	14.0			
2GB3VX800	80.0	1.0	3BG3V1400 ▲	140.0	2.7	3BG5VX1120	112.0	5.4	2GB5V1800	180.0	6.0			

Gripbands with more ribs are available on special order or combinations of Stock Gripbands may be ordered in matched sets for drives with more grooves; for example, two matched three rib Gripbands may be used on a six groove drive.

Horsepower ratings for “X” Gripbands are the same as appropriate number of Gripnotch Belts; others same as Super Gripbelts except “3V” Gripbands marked (▲) are rated at 80% of “3VX” Gripnotch ratings.

Part No. 2GB3VX450 means - 2 = Two Ribs
GB = Gripband
3V = Cross Section
X = Notched Construction
450 = 45” Outside Length

For complete catalog dimensions see eCatalog at
www.emerson-ept.com

Premium Griptwist Belt

Adjustable to any length... Ideal for center drives, vibration suppression and hostile environments.

- **Higher Capacity**

You don't need to compromise when you install Premium Griptwist, because this belt has remarkable strength and durability. In fact, Premium Griptwist delivers higher horsepower than any other link-type V-belt.

- **Easy Installation**

Premium Griptwist Belts can be assembled to any length required in a matter of seconds, with just a twist of the wrist. No special tools required. No need to dismantle machinery.

- **Perfect for Emergency Replacement**

Premium Griptwist minimizes production downtime because it assembles and installs immediately for any length required. A supply of Premium Griptwist is positive insurance that you'll never be without the exact belt length you need.

- **Vibration Free**

Premium Griptwist Belts have no equal in suppressing troublesome vibration. Because of their extremely close tolerances, they create and transmit up to 90% less vibration than classical endless V-belts.

- **Low Stretch**

Premium Griptwist's twist-lock design locks the belt links tightly to the length desired. Combined with the 100% urethane/polyester construction, this produces a belt with less than half the stretch of other link-type belts.

- **Less Inventory**

Premium Griptwist is available in standard A, B, and C cross sections, replacing both standard and fractional horsepower V-belt inventory.

- **Lower Drive Tensions**

The Premium Griptwist raw-edge cog construction allows lower drive tensions, extending both belt and bearing life.

- **Cooler Running**

The cross-link construction of Premium Griptwist dissipates heat rapidly, virtually eliminating heat build-up and fatigue.

- **Superior Design and Materials**

Premium Griptwist's durability and versatility lies in simplicity of design combined with high-strength urethane elastomer reinforced with multiple plies of polyester fabric. This results in an incredibly strong yet flexible belt, providing consistently high performance.

- **Oil, Water, Chemical and Heat Resistant**

Premium Griptwist's rugged construction withstands temperatures from 0° to 250°F...provides excellent resistance to water, oils and many industrial chemicals.



Available in convenient 10' sleeves

With a single coil of Premium Griptwist belting in each of the commonly used cross sections - A, B, and C - you can replace any of *235 standard endless V-belts*. And you can do it instantly and easily without costly and time-consuming disassembly of machinery.

Or select the unique new "Super Spare" sleeves in A and B cross sections, providing up to a 50-belt instant inventory in one low cost item.

But either way - coil or sleeve - this is industry's newest and most advanced design in link-type belting, offering capacities and features never before available. Put Premium Griptwist in your stockroom today, and turn down-time into drive time, every time.

Table No. 1 Specifications

Premium Griptwist	10 Ft.	Sleeve
3LP Griptwist	X	3L SLEEVE
AP Griptwist	X	AP SLEEVE
BP Griptwist	X	BP SLEEVE