



For more product information, refer to individual product guides at [AprilairePartners.com](http://AprilairePartners.com) or call 800.334.6011.



# HUMIDITY CONTROL

Humidifiers – Part of the Aprilaire Healthy Air System

	Humidifiers	Type of Humidification	Unit Size Width x Height x Depth	Plenum Opening	Capacity GPD = Gallons Per Day	Electrical Data	Water Panel/ Canister
800 SERIES	<p><b>#800<sup>††</sup></b> <b>#801<sup>***</sup></b></p>	<p><b>Steam</b> For applications when evaporative units are less practical (attics, crawl spaces, closets, milder winter climates, non-forced-air heating source).</p>	10 <sup>1</sup> / <sub>8</sub> " x 20 <sup>7</sup> / <sub>8</sub> " x 7 <sup>1</sup> / <sub>8</sub> "	-	11.5 GPD 16.0 GPD 20.5 GPD 30.0 GPD 23.3 GPD 34.6 GPD	120V 60Hz 11.5 AMP 120V 60Hz 16 AMP 208V 60Hz 11.5 AMP 208V 60Hz 16 AMP 240V 60Hz 11.5 AMP 240V 60Hz 16 AMP	80 <sup>††</sup>
	<p><b>#865</b> <b>#866<sup>***</sup></b></p>	<p><b>Ductless Steam</b> Includes the Model 800, Fan Pack, Model 65 Control and Model 4028 Drain Trap. For homes without forced-air heating systems.</p>	<p><b>Fan Pack:</b> 14" x 6<sup>2</sup>/<sub>32</sub>" x 3<sup>1</sup>/<sub>16</sub>"</p> <p><b>Finished Grille:</b> 16<sup>1</sup>/<sub>16</sub>" x 9" x 1<sup>1</sup>/<sub>2</sub>"</p>	-			
700 SERIES	<p><b>#700*</b> <b>#700M<sup>**</sup></b></p>	<p><b>Fan Powered Evaporative</b> Built-in fan that pulls heated air directly from the furnace.</p>	15 <sup>2</sup> / <sub>32</sub> " x 18" x 10 <sup>1</sup> / <sub>32</sub> "	W: 14 <sup>3</sup> / <sub>4</sub> " H: 14 <sup>3</sup> / <sub>16</sub> "	18 GPD	120V 60Hz 0.8 AMP	35
600 SERIES	<p><b>#600*</b> <b>#600M<sup>**</sup></b></p>	<p><b>Large Bypass Evaporative</b> Uses the furnace blower to move air through a Water Panel®.</p>	15 <sup>5</sup> / <sub>8</sub> " x 15 <sup>3</sup> / <sub>4</sub> " x 10 <sup>1</sup> / <sub>4</sub> " 6" dia. round opening	W: 10" H: 12 <sup>3</sup> / <sub>4</sub> "	17 GPD	24V 60Hz 0.5 AMP	35
500 SERIES	<p><b>#500*</b> <b>#500M<sup>**</sup></b></p>	<p><b>Small Bypass Evaporative</b> Designed for smaller homes.</p>	15 <sup>5</sup> / <sub>8</sub> " x 13" x 10 <sup>1</sup> / <sub>4</sub> " 6" dia. round opening	W: 9 <sup>1</sup> / <sub>2</sub> " H: 9 <sup>1</sup> / <sub>2</sub> "	12 GPD	24V 60Hz 0.5 AMP	10
400 SERIES	<p><b>#400*</b> <b>#400M<sup>**</sup></b></p>	<p><b>Water Saver Bypass Evaporative</b> Uses 100% of water and evaporative technology that eliminates the need for a drain. <b>Conserves Water.</b></p>	15 <sup>5</sup> / <sub>8</sub> " x 15 <sup>3</sup> / <sub>4</sub> " x 10 <sup>1</sup> / <sub>4</sub> "* 6" dia. round opening See note on heat pumps <sup>†</sup>	W: 10" H: 12 <sup>3</sup> / <sub>4</sub> "	17 GPD	24V 60Hz 0.5 AMP	45
300 SERIES	<p><b>NEW!</b> <b>#300</b></p>	<p><b>Self-Contained Evaporative</b> For boilers, mini-splits, radiant heat and ductless systems.</p>	14 <sup>3</sup> / <sub>8</sub> " x 12 <sup>1</sup> / <sub>2</sub> " x 22 <sup>3</sup> / <sub>32</sub>	-	13 GPD	120V 60Hz 0.7 AMP	35



HUMIDIFIER SIZING GUIDELINES GPD Needed Per Square Foot** Based on Building Structure Tightness							
Structure Tightness	VOLUME OF BUILDING (FT <sup>3</sup> )						
	8,000	12,000	16,000	20,000	24,000	32,000	40,000
	BUILDING FLOOR AREA (FT <sup>2</sup> ) WITH 8 FT CEILINGS						
	1,000	1,500	2,000	2,500	3,000	4,000	5,000
Tight	3.3 GPD	5.0 GPD	6.7 GPD	8.3 GPD	10.0 GPD	13.4 GPD	16.7 GPD
Average	6.7 GPD	10.0 GPD	13.4 GPD	16.7 GPD	20.0 GPD	26.7 GPD	33.4 GPD
Loose	10.0 GPD	15.0 GPD	20.0 GPD	25.0 GPD	30.1 GPD	40.1 GPD	50.1 GPD

\*Automatic Digital Control (shown)

\*\*Manual Control - For those rare occurrences where an automatic control is not practical, Aprilaire offers the same great humidifiers with a mechanical control.

\*\*\*801 & 866 Modulating Steam Humidifier - For precise RH control. Controls are sold separately.

†Heat Pumps - Model 400 can be installed in heat pump applications. However, due to the fact that heat pumps deliver lower temperature air to the home than gas furnaces, evaporation will be approximately 60% of rated capacity. (With other Aprilaire models, hot water can be used instead of cold to maximize evaporation. However, due to the nature of the wicking water panel in the Model 400, hot water provides less benefit). As such, your dealer will need to take the size and age of your home into consideration to ensure the Model 400 will provide satisfactory comfort and protection through adequate humidification.

††Model 800LC available with 80LC canister for less conductive water 75-300µS/cm and 120VAC applications.

!AHRI Air Conditioning, Heating, and Refrigeration Institute GPD = Gallons Per Day Guideline F

A family of 4 will add 2 gallons of humidity per day through everyday activities like breathing, cooking, bathing and washing. Evaporative capacities assume blower is active 100% of the time, plenum temperature is at 120° F and water is cold.

Bypass Humidifiers - Can be installed on the supply or return plenum.

Water Usage Rate - Model 300 is 6 gph (gph=gallons per hour); Models 500, 600 and 700 are 3 gph; Model 400 is 0.7 gph; Model 800 is 0.6 to 1.8 gph depending on voltage, amp draw and water quality.


Water Usage Rate - Models 350 and 360 are 6 gph (gph=gallons per hour); Models 500, 600 and 700 are 3 gph; Model 400 is 0.7 gph; Model 800 is 0.6 to 1.8 gph depending on voltage, amp draw and water quality.

# Regional Humidifier Applications

Aprilaire humidifiers can be installed on many different types of HVAC equipment and controlled to provide optimal humidity levels. This application guide is to assist in the selection of the appropriate Aprilaire product based upon geography and heating equipment.

The Aprilaire humidifier product portfolio consists of evaporative flow through, fan-powered products and residential steam. It's important to consider the plenum temperature, air flow (fan speed) and run time (heat call primary, fan only call secondary) when selecting products.

Aprilaire's control strategy will maximize the humidifier run time/capacity. The automatic humidity controls have an integrated blower activation relay. This relay is factory set to "ON". It will turn on the humidifier and the HVAC blower for humidification without a heat call. This will dramatically increase the capacity of the humidifier. Installations with a manual humidifier control can increase capacity by turning the thermostat fan to "ON". When installing evaporative humidifiers, it's recommended they are plumbed to hot water.

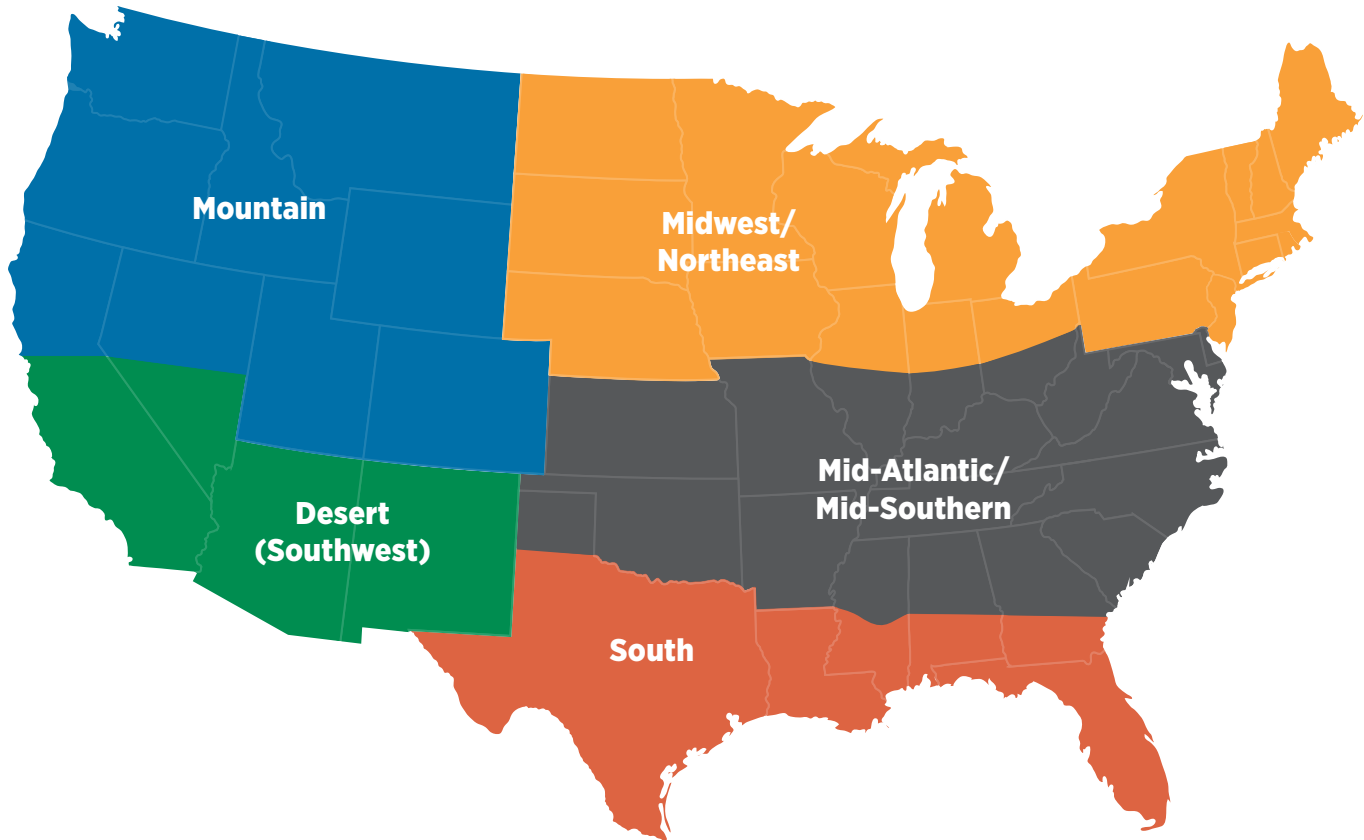

CLIMATE ZONE/RECOMMENDED APRILAIRE HUMIDIFIER SOLUTION BY MODEL

Equipment	MIDWEST/ NORTHEAST	MID-ATLANTIC/ MID-SOUTHERN	MOUNTAIN	SOUTH	DESERT (SOUTHWEST)
Gas/Oil Furnace-Single Stage or Multi Stage*	400/500/600/700/800	400/500/600/700/800	400/500/600/700/800	500/600/700/800	800
Gas/Oil Modulating Furnace**	700/800	700/800	700/800	700/800	800
Heat Pump/Geo-Single Stage or Multi Stage*	400†/500/600/700/800	400†/500/600/700/800	400†/500/600/700/800	500/600/700/800	800
Heat Pump/Geo-Modulating**	700/800	700/800	700/800	700/800	800
Boiler With AHU (No Heat Source)	800	800	800	800	800
Boiler With AHU and Hot Water Coil/ Hydro Air Unit	700/800	700/800	800	800	800
Boiler	300/865	300/865	300/865	300/865	300/865
Electric Baseboard Heating	300/865	300/865	300/865	300/865	300/865
Humidifying with A/C Unit	800	800	800	800	800

\*PSC, constant torque ECM












\*\*Variable speed ECM

†Evaporative performance of bypass humidifiers decreases with lower airflow volume and lower air temperature. Bypass models can be used in these applications if the HVAC system pressure differential between supply and return ducts is at least 0.08 in. wg and air temperature, hot water and continuous fan in the supply duct is at least 100°F.



# HUMIDITY CONTROL


Dehumidifiers - Part of the Aprilaire Healthy Air System

Dehumidifiers	Unit Size <sup>2</sup> Width x Height x Length	Capacity ppd = Pints Per Day	Airflow @ Varying E.S.P. (External Static Pressure - Dry Coil)	Unit Weight lbs.
 <p><b>#E070</b></p> 	12.5" x 12.5" x 25"	70 ppd	0.0" w.c. 200 CFM 0.2" w.c. 170 CFM 0.4" w.c. 140 CFM	56
 <p><b>#E080</b> <b>#E080H<sup>1</sup></b></p> 	14" x 15" x 26"	80 ppd	 0.0" w.c. 185 CFM 0.2" w.c. 135 CFM 0.4" w.c. 85 CFM	63
 <p><b>#E100</b> <b>#E100H<sup>1</sup></b> <b>#E100C<sup>2</sup></b></p> 	14" x 15" x 26"	100 ppd	 0.0" w.c. 280 CFM 0.2" w.c. 245 CFM 0.4" w.c. 210 CFM	64
 <p><b>#E130</b> <b>#E130H<sup>1</sup></b> <b>#E130C<sup>2</sup></b></p> 	19½" x 18¾" x 30"	130 ppd	 0.0" w.c. 310 CFM 0.2" w.c. 270 CFM 0.4" w.c. 225 CFM	98



<sup>1</sup>E080H, E100H and E130H are hardwired units <sup>2</sup>E100C and E130C are on casters

## DEHUMIDIFIER SIZING GUIDELINES

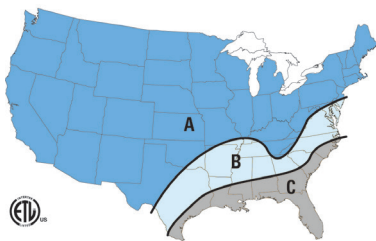

The recommended home floor area (ft<sup>2</sup>) that each listed dehumidifier can dehumidify is to be used as sizing guidelines only. The actual home size is dependent on the exact location of the home, the actual total ventilation rate, occupant living habits, moisture removal characteristics of the air conditioning system and the environmental conditions at which the occupants experience comfort. Values are for the most humid locations within each region.






**Provide on-demand sizing recommendations using the Dehumidifier Selection Assistant**  
[aprilairpartners.com/dsa](http://aprilairpartners.com/dsa)

	Model E080		Model E100		Model E130	
	Loose	Tight	Loose	Tight	Loose	Tight
Region A	3,200 Ft <sup>2</sup>	4,400 Ft <sup>2</sup>	4,000 Ft <sup>2</sup>	5,500 Ft <sup>2</sup>	5,200 Ft <sup>2</sup>	7,200 Ft <sup>2</sup>
Region B	2,600 Ft <sup>2</sup>	3,900 Ft <sup>2</sup>	3,200 Ft <sup>2</sup>	5,000 Ft <sup>2</sup>	3,900 Ft <sup>2</sup>	6,500 Ft <sup>2</sup>
Region C	1,600 Ft <sup>2</sup>	2,300 Ft <sup>2</sup>	2,000 Ft <sup>2</sup>	3,000 Ft <sup>2</sup>	2,300 Ft <sup>2</sup>	3,600 Ft <sup>2</sup>





# AIR FILTRATION

Air Cleaners - Part of the Aprilaire Healthy Air System

Air Cleaners		Nominal Size (in Inches)	Cabinet Size	Shipping Weight (lbs)	Included Filter	Compatible Filters*	
2000 SERIES		#2216	20 x 25	W: 6¾" H: 22½" D: 27⅞"	20	MERV 16	
		#2416	16 x 25	W: 6¾" H: 17¾" D: 30⅞"	19.25	216	213CBN, 213, 210
		#2516	31 x 28	W: 6¾" H: 31" D: 30⅞"	24.9	416	413CBN, 413, 410
		#2210	20 x 25	W: 6¾" H: 22½" D: 27⅞"	19	MERV 13	
		#2310	20 x 20	W: 6¾" H: 20⅝" D: 22⅞"	17	213	216, 213CBN, 210
		#2410	16 x 25	W: 6¾" H: 17¾" D: 30⅞"	19	313	310
1000 SERIES		#1110	16 x 20	W: 6¾" H: 17¾" D: 22⅞"	13	MERV 11	
		#1210	20 x 25	W: 6¾" H: 22⅞" D: 27⅞"	20	110	113
		#1310	20 x 20	W: 6¾" H: 20⅝" D: 22⅞"	15	210	216, 213CBN, 213
		#1410	16 x 25	W: 6¾" H: 17¾" D: 30⅞"	19	310	313
		#1510	31 x 28	W: 6¾" H: 31" D: 30⅞"	28	410	416, 413CBN, 413
		#1910	25 x 20	W: 6¾" H: 25⅞" D: 22⅞"	18	510	516, 513CBN, 513
			#1610	16 x 25	W: 15⅞" H: 17⅜" D: 30⅞"	31	910
	#1620		20 x 25	W: 15⅞" H: 22⅞" D: 27⅞"	32.4	410	416, 413CBN, 413
						210	216, 213CBN, 213
	5000 SERIES		#5000	16 x 25	W: 12" H (front): 18⅞" H (back): 17¾" D: 31"	35	ELECTRONIC Air Cleaner
					501		

\* Included filter model is also available as a replacement option.

## Filter Grille Air Cleaners\*

Aprilaire Filter Grille Air Cleaners	Model No.	Nominal Size (in Inches)	Filter Model	Shipping Weight
	1625FG11	16 x 25	610	16 lbs.
	1625FG13		613	
	2025FG11	20 x 25	810	18 lbs.
	2025FG13		813	



\*Recommended grille face velocity is 300-450 fpm. To minimize risk of noise, use two filter grilles on systems over 3.5 tons.



# AIR FILTRATION

Air Cleaner Filters – Part of the Aprilaire Healthy Air System

PRESSURE DROP CHART																
Filter No.	Static Pressures at Variable CFM (in. w.c.)*															
	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	
MERV 16 ALLERGY & ASTHMA	216		0.06	0.09	0.13	0.17	0.23	0.29	0.36							
	416		0.07	0.10	0.13	0.18	0.24	0.31								
	516		0.04	0.05	0.07	0.09	0.10	0.13	0.15	0.18	0.21	0.24	0.27	0.31		
MERV 13 HEALTHY HOME	113	0.03	0.07	0.11	0.16	0.22	0.29									
	213	0.02	0.04	0.06	0.09	0.12	0.15	0.19	0.23	0.27	0.31					
	313	0.03	0.05	0.09	0.13	0.17	0.23									
	413	0.02	0.05	0.07	0.10	0.14	0.17	0.22	0.26	0.31	0.37					
	513	0.01	0.02	0.04	0.05	0.05	0.07	0.08	0.10	0.11	0.13	0.15	0.17	0.18	0.20	0.23
	613	0.02	0.05	0.07	0.10	0.14	0.17	0.22	0.26	0.31	0.37					
	813	0.02	0.04	0.06	0.09	0.12	0.15	0.19	0.23	0.27	0.31					
	913		0.04	0.07	0.10	0.13	0.17	0.22	0.25	0.30	0.35					
MERV 13 ODOR REDUCTION	213CBN		0.04	0.07	0.10	0.13	0.17	0.21	0.25	0.30	0.35					
	413CBN		0.04	0.07	0.10	0.14	0.19	0.24	0.29	0.36	0.43					
	513CBN		0.03	0.04	0.05	0.07	0.08	0.10	0.12	0.15	0.17	0.20	0.22	0.25	0.29	0.32
MERV 11 CLEAN AIR	110	0.02	0.05	0.06	0.10	0.14	0.20									
	210	0.02	0.03	0.04	0.06	0.08	0.11	0.13	0.16	0.19	0.22					
	310	0.02	0.04	0.06	0.10	0.14	0.19									
	410	0.02	0.03	0.05	0.07	0.09	0.12	0.15	0.19	0.22	0.27					
	510	0.02	0.02	0.03	0.04	0.04	0.05	0.06	0.07	0.09	0.10	0.12	0.14	0.15	0.17	0.19
	610	0.02	0.03	0.05	0.07	0.09	0.12	0.15	0.19	0.22	0.27					
	810	0.02	0.03	0.04	0.06	0.08	0.11	0.13	0.16	0.19	0.22					
	910	-	0.03	0.05	0.07	0.09	0.12	0.15	0.18	0.22	0.27					
MERV 10	201	0.02	0.04	0.05	0.08	0.10	0.12	0.15	0.18	0.21	0.25					
	401	0.02	0.04	0.05	0.08	0.10	0.14	0.17	0.21	0.25	0.29					
EAC	501	0.02	0.04	0.05	0.08	0.10	0.14	0.17	0.21	0.25	0.29					

\*Highest value shown is maximum recommended airflow capacity.





# AIR FILTRATION

Air Cleaner Filters – Part of the Aprilaire Healthy Air System

REMOVAL EFFICIENCY (Based on Particle Size)			
	0.3–1.0 Microns	1.0–3.0 Microns	3.0–10.0 Microns
<b>MERV 16</b>	95%	98%	99%
<b>MERV 13</b>	63%	88%	93%
<b>MERV 11</b>	37%	67%	92%
<b>MERV 10</b>	22%	56%	92%
<b>EAC (Model 5000)</b>	89%	95%	98%

Test Method – MERV 10-16 –ASHRAE 52.2.2012, EAP – AHRI 680-2009

UPGRADE KITS		Nominal Size (in inches)	Compatible With	Included Filter	Rails Model Number	Static Pressure Drop (in. w.c.) @ 1200 CFM	Maximum Airflow Capacity (in CFM)	
<b>MERV 13</b>		<b>#1213</b>	20 x 25	Aprilaire/Space-Gard 2200	213	4893	0.15	2000
		<b>#1413</b>	16 x 25	Aprilaire/Space-Gard 2400	413	4894	0.17	2000

UPGRADE RAILS		Nominal Size (in inches)	Compatible With	Uses Filter Model	Maximum Airflow Capacity (in CFM)
	<b>#4893</b>	20x25	Aprilaire/Space-Gard 2200 or 2120	210, 213, 213CBN	2000
	<b>#4894</b>	16x25	Aprilaire/Space-Gard 2400 or 2140	410, 413, 413CBN	2000
	<b>#4897</b>	16x25	Models by (but not limited to): Carrier® Honeywell® Lennox® Ultravation® General® Trion®	610, 613	2000
		20x25		810, 813	2000
	<b>#4898</b>	16x20	110, 113	1200	
		20x20	310, 313	1200	

REPLACEMENT FILTERS					
Filter No.	Used with Aprilaire Air Cleaner Models	Nominal Size (in inches)	Static Pressure Drop (in. w.c.) @ 1200 CFM	Maximum Airflow Capacity (in CFM)	
<b>MERV 10</b>	<b>201</b>	Aprilaire/Space-Gard* 2200	20 x 25	0.12	2000
	<b>401</b>	Aprilaire/Space-Gard* 2400	16 x 25	0.14	2000

\*Air Cleaner models no longer available.



# HEALTHY AIR CONTROLS

Thermostats - Part of the Aprilaire Healthy Air System







		Non-Programmable	Programmable	Programmable with Event-Based™ Air Cleaning	Programmable Touch Screen	Programmable Touch Screen with Humidity Control	IAQ Control Equipment Control Module = 8 5/8" x 9 3/8" x 1 1/8"	
<b>Residential Model No. • Stages</b>		8444 • 1H/1C 8446 • 2H/1C HP 8448 • 2H/2C, 4H/2C HP	8463 • 1H/1C 8465 • 2H/1C HP 8466 • 2H/2C, 4H/2C HP	8476W** 8476 • 2H/2C, 4H/2C HP	8600 • 2H/2C, 4H/2C HP	8620W** 8620 • 2H/2C, 4H/2C HP	8910W** 8910 • 3H/3C, 4H/2C HP	8920W** • 3H/3C, 4H/2C HP
<b>Home Automation Model No.</b>		-	-	8810	8800	8820	8830	8840
<b>Dimensions (W x H x D)</b>		5 1/4" x 4 1/2" x 1"			6" x 4 15/16" x 1 15/16"		6" x 4 1/20" x 1 1/4"	7 1/10" x 4 1/20" x 1"
<b>Temperature Control</b>	Easy to Read Display	●	●	●	●	●	●	●
	Simple Setup	●	●	●	●	●	●	●
	Displays Outdoor Temperature (if equipped)	●	●	●	●	●	●	●
	Adjustable Differential	●	●	●	●	●	●	●
	Progressive Recovery		●	●	●	●	●	●
	Heat Blast					●	●	●
<b>Air Cleaning</b>	Event-Based™ Air Cleaning			●		●	●	●
	Air Cleaning Notice			●		●	●	●
	Change Filter Alert	●	●	●	●	●	●	●
<b>Humidifier Control</b>	Automatic or Manual Humidifier Control					●	●	●
	"Humidifier On" Notice					●	●	●
	Displays Indoor RH					●	●	●
	Energizes HVAC Blower for Humidity					●	●	●
	Controls Humidifier with 24 VAC Dry Contact					●	●	●
<b>Dehumidifier Control</b>	Controls Whole-Home Dehumidifier					●	●	●
	Controls A/C Equipment for Dehumidification					●	●	●
	Displays Indoor RH					●	●	●
	"Dehumidifier On" Notice					●	●	●
	Energizes HVAC Blower for Dehumidification					●	●	●
	Controls Dehumidifier with 24 VAC Dry Contact					●	●	●
<b>Ventilation Control</b>	Programmable for Timed Ventilation					●	●	●
	Programmable for ASHRAE 62.2 Ventilation					●	●	●
	Configurable Temperature and Humidity Limits					●	●	●
	"Ventilation On" Notice					●	●	●
<b>Product Configuration</b>	Controls Air Cleaner and Humid or Dehumid or Vent					●		
	Controls Air Cleaner and Humid, Dehumid and Vent						●	●
	Wired Outdoor Temperature Sensor Included					●	●	●
	Two-Part Design - Only 3 Wires to the Living Space						●	●

\*\* Wi-Fi, amazon alexa compatible and Google Assistant compatible





# Zone Control Systems

6000 Series Product Configurations		
Kits	Black	White
2-Zone	<b>Model 6010: 2-Zone Complete Kit*</b> 	<b>Model 6015: 2-Zone Complete Kit*</b> 
	<b>Model 6020: 3-Zone Complete Kit*</b> 	<b>Model 6025: 3-Zone Complete Kit*</b> 
Individual Components	Model 6030: 2-Zone Base Model 6040: 3-Zone Base Model 6050: Secondary Zone UI	Model 6035: 2-Zone Base Model 6045: 3-Zone Base Model 6055: Secondary Zone UI

\* Kits include outdoor temperature sensor along with duct probe


# Zone Control Panels

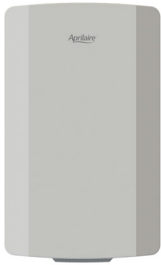Model		Specifications		
Universal		<b>6404 – 4 Zone Universal Multistage</b> (Can be expanded to 12 zones with Model 6401)  <b>6403 – 3 Zone Universal Multistage</b> + 2 Heat 2 Cool or 4 Heat 2 Cool (Heat Pump)  + Compatible with Model 8056 wireless outdoor sensor	<b>Overall Dimensions</b> 8 <sup>63</sup> / <sub>100</sub> " W x 14 <sup>18</sup> / <sub>25</sub> " H x 1 <sup>45</sup> / <sub>50</sub> " D  <b>Humidity</b> 5%-90% RH, non-condensing  <b>Operating Temperature</b> 32°F-158°F  <b>Shipping Temperature</b> -40°F-180°F  <b>Voltage</b> 18-30VAC 50/60 Hz	<b>Maximum Current</b> Damper output per zone (fused): 18VA at 158°F, 30VA at 90°F zone panel and thermostats (fused): 18VA at 158°F, 30VA at 90°F zone panel consumption: 4VA max Note: Use 18 or 20 AWG solid (non-stranded) wire
		<b>Zoned Comfort Control™ Kits** Available: 6404K &amp; 6403K</b>		
Heat Pump Only		<b>6303 – 3 Zone Heat Pump</b> <b>6302 – 2 Zone Heat Pump</b> + 2 Heat 1 Cool Single Stage	<b>Overall Dimensions</b> 8 <sup>63</sup> / <sub>100</sub> " W x 9 <sup>33</sup> / <sub>50</sub> " H x 1 <sup>45</sup> / <sub>50</sub> " D  <b>Humidity</b> 5% - 90% RH, non-condensing  <b>Operating Temperature</b> 32°F-158°F  <b>Shipping Temperature</b> -40°F-180°F  <b>Voltage</b> 18-30VAC 50/60 Hz	<b>Maximum Current</b> Damper output per zone (fused): 18VA at 158°F, 30VA at 90°F zone panel and thermostats (fused): 18VA at 158°F, 30VA at 90°F zone panel consumption: 4VA max Note: Use 18 or 20 AWG solid (non-stranded) wire
		<b>Zoned Comfort Control™ Kits** Available: 6303K &amp; 6302K</b>		
Conventional Only		<b>6203 – 3 Zone Heat/Cool</b> <b>6202 – 2 Zone Heat/Cool</b> + 1 Heat 1 Cool Single Stage	<b>Overall Dimensions</b> 8 <sup>63</sup> / <sub>100</sub> " W x 9 <sup>33</sup> / <sub>50</sub> " H x 1 <sup>45</sup> / <sub>50</sub> " D  <b>Humidity</b> 5%-90% RH, non-condensing  <b>Operating Temperature</b> 32°F-158°F  <b>Shipping Temperature</b> -40°F-180°F  <b>Voltage</b> 18-30VAC 50/60 Hz	<b>Maximum Current</b> Damper output per zone (fused): 18VA at 158°F, 30VA at 90°F zone panel and thermostats (fused): 18VA at 158°F, 30VA at 90°F zone panel consumption: 4VA max Note: Use 18 or 20 AWG solid (non-stranded) wire
		<b>Zoned Comfort Control™ Kits** Available: 6303K &amp; 6302K</b>		

\*\* Zoned Comfort Control Kits include: Zone panel, 6" duct probe and 24V 40VA universal transformer






# Zone Dampers

Rectangular Damper Size & Stock No.*												
Nominal Width (in inches)												
8"	10"	12"	14"	16"	18"	20"	22"	24"	26"	28"	30"	
(203mm)	(254mm)	(305mm)	(356mm)	(406mm)	(457mm)	(508mm)	(559mm)	(610mm)	(660mm)	(711mm)	(762mm)	

Side Mount Motor mounted on short dimension W3 indicates power open/ power closed	Nominal Height (in inches)	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"	28"	30"
		(203mm)	(254mm)	(305mm)	(356mm)	(406mm)	(457mm)	(508mm)	(559mm)	(610mm)	(660mm)	(711mm)	(762mm)
	8"	6721 6721W3	6722 6722W3	6723 6723W3	6724 6724W3	6725 6725W3	6726 6726W3	6727 6727W3	6728 6728W3	6729 6729W3	6730 6730W3	6731 6731W3	6753 6753W3
	10"		6732 6732W3	6733 6733W3	6734 6734W3	6735 6735W3	6736 6736W3	6737 6737W3	6738 6738W3	6739 6739W3	6740 6740W3	6741 6741W3	6742 6742W3
	12"			6743 6743W3	6744 6744W3	6745 6745W3	6746 6746W3	6747 6747W3	6748 6748W3	6749 6749W3	6750	6751	6752
	14"				6754 6754W3	6755 6755W3	6756 6756W3	6757 6757W3	6758 6758W3	6759 6759W3	6760	6761	6762
	16"					6763 6763W3	6764	6765	6766	6767	6768	6769	6770
	18"						6771	6772	6773	6774	6775	6776	6777
	20"							6778	6779	6780	6781	6782	6783
	22"								6784	6785	6786	6787	6788
	24"									6789	6790	6791	6792
	26"										6793	6794	6795
	28"											6796	6797
30"												6798	
Bottom Mount Motor mounted on long dimension	8"	6721 6721W3	6812 6812W3	6813 6813W3	6814 6814W3	6815 6815W3	6816 6816W3	6817 6817W3	6818 6818W3	6819 6819W3			
	10"		6732 6732W3	6823 6823W3	6824 6824W3	6825 6825W3	6826 6826W3	6827 6827W3	6828 6828W3	6829 6829W3			
	12"			6743 6743W3	6834 6834W3	6835 6835W3	6836 6836W3	6837 6837W3	6838 6838W3	6839 6839W3			

\* Rectangular Damper Dimension = Nominal width + 3.5"  
 † 10 day lead time for shaded items

# Zone Dampers

		Round Damper Size & Stock No. *										
		Nominal Diameter (In Inches)										
		4" (102mm)	5" (127mm)	6" (152mm)	7" (178mm)	8" (203mm)	9" (229mm)	10" (254mm)	12" (305mm)	14" (356mm)	16" (406mm)	18" (457mm)
 <p><b>Zone Damper</b> (Normally open/power closed) <i>W3 indicates power open/power closed</i></p>			6606 6606W3	6607 6607W3	6608 6608W3	6609 6609W3	6610 6610W3	6612 6612W3	6614 6614W3	6616 6616W3	6618	6620
			H: 10 <sup>3</sup> / <sub>4</sub> "	H: 10 <sup>3</sup> / <sub>4</sub> "	H: 10 <sup>3</sup> / <sub>4</sub> "	H: 10 <sup>3</sup> / <sub>4</sub> "	H: 10 <sup>3</sup> / <sub>4</sub> "	H: 12 <sup>3</sup> / <sub>4</sub> "	H: 14 <sup>3</sup> / <sub>4</sub> "	H: 16 <sup>3</sup> / <sub>4</sub> "	H: 19 <sup>3</sup> / <sub>16</sub> "	H: 22"
 <p><b>Ventilation Damper</b> (Normally closed/power opened)</p>			6506		6508		6510					
			H: 10 <sup>3</sup> / <sub>4</sub> "		H: 10 <sup>3</sup> / <sub>4</sub> "		H: 10 <sup>3</sup> / <sub>4</sub> "					
 <p><b>Barometric Pressure Relief</b> (Air flow activated)</p>					6108		6110	6112	6114	6116		
					H: 10 <sup>3</sup> / <sub>4</sub> "		H: 10 <sup>3</sup> / <sub>4</sub> "	H: 12 <sup>3</sup> / <sub>4</sub> "	H: 14 <sup>3</sup> / <sub>4</sub> "	H: 16 <sup>3</sup> / <sub>4</sub> "		
 <p><b>Static Pressure Relief</b> (Power activated)</p>					6208		6210	6212	6214	6216	6218	6220
					H: 8"		H: 10"	H: 12"	H: 14"	H: 16"	H: 18"	H: 20"
 <p><b>Round Slip-In Damper</b> (Normally open/power closed)</p>	6704	6705	6706	6707	6708		6710					
	W: 3 <sup>5</sup> / <sub>16</sub> " H: 12 <sup>3</sup> / <sub>16</sub> " D: 7 <sup>3</sup> / <sub>16</sub> "	W: 3 <sup>5</sup> / <sub>16</sub> " H: 12 <sup>3</sup> / <sub>16</sub> " D: 8 <sup>3</sup> / <sub>16</sub> "	W: 3 <sup>5</sup> / <sub>16</sub> " H: 12 <sup>3</sup> / <sub>16</sub> " D: 9 <sup>3</sup> / <sub>16</sub> "	W: 3 <sup>5</sup> / <sub>16</sub> " H: 12 <sup>3</sup> / <sub>16</sub> " D: 10 <sup>3</sup> / <sub>16</sub> "	W: 3 <sup>5</sup> / <sub>16</sub> " H: 12 <sup>3</sup> / <sub>16</sub> " D: 11 <sup>3</sup> / <sub>16</sub> "		W: 3 <sup>5</sup> / <sub>16</sub> " H: 12 <sup>3</sup> / <sub>16</sub> " D: 13 <sup>3</sup> / <sub>16</sub> "					










\* Round Damper Dimension = Nominal diameter + 4.5"

† 10 day lead time for shaded items






# FRESH AIR VENTILATION

## Ventilators and Ventilating Dehumidifiers - Part of the Aprilaire Healthy Air System


Ventilation Systems	Unit Size	Shipping Weight lbs.	Airflow 0.2 in. w.c. @ (CFM)	Description
<b>VENTILATING DEHUMIDIFIERS</b>				
 <p><b>#E100V + 8190FF</b></p> <p>100 ppd*</p> <p>Most Efficient 2021 ENERGY STAR</p>	<p>W: 14½"</p> <p>H: 23½"</p> <p>L: 48¼"</p>	<p>82.00 (E100V)</p> <p>16.80 (8190FF)</p>	150	<p>The Ventilating Dehumidifier (Models E100V + 8190FF) brings in fresh air to meet ventilation needs while removing excess humidity from the incoming outdoor air. Fresh air is brought in whenever the HVAC system or dehumidifier is running to meet that need. If the required time is not met through these run cycles, the ventilating dehumidifier will bring in fresh air and remove any excess humidity.</p>
 <p><b>#8192A</b></p> <p>100 ppd*</p>	<p>W: 15"</p> <p>H: 14"</p> <p>L: 26"</p>	82.00	245	<p>The 8192A features an integrated ventilation control. It draws fresh air into the home by energizing its fan and opening its vent damper. If the incoming air is above a set relative humidity percentage point, the outside air is dehumidified by the 8192A.</p> <p>*Dehumidification Capacity 100 Pints Per Day</p>
<b>FRESH AIR VENTILATORS</b>				
 <p><b>#8145</b></p> <p><b>#8145NC</b></p> <p><b>#8145K</b></p> <p>Most Efficient 2021 ENERGY STAR</p>	<p>W: 12¼"</p> <p>H: 11¾"</p> <p>L: 23⅜"</p>	<p>15.00 (8145)</p> <p>14.50 (8145NC)</p> <p>21.00 (8145K)</p>	210	<p>The 8145 or 8142 delivers fresh air into the return or supply duct by energizing its fan and opening its integrated damper. Both models feature an 8120X ventilation controller integrated into the unit. NC models do not include an on-board controller so that ventilation can be controlled via thermostat. The 8145K comes with 8145NC, 8120X control, inlet hood and start collar for adding ventilation to existing homes and systems.</p>
 <p><b>#8142</b></p> <p><b>#8142NC</b></p>	<p>W: 13⅝"</p> <p>H: 6⅞"</p> <p>L: 11⅞"</p>	<p>11.50</p> <p>10.75</p>	210	
 <p><b>#8144NC</b></p> <p>Most Efficient 2021 ENERGY STAR</p>	<p>W: 10¼"</p> <p>H: 18⅞"</p> <p>D: 10¼"</p>	20.50	130	<p>The 8144NC provides continuous low-volume ventilation for smaller single- and multi-family homes. A separate 8120X ventilation controller can be added to set the unit to operate by the controller's Code or Comfort functions.</p>
<b>VENTILATION CONTROLLER</b>				
 <p><b>#8120X</b></p>	<p>W: 4<sup>11</sup>/<sub>100</sub>"</p> <p>H: 3<sup>3</sup>/<sub>8</sub>"</p> <p>D: 1<sup>5</sup>/<sub>100</sub>"</p>	.50		<p>The 8120X engages a fan or damper on ventilation solutions to deliver fresh air to return or supply duct. The control can be programmed to deliver the correct amount of fresh air required by code, or it can provide fresh air within set high/low outdoor temperature and indoor RH limits.</p>
<b>VENTILATION SYSTEM</b>				
 <p><b>#8126X</b></p>	<p>W: 10<sup>9</sup>/<sub>25</sub>"</p> <p>H: 10<sup>3</sup>/<sub>4</sub>"</p> <p>D: 6"</p>	6.50		<p>The 8126X includes a powered damper, ventilation controller, and installation accessories. The controller energizes the damper, mounted on the return side of the HVAC blower. When the HVAC blower energizes, negative pressure draws fresh air into the home.</p>
<b>KITCHEN VENTILATION KITS</b>				
 <p><b>#6508KV</b></p> <p><b>#6510KV</b></p>	<p>W: 8"</p> <p>H: 10<sup>3</sup>/<sub>4</sub>"</p> <p>D: 12<sup>1</sup>/<sub>8</sub>"</p> <p>W: 10"</p> <p>H: 10<sup>3</sup>/<sub>4</sub>"</p> <p>D: 14<sup>1</sup>/<sub>8</sub>"</p>	<p>6.00</p> <p>6.70</p>	<p>185</p> <p>390</p>	<p>The 6508KV, 6510KV Kitchen Ventilation Kits provide make-up air locally to areas where high-CFM range hoods (typically near 400 CFM or above) are used to prevent home depressurization and its undesired side effects.</p>
<b>FRESH AIR EXCHANGER (ERV)</b>				
 <p><b>#8100</b></p>	<p>W: 37<sup>3</sup>/<sub>8</sub>"</p> <p>H: 20<sup>3</sup>/<sub>4</sub>"</p> <p>D: 12<sup>3</sup>/<sub>4</sub>"</p>	87.00	130	<p>The 8100 draws in fresh outdoor air and exhausts stale indoor air, transferring energy (heating or cooling) between the two air sources, as well as transferring moisture from the higher moisture airstream to the airstream with lower moisture. This creates a balanced airflow and eliminates pressure. A ventilation controller or thermostat (both sold separately) energizes blowers within the ventilator.</p>

# Accessories

Accessories	Product Description	Unit Size	Type of Wire	Compatible Models
 <b>#8051</b>	<b>Flush Mount Sensor</b> Ideal for residential or light commercial applications where customer requires nothing to be seen on the wall.	<b>Disk:</b> 1½" dia. Friction fit in a 1" opening. Air gap of ¼" required.	18-24 gauge 2 conductor wire (or more conductors)	8600 8620 8620W
 <b>#8052</b>	<b>Outdoor/Duct Sensor</b> Designed for outdoor or duct installation including with use of zone control panels.	<b>Probe:</b> ¼" dia. x 1¾" L <b>Bracket:</b> ¾" x ¾"		8910 8910W 8920W
 <b>#8053</b>	<b>Surface Mount Sensor</b> Perfect for light indoor commercial applications to prevent tampering.	<b>W:</b> 3½" <b>H:</b> 2½" <b>D:</b> ⅞"		8800 8820 8830 8840
 <b>#8022</b>	<b>3-Wire to 4-Wire Adapter</b> Used to add a wire to a thermostat, fix a broken wire or add a common wire to a 4-wire system.	<b>W:</b> 2⅞" <b>H:</b> 1¾" <b>D:</b> 1¼"		All thermostats
 <b>#8028</b>	<b>Damper Power Distribution Panel</b> For applications where needed dampers outnumber control capability of any Aprilaire Zone Control Panel.	<b>W:</b> 10½" <b>H:</b> 5" <b>D:</b> 1⅞"	18-22 gauge stranded or solid thermostat wire can be used for all wire runs	All zone control panels
 <b>#6401</b>	<b>Expansion Panel</b> Two-zone expansion panel that supports 2-wire or 3-wire dampers.	<b>W:</b> 10½" <b>H:</b> 5" <b>D:</b> 1⅞"		6404 With LCD screen
<b>AUTOMATION MODULES</b>				
 <b>#8081</b>	<b>Temperature Support Module</b> Averages up to eight temperature locations per thermostat.	<b>W:</b> 3½" <b>H:</b> 2½" <b>D:</b> ⅞"	Cat 6 or greater	8800 8820 8830 8840
 <b>#8082</b>	<b>Temperature and RH Support Module</b> Averages four temperatures (on-board or off-board) and four humidity values (on-board only).	<b>W:</b> 3½" <b>H:</b> 2½" <b>D:</b> ⅞"		
 <b>#8083</b>	<b>Flush Temperature and RH Support Module</b> Averages four temperature and four RH values.	<b>Disk:</b> 1½" dia. <b>Cylinder Hole:</b> 1" off wall, ¼" air gap		

# Ventilation climate zones

Managing the quality of ventilated air delivered into the home is critical to providing a healthy indoor environment. The requirements change significantly based on climate. Aprilaire ventilation solutions work with the HVAC equipment to remove moisture, harmful particulates and other contaminants such as VOCs. It's critical to use intelligent ventilation controls and application guidance to properly ventilate rather than relying on exhaust ventilation which simply pulls air through walls.

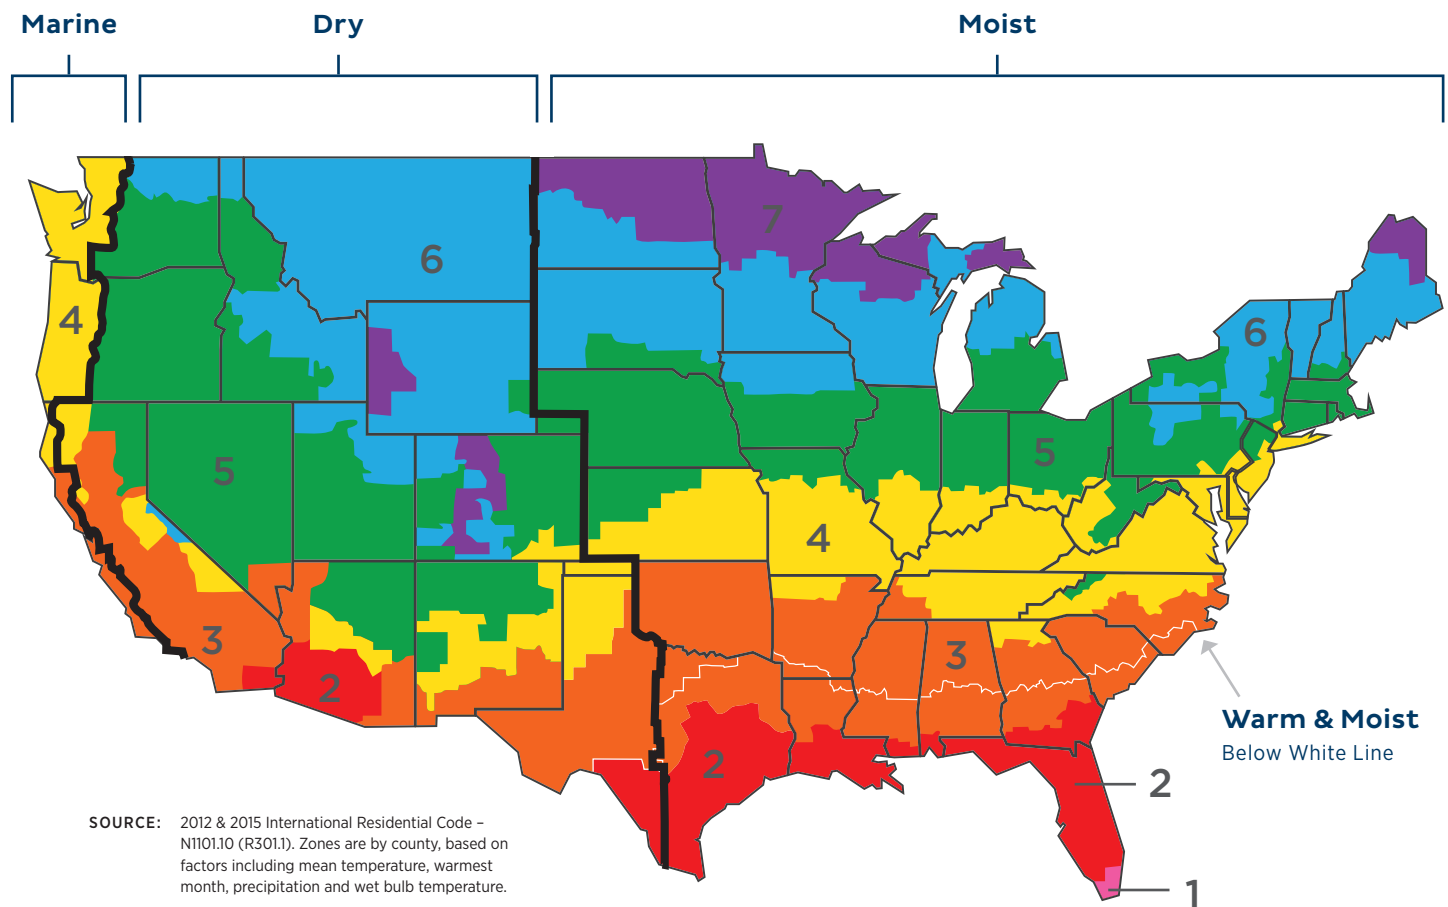

Use this map and the adjoining application guide to determine the recommended product solution for your climate. These recommendations are based on moisture removal demands, energy savings and integration with the HVAC equipment.

# Ventilation Supply Solutions

## Aprilaire Ventilation Application Matrix

ZONE	CLIMATE TYPE	MAJOR CITIES	PRIMARY SOLUTION <sup>1</sup>	FRESH AIR DUCTED <sup>2</sup>	ECONOMY- OR COMFORT-FOCUSED SOLUTION	MULTI-FAMILY NEW CONSTRUCTION SOLUTION
1	Hot & Moist	Miami	<b>E100V + 8190FF or 8192A</b> Dehumidifies incoming ventilation air	HVAC Return	<b>8145 or 8126X</b>	<b>8144NC</b>
2	Hot & Moist	Orlando, Mobile, New Orleans, Houston, Austin, San Antonio	<b>E100V + 8190FF or 8192A</b> Dehumidifies incoming ventilation air	HVAC Return	<b>8145 or 8126X</b>	<b>8144NC</b>
2	Hot & Dry	Phoenix, Tucson	<b>8142</b> Mixes ventilation air after cooling or heating	HVAC Supply	<b>8126X</b>	<b>8144NC</b>
3	Warm & Moist	Charlotte, Charleston, Atlanta, Little Rock, Oklahoma City, DFW	<b>E100V + 8190FF or 8192A</b> Dehumidifies incoming ventilation air	HVAC Return	<b>8145 or 8126X</b>	<b>8144NC</b>
3	Warm & Dry	El Paso, Las Vegas, Los Angeles, Sacramento	<b>8142</b> Mixes ventilation air after cooling or heating	HVAC Supply	<b>8126X</b>	<b>8144NC</b>
3	Warm & Marine	San Francisco, San Jose	<b>8142</b> Mixes ventilation air after cooling or heating	HVAC Supply	<b>8145 or 8126X</b>	<b>8144NC</b>
4	Mixed & Moist	Philadelphia, Washington DC, Baltimore, Nashville, St. Louis, Wichita, Louisville	<b>8145</b> Mixes ventilation air prior to cooling or heating	HVAC Return	<b>E100V + 8190FF, 8192A or 8126X</b>	<b>8144NC</b>
4	Mixed & Dry	Albuquerque, Amarillo	<b>8142</b> Mixes ventilation air after cooling or heating	HVAC Supply	<b>8145 or 8126X</b>	<b>8144NC</b>
4	Mixed & Marine	Portland, Seattle	<b>8142</b> Mixes ventilation air after cooling or heating	HVAC Supply	<b>8145 or 8126X</b>	<b>8144NC</b>
5	Cool & Moist	Boston, Pittsburgh, Columbus, Indianapolis, Detroit, Chicago, Des Moines, Omaha	<b>8145</b> Mixes ventilation air prior to cooling or heating	HVAC Return	<b>8126X</b>	<b>8144NC</b>
5	Cool & Dry	Denver, Salt Lake City, Boise, Reno	<b>8145</b> Mixes ventilation air prior to cooling or heating	HVAC Supply or Return	<b>8142 or 8126X</b>	<b>8144NC</b>
6	Cold & Moist	Toronto, Vancouver, Milwaukee, Madison, Minneapolis-St Paul, Sioux Falls	<b>8145</b> Mixes ventilation air prior to cooling or heating	HVAC Return	<b>8126X</b>	<b>8144NC</b>
6	Cold & Dry	Helena, Cheyenne	<b>8145</b> Mixes ventilation air prior to cooling or heating	HVAC Return	<b>8126X</b>	<b>8144NC</b>
7	Extreme Cold & Moist	Fargo, Duluth, Calgary, Edmonton	<b>8145</b> Mixes ventilation air prior to cooling or heating	HVAC Return	<b>8126X</b>	<b>8144NC</b>

<sup>1</sup> Primary Aprilaire recommended supply ventilation solution for optimal performance and building code adherence.

<sup>2</sup> HVAC application considerations based upon moist versus dry air, and proper mixing into the ductwork.

# EFFECTIVE VIRUS PROTECTION



Install the **Aprilaire Healthy Air System™** today!