




FOR WOOD




Straight Screws
For 3/8" All-thrd rod
Min. 1/4" Steel
Min 1-1/2" Wood

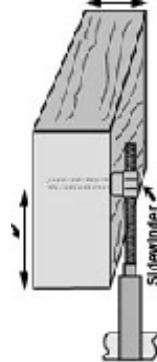

Sidewinders Screws
For 3/8" All-thrd rod
Designated by "SW"

FOR STEEL



TEK 50 Self-drills & Self-taps into steel up to 1/2" thick. SWDR & DST self-drills & self-taps through 3/16" steel and accepts retainer nut.

FOR CONCRETE



Use 20 ft/lbs torque on nut. For CST use 1/4" bit & drill 2" deep in concrete.



"SAMMY" SCREWS® FOR WOOD

Fits 3/8" threaded rod

W-R#	Pattern	Length	Sammy#	Box
2440001	Straight	1"	GST-10	25
2440002	Straight	2"	GST-20	25
2440019	Straight	2 1/2"	GST-25-380	25
2440015	Straight	3"	GST-30	25

2440003	Sidewinder	1"	SWG-10	25
2440028	Sidewinder	2"	SWG-20	25
2440004	Sidewinder	2 1/2"	SWG-25-380	25
2440016	Sidewinder	3"	SWG-30	25



"SAMMY" SCREWS® FOR STEEL

Fits 3/8" threaded rod

"*" items are furnished with retaining nut

W-R#	Pattern	Length	Sammy#	Box
2440006	Straight	1"	DST-10	25
* 2440020	Straight	1"	DSTR-1	25
* 2440022	Straight	1 1/4"	DSTR516	25
2440010	Straight	1 1/2"	TEK-50	25
2440018	Straight	2"	DST-20	25

* 2440008	Sidewinder	1 1/4"	SWDR516	25
2440026	Sidewinder	1 1/2"	SWDR112	25



"SAMMY" SCREWS® FOR CONCRETE

Fits 3/8" threaded rod

W-R#	Pattern	Length	Sammy#	Box
2440012	Straight	1 1/2"	CST-20	25

2440014	Sidewinder	1 1/2"	SWC-20	25
---------	------------	--------	--------	----