

RESCUE EZ-Wire® Motor in Clear Pack

EZ-Wire® Condenser

Horsepower: 1/3-1/8 HP

Speed: 1075 and 825 RPM

Rated Voltage: 208-230V

Ambient Rating: 80°C (176°F)

Frame: 48

Enclosure: Totally Enclosed Air Over (TEAO)

Mounting: All position mount, extended mounting studs
and Rheem® Side Shell Holes

NEW!
Easy to wire
Easy to view
Easy to showcase

EZ-Wire Condenser						
Catalog Number	HP	RPM	Voltage	Amps	Leads	Capacitor
5430	1/3-1/6	1075	208-230	2.2	48"	7.5 MFD @ 440V
5431	1/4-1/8	825	208-230	2.1	48"	7.5 MFD @ 440V



EZ-Wire® Direct Drive Fan and Blower

Horsepower: 1/2-1/6 HP

Speed: 1075/4 SPD

Rated Voltage: 115 or 208-230V

Ambient Rating: 40°C (104°F)

Frame: 48

Enclosure: Open Air Over (OAO)

Mounting: All position mount and

Rheem® Side Shell Holes

EZ-Wire Direct Drive Fan and Blower						
Catalog Number	HP	RPM	Voltage	Amps	Leads	Capacitor
5432	1/2-1/6	1075/4 SPD	115	7.3	36"	10/7.5 MFD @ 370V
5433	1/2-1/6	1075/4 SPD	208-230	3.6	36"	10/5 MFD @ 370V



Product Overview and Options

Our motors bring all the value that you expect from the U.S. MOTORS® brand:

Ball Bearings – Durability for high temperature applications for longer life than traditional sleeve bearings

Special Rotor Corrosion Protection for Condenser Motors – Designed for longer life and sure start-ups season after season


Reversible – Easy to change quick connect terminals for application flexibility

Capacitors – USA made capacitors included

Order One of Three Ways



Catalog Number: 5430-SKD, 5431-SKD, 5432-SKD,
5433-SKD
Market motors on your floor for maximum visibility
90 per skid

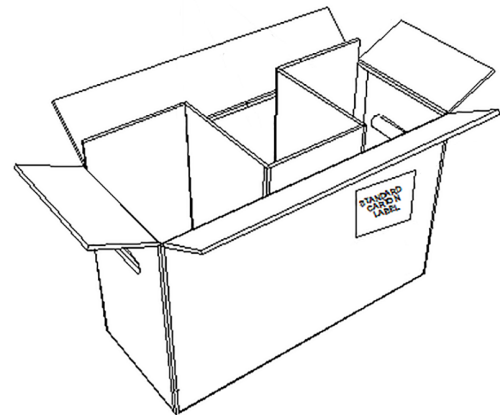

Catalog Number: 5430, 5431, 5432, 5433
Convenient 3-pack for additional
smaller displays

Full Skid of 90 motors
in 3-pack form
(Skid = 30 3-packs)