



Select Pro™

PREPROGRAMMED WITH THE OPTION TO MATCH THE OEM PROFILE

ECM REPLACEMENT FOR FURNACES AND AIR HANDLERS



Truck Stock



OEM Direct Replacement



Programmable and Tunable in Operation



Replaces Thousands of OEM Models

Improved Reliability With:



Built-in 6,000 Volt surge protection



Industry-leading moisture protection



Integrated Bluetooth® Technology

Preprogrammed, Ready to install!

No additional programming tool required!

To unlock advanced features, download the RESCUE Select Pro programming app:

- OEM direct programming
- Customized airflow in operation
- Real-time diagnostics

FREE from Google Play or the App store



GET IT ON Google Play




Download on the App Store



SPECIFICATIONS

HORSEPOWER: 1/3, 1/2, 3/4 and 1 HP
VOLTAGE: 1Ø, 115, 208-230 Vac
SPEEDS: Programmable (1075/Var)
ROTATION: Programmable (CCW or CW)
INPUTS: 24Vac, Tap Inputs
HERTZ: 50/60 Hz

OPERATION MODE: Constant Torque
FRAME: NEMA® 48
ENCLOSURE: Open Air Over (OAO)
EFFICIENCY: Up to 82%
MOUNTING: Belly-band

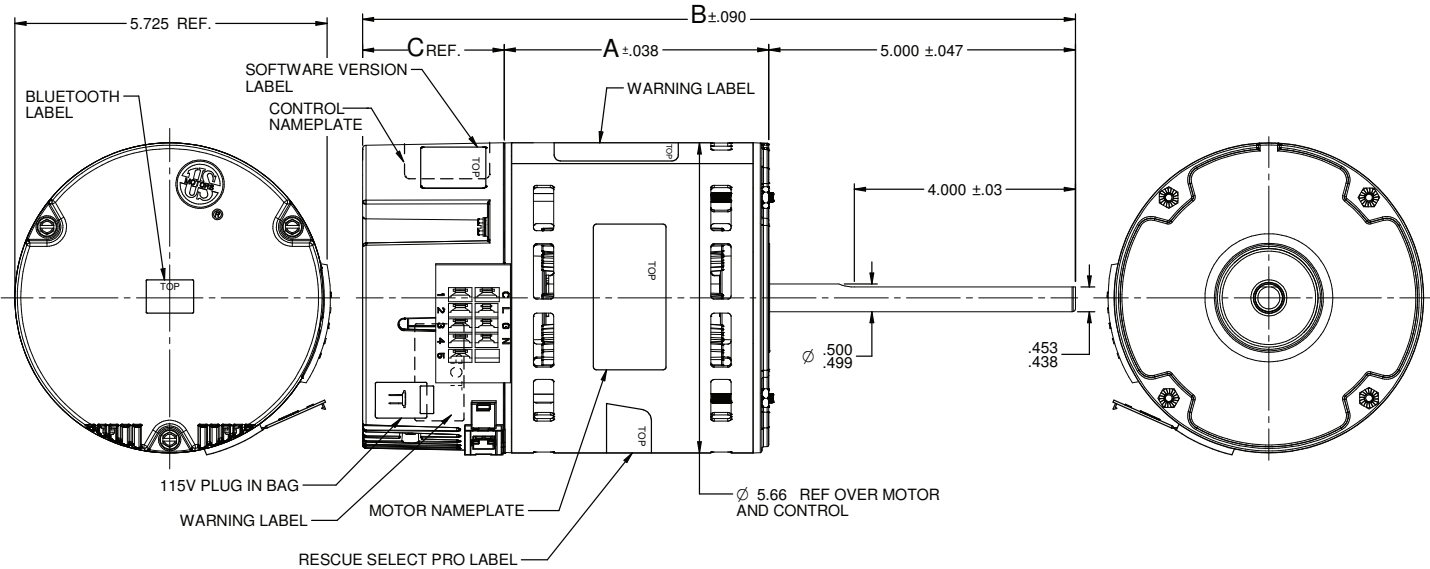

CATALOG NUMBER	HP	VOLTS	AMPS	RPM	DIM. A	DIM. B
6633	1/2 -1/3	115/208-230	6.3/4.0-3.8	1075/Var	3.662	11.225
6643	3/4	115/208-230	9.3/5.8-5.4	1075/Var	4.037	11.6
6653	1	115/208-230	12.4/7.8-7.2	1075/Var	4.412	11.975



8050 W. Florissant Avenue | St. Louis, MO 63136
 Phone: 855-487-6686 | Fax: 800-899-2887

© Nidec 2021; All Rights Reserved.

21-8527-01 Select Pro PDS

Scan to watch
 RESCUE Select Pro
 Overview Training Video

