


**70 CONDENSATE DRAIN**

Authorized, Cost Effective Replacement Drain for Most Commercial Refrigerators and Freezers.

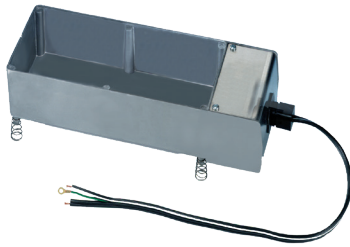

- PTC Control Supplies Only Required Heat to Evaporate Water
- Thermostat and Float NOT Required
- Self Regulating
- Uniform Heating
- UL® and CSA® (where noted) Approved
- Die Cast Aluminum Eliminates Corrosion
- Removable Cord Set for Easy Cleaning
- Fast Evaporation Rate (6 oz./hour)
- Low Profile (3") to Fit Tight Spaces

Part No.	Capacity	Volts	Watts	Amps	Evap. Rate	Size
70	50 oz.	120	300	2.61	4.5 oz/hr	12 1/4" x 4 3/4" x 3"
70-220	50 oz.	240	300	1.36	6 oz/hr	12 1/4" x 4 3/4" x 3"
70CSA*	50 oz.	120	190	1.65	6 oz/hr	12 1/4" x 4 3/4" x 3"
70CSA220*	50 oz.	240	190	.86	6 oz/hr	12 1/4" x 4 3/4" x 3"

\*CSA indicates CSA approval. \*\* All are 50/60 HZ

**30-OS, 31 & 75 CONDENSATE DRAINS**



- Standard Cast Aluminum Condensate Drains Complete with Long Life Heating Element and Mounting Legs
- Designed for Continuous Use

Part No.	Capacity	Volts	Watts	Amps	Evap. Rate	Size
30-OS	32 oz.	120	160	1.33	8 oz/hr	10" x 4" x 2 7/8"
30-220-OS	32 oz.	240	160	.73	8 oz/hr	10" x 4" x 2 7/8"
31	50 oz.	120	160	1.33	6 oz/hr	10" x 4 1/2" x 3 3/8"
31-220	50 oz.	240	160	.73	6 oz/hr	10" x 4 1/2" x 3 3/8"
75	75 oz.	120	320	2.67	14 oz/hr	10" x 9" x 2 3/4"
75-220	75 oz.	240	320	1.45	14 oz/hr	10" x 9" x 2 3/4"

\*\* All are 50/60 HZ

**30WM WALL MOUNT BRACKET**



- Wall bracket accessory for 30-OS series and 75 series pans
- Can also be used with 31 series pans