
DIGITAL PSYCHROMETER

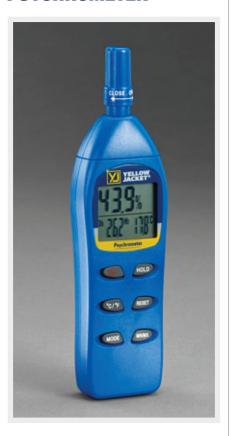

Quickly measure humidity, dry bulb, dew point and wet bulb. No need to whirl a meter or refer to a chart for results.

- °F/°C switchable
- Data hold
- Auto power off
- · Display relative humidity and temperature simultaneously
- Response time of 60 seconds to changes in humidity

Specifications

Temperature range: -4° to 122°F (-20° to 50°C)

Resolution: 0.1°F/°C, 0.1% RH

Operating temperature range: 4° to 122°F

(-20° to 50°C) 0-100% RH

Power: 2 AAA batteries

Dimensions: 7" x 1-7/8" x 1"

(178 mm x 48 mm x 25 mm)

Weight: 2.65 oz. (75 g)

Accuracy: Relative humidity functions

(± 3% RH at 25°C)

Temperature ± 1°F (0.6°C) Sensors: Temperature: thermistor bead

Humidity: polymer film (capacitance)

Update rate: 2-6 seconds depending on function

UPC#	Description
69008	Digital psychrometer

FUEL OIL TEST KIT



Determine pump efficiency, cut-off and suction, as well as analyze or troubleshoot burner efficiency.

Kit includes 2" gauge, 30" 0-150 lb. scale and 12" hose with fittings.



UPC#	Description
78020	Complete fuel oil gauge kit
78021	2" Fuel oil gauge only
78023	Carrying case
78011	12" Hose - no valve opener
78024	Fitting set (4 pak)
78025	Adapter for 1/8" NPT
78031	2-1/2" Gauge, scale 30", 0-150 lbs.
78032	2-1/2" Gauge, scale 30", 0-300 lbs.

All gauges are 1/8" NPT.

OIL PUMP VIBRATION ELIMINATOR



Reinforced rubber hose helps eliminate noise and vibration when installed in a heating system.

- 1250 psi (86 bar) minimum burst, 250 psi (17 bar) maximum working pressure
- Operating temperature -20° to 180°F (-28.8° to 82.2°C)
- Made in the USA



UPC#	Length	Description	
78012	12"	3/8" Male flare x 1/4" NPT	
		Male oil burner connector	

ADAPTER CORD -TEST CONNECTOR

A 12" lead using number 14-3 wire and Female plug one end. Three large clips other end with red, black and green insulators. 120/240V - AC.



UPC#	Maximum amps	Clip size
69522	15 Amp	Large