

5" Diameter Stock Motors

Refrigeration – Unit Heaters – Space Heaters, GE 21/29 Frame Replacements


Mechanically Reversible

Features:

- Air Conditioners
- Base Mounting Available
- Commercial Condenser Units
- Continuous Duty, Air Over
- Designed for Easy Mechanical Reversing
- Drain Holes
- Extra Long 30" Leads
- Fits G.E. Bases
- For 1/2" Shaft Applications use Stock No. 1306 Shaft Bushing
- Holes Provided for Conduit Connector
- Refrigeration Cabinets
- Replaces Most GE 21/29 Frame Motors
- Replaces Universal Stock 401-406
- Shaded Pole
- Sleeve Bearing
- Thermally Protected
- Unit Cooler Fans & Blowers
- Unit Heaters
- 2-1/4" Mounting Rings Included
- 4 Tapped 10-32 Holes for Shaft End Mounting
- 60 Hz



**STOCK NO. 2087A
MOUNTING STUDS**
10-32 X 1"
4 per set
(available separately)

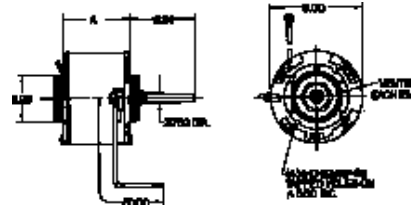

HP	RPM	Speeds	Volts	Amps	Stock No.	Shaft Dia. & Length	Rotation	"A" Dim.	Iron Stack	Conn. Dia. No.	Cross Reference	Base No.	Notes
1/20	1050	1	115/230	2.8/1.4	604	3/8 x 3-1/4	CWSE	4-1/4	3/4	21u	2321 & 2322	1207	1,2
1/15	1050	1	115/230	3.8/1.9	606	3/8 x 3-1/4	CWSE	4-1/2	1	21u	2223	2088	1,2
1/10	1050	1	115/230	4.6/2.3	608	3/8 x 3-1/4	CWSE	4-3/4	1-1/4	21u	2121 & 2122	2089	1,2
1/10	1050	1	115/230	4.6/2.3	609	3/8 x 3-1/4	CCWSE	4-3/4	1-1/4	21u	2113	2089	1,2
1/20	1550	1	115/230	2.4/1.2	610	3/8 x 3-1/4	CWSE	4-1/4	3/4	21u	2341 & 2342	1207	1,2
1/20	1550	1	115/230	2.4/1.2	611	3/8 x 3-1/4	CCWSE	4-1/4	3/4	21u	2331 & 2332	1207	1,2
1/15	1550	1	115/230	2.8/1.4	612	3/8 x 3-1/4	CWSE	4-1/2	1	21u	2241 & 2242	2088	1,2
1/15	1550	1	115/230	2.8/1.4	613	3/8 x 3-1/4	CCWSE	4-1/2	1	21u	2231 & 2232	2088	1,2
1/10	1550	1	115/230	4.4/2.2	614	3/8 x 3-1/4	CWSE	4-3/4	1-1/4	21u	2141 & 2142	2089	1,2
1/10	1550	1	115/230	4.4/2.2	615	3/8 x 3-1/4	CCWSE	4-3/4	1-1/4	21u	2131 & 2132	2089	1,2

Used on many popular commercial condensing units (Copeland, Tecumseh, Hussmann, Tyler, etc.) as well as unit cooler fans and blowers, refrigeration cabinets; also used on unit heaters, space heaters, remote air conditioners, blower units and other air moving applications. 4 ratings replace 21 of G.E.'s 21/29 frame designs.

Features:

- All angle sleeve bearings
- Auto protector
- Base and mounting clamps included
- Grommeted lead exit
- Mechanically reversible in the field
- Open enclosure
- Shaded pole
- UL and C.S.A. approved
- 3/8" shaft diameter, 1/2" adapter
- 2-1/4" rubber rings; base mounting
- 30" color coded leads
- 42 Frame (5.0" Dia.)
- 60 HZ




RF4400

HP	RPM	Voltage	Amps	Frame	Stock Number	Rotation	Conn. Dia.
1/10	1550	115/208-230	4.0/2.0	42Y	RF4400	CWSE	46
1/10	1550	115/208-230	4.0/2.0	42Y	RF4401	CCWSE	47
1/10	1050	115/208-230	4.0/2.0	42Y	RF6402	CWSE	46
1/10	1050	115/208-230	4.0/2.0	42Y	RF6403	CCWSE	47

Notes:

1. Resilient Mounting Rings Included
 2. When using U.E. Base, add (2) 1221A Adapter Rings to EACH Mounting Ring
- Also see page 33 for G.E. 11 Frame Replacements
Previous stock numbers with "X" suffix are the same as current models

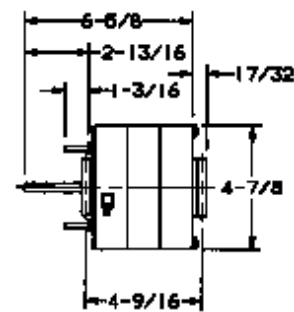

4 mounting bolts 3-1/2 dia. B.C.
(Mounting Washers and Nuts Included)