

# Submittal Data: System 36RSLX ABU36RSLX & AOU36RLX



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction

Submitted By: \_\_\_\_\_

## Capacities:

Cooling	34,100 BTU/h
Min/Max Cooling	8,500-36,000BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
Heating	36,500 BTU/h
Min/Max Heating	9,200-42,700BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	8.5
SEER	14.0
EER <i>Cooling/Heating</i>	8.1/10.4
Low Ambient Temp. <i>F° Cooling/Heating</i>	0/14
Voltage/Frequency/Phase	208-230/60/1

## Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L</i>	48/45/41
Noise Level Heating <i>db (A) - H/ M/ L</i>	48/43/39
Weight	106 lbs.

## Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	54/55
Recommended Fuse Size	30A
Min. Ampacity	23A
Running Current Cooling ( <i>Rated/Max</i> )	18.3/18.8
Running Current Heating ( <i>Rated/Max</i> )	15.6/18.8
Weight	141 lbs.

## Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	165 ft.
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

Note: Figures are based on 230 Volts

## OUTLINE AND DIMENSIONS

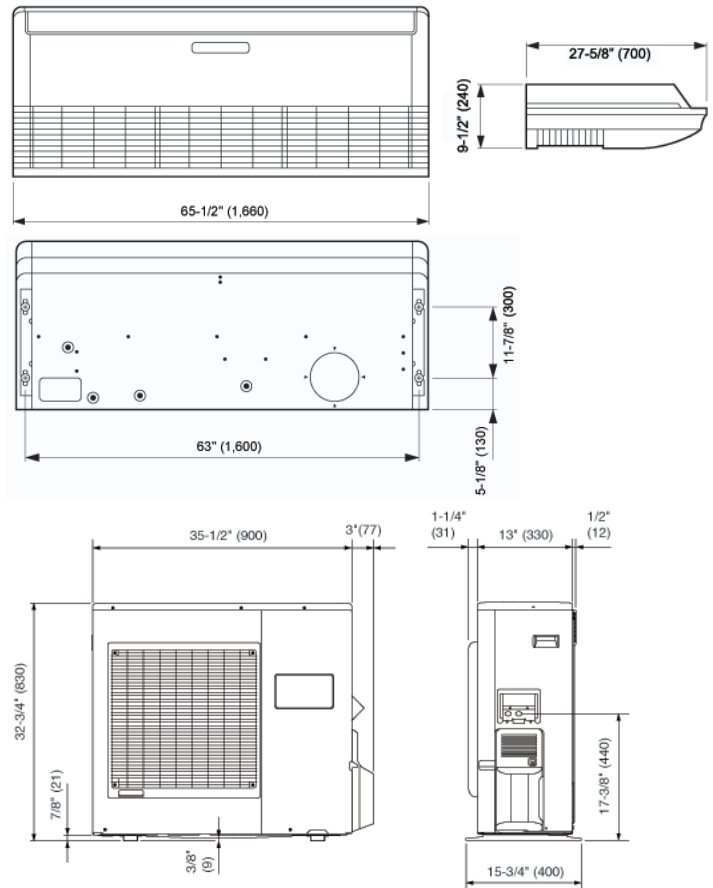

## Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Wireless Remote Control
- ◆ Auto Louver: 4 Way
- ◆ Energy saver
- ◆ Refrigerant R410A
- ◆ Optional Wired Remote
- ◆ 24 Hour Timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Auto Mode; Dry Mode
- ◆ Fresh Air Intake
- ◆ Cold Prevention
- ◆ Pump Down Operation

## Notes:

---



---



---