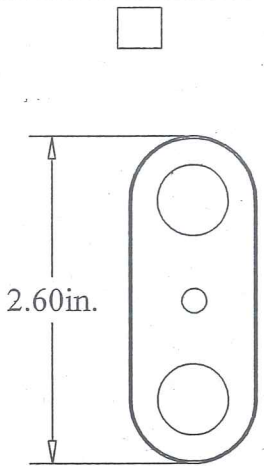
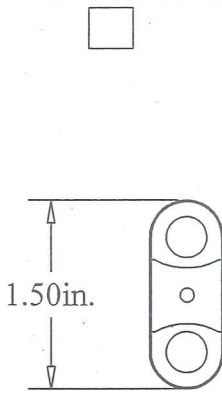
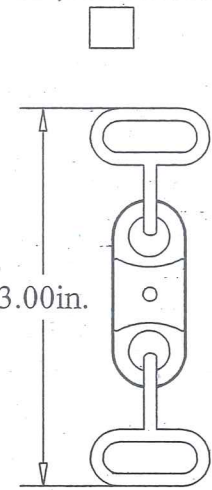
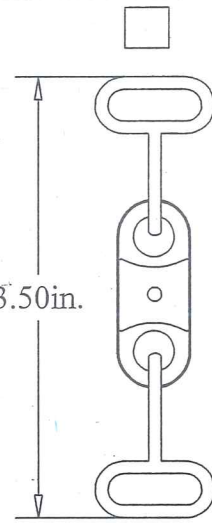
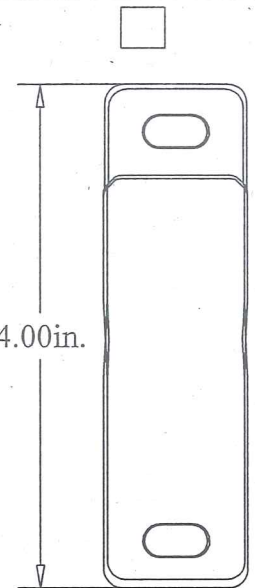
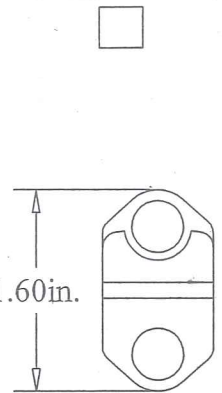


# PLEASE USE THE FOLLOWING ILLUSTRATIONS TO DIFFERENTIATE WHICH LINK IS REQUIRED

FIRST CHOOSE LINK TYPE, THEN SELECT TEMPERATURE

 <p>2.60in.</p> <p><b>Type A</b> <b>FL-A</b> 165°F &amp; 212°F ONLY</p> <p><b>Not Used Anymore</b></p>	 <p>1.50in.</p> <p><b>Type B</b> <b>No Hooks</b> <b>FL-B-NH</b> CRD50-55 4X-6X ALL BOOTS</p>	 <p>3.00in.</p> <p><b>Type B</b> <b>Short Hooks</b> <b>FL-B-SH</b> THINLINE SERIES</p>	 <p>3.50in.</p> <p><b>Type B</b> <b>Long Hooks</b> <b>FL-B-LH</b> 75 SERIES CURTAIN DAMPERS (4.25 IN)</p>	 <p>4.00in.</p> <p><b>Type C</b> 165°F &amp; 212°F ONLY</p>	 <p>1.60in.</p> <p><b>Type E</b> <b>FL-E</b> FSD AND FD111 165°F ONLY</p>
--	---	---	--	---	--

TYPE B FUSIBLE LINKS COME IN THE FOLLOWING TEMPERATURES:

- |                                |                                |
|--------------------------------|--------------------------------|
| <input type="checkbox"/> 135°F | <input type="checkbox"/> 285°F |
| <input type="checkbox"/> 165°F | <input type="checkbox"/> 375°F |
| <input type="checkbox"/> 212°F | <input type="checkbox"/> 386°F |