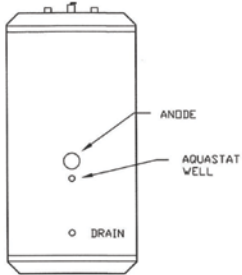
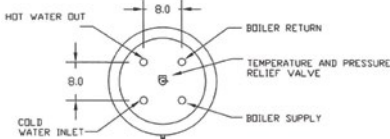



Dunkirk H₂O Stainless Steel Single Coil Indirect Water Heaters

Illustrations	Model	Storage Volume	Coil Heating Surface	Dimensions (Inches)		Piping Connections N.P.T.		Max. Tank Working Pressure	Max. Coil Working Pressure	Approx. Shipping Wgt.	
		Gallons	Square Feet	Height	Diameter	Domestic Water In/Out	Boiler Water In/Out	(psi)	(psi)	(lbs.)	
STANDARD AND HO UNITS  	H2OI30DK	30	7.3	34.0	23.5	3/4	1	150	90	85	
	H2OI40DK	40	7.7	44.0	23.5	3/4	1	150	90	100	
	H2OI40LDK	42	7.4	36.0	28.0	3/4	1	150	90	100	
	H2OI50DK	50	8.2	54.0	23.5	3/4	1	150	90	110	
	H2OI60DK	60	8.6	62.0	23.5	3/4	1	150	90	125	
	H2OI60LDK	60	7.7	46.0	28.0	3/4	1	150	90	120	
	H2OI80DK	80	8.2	56.0	28.0	1	1	150	90	140	
	H2OI115DK	115	9.1	74.0	28.0	1	1	150	90	175	
	High Output Units										
	H2OI60HODK	60	15.1	62.0	23.5	1	1	150	90	145	
	H2OI80HODK	80	14.8	56.0	28.0	1	1	150	90	155	
	H2OI80HOC DK	80	14.8	56.0	28.0	1-1/2	1-1/4	150	90	155	
	H2OI115HODK	115	15.6	74.0	28.0	1	1	150	90	190	
	H2OI115HOC DK	115	15.6	74.0	28.0	1-1/2	1-1/4	150	90	190	
	Extra High Output Units 85-XHO and 115-XHO										
H2OI85XHOC DK	87	28.7	64.0	28.0	1-1/2	1-1/2	150	90	215		
H2OI115XHOC DK	115	28.7	74.0	28.0	1-1/2	1-1/2	150	90	240		
General Information (See Installation, Operation and Maintenance Manual for complete instructions)											
Model	Max. First Hour Rating		Continuous Rating		Boiler Output Needed (BTU/Hr)	Boiler Water Flow Through Coil (Gal./Min.)	Pressure Drop Through Coil (Ft. Water)				
	Gal./Hr. @ 140° F	Gal./Hr. @ 115° F	Gal./Hr. @ 140° F	Gal./Hr. @ 115° F							
H2OI30DK	202	269	175	242	131,250	14.0	5.3				
H2OI40DK	221	292	185	256	138,670	14.0	5.7				
H2OI40LDK	212	251	176	215	132,000	14.0	5.3				
H2OI50DK	223	291	178	246	133,280	14.0	6.0				
H2OI60DK	262	342	208	288	155,700	14.0	6.2				
H2OI60LDK	239	310	185	256	138,570	14.0	5.7				
H2OI80DK	271	248	199	276	149,390	14.0	6.0				
H2OI115DK	324	409	221	306	165,750	14.0	6.6				
High Output Units 60-HO, 80-HO, and 115-HO											
H2OI60HODK	406	541	352	478	263,600	14.0	10.1				
H2OI80HODK	418	551	346	479	259,640	14.0	9.9				
H2OI80HOC DK	442	584	370	512	277,070	21.0	10.5				
H2OI115HODK	467	607	364	504	273,100	14.0	15.8				
H2OI115HOC DK	479	623	376	520	281,800	21.0	16.7				
Extra High Output Units 85-XHO and 115-XHO											
H2OI85XHOC DK	738	992	660	914	495,000	28.0	13.0				
H2OI115XHOC DK	763	1017	660	914	495,000	28.0	13.0				
Note: All ratings are based on 200° F boiler water supply and 50° F cold water inlet. See installation manual for ratings at different temperatures and flow rates. Specifications subject to change without notice.											
Standard Equipment	Smooth stainless steel coil, magnesium anode rod, factory installed stainless steel aquastat well, T & P and drain valve, welded stainless steel cold water dip tube factory installed and pressure tested, Honeywell L4080B aquastat shipped loose for field installation.										
Options	(L) Low profile models for applications with low clearances. (C) Commercial models with larger tappings for higher flow rates. (HO) High Output models available to meet greater demand. (XHO) Extra High Output models.										
Certification/Decoding	 <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <h2>H2O I 40 L DK</h2> <p>I=Indirect Capacity: 30=30 Gals. L=Lowboy C=Commercial 40=40 Gals. C=Commercial HO=High Output 50=50 Gals. HO=High Output HOC=High Output Commercial 60=60 Gals. HOC=High Output Commercial 80=80 Gals. XHO=Extra High Output 85=87 Gals. 115=115 Gals.</p> </div> <div style="text-align: center;"> <p>Conforms to UL STD 174 Certified to CAN/CSA STD C22.2 No. 110-94</p> </div> </div>										
XHOC EXTRA HIGH OUTPUT UNITS 