




Scan to see a full specifications, installation and agency certification information.

### APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

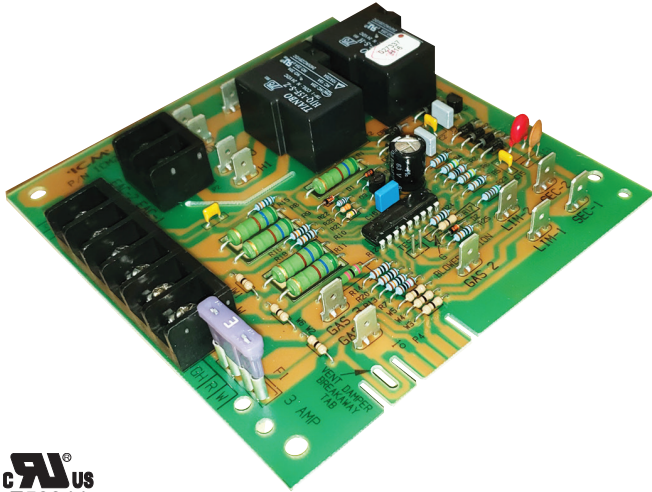

### REPLACES

- **Carrier:** 302075-3, CES0110017, CES0110018, HH84AA010, HH84AA011, HH84AA012, HH84AA013, HH84AA020, P771-7002
- **Robertshaw:** 695-100

### FEATURES

- ✓ Reliable solid state fan blower control
- ✓ Pin selectable blower delays
- ✓ High power, relay output
- ✓ Dual function fan delay timer
- ✓ Controls the circulating fan in HP, A/C and forced air systems
- ✓ OFF delay purges ducts of residual air
- ✓ ON delay allows air to reach the proper comfort level prior to energizing the fan

### SPECIFICATIONS

- **Voltage:** 18-30 VAC
- **Contact ratings:**
  - N.O.: 20 amps
  - N.C.: 10 amps
- **Time delays:**
  - Heat ON delay: 75 seconds
  - Heat OFF delay: 105 seconds
  - Cool OFF delay: 90 seconds

Content and specifications on sell sheets subject to change without notice.