


## Product Features and Specifications



Representative drawing only.  
Some models may vary in appearance.

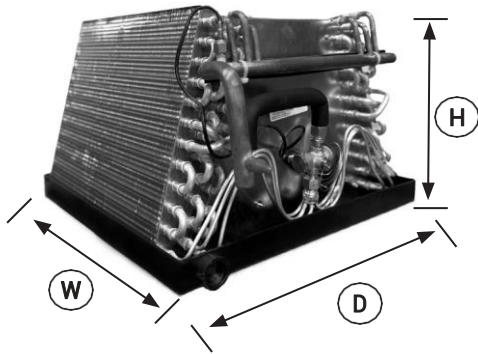

For complete warranty details  
visit [www.AspenMfg.com](http://www.AspenMfg.com)

- For use with manufactured homes furnaces
- Rifled aluminum tubing with enhanced aluminum fins
- AHRI-certifiable with all brands of air conditioners and heat pumps
- Two-step, automated leak check processing, then nitrogen-pressurized and sealed
- Factory or field-installed TXV
- Liquid line 3/8" ODS, Suction line 3/4" on 1-1/2-3 ton and 7/8" ODS on 3-1/2-5-ton
- Drain connection 177L pans have single LHG 3/4" FPT, 195L pans have quad drains, 3/4" FPT
- Left-hand refrigerant and plumbing connections
- Liquid line Schrader valve for hiss-testing
- Heavy-duty polypropylene drain pan
- Downflow plate kit available

COIL MODEL	PISTON SIZE		DIMENSIONS			SHIPPING INFORMATION		
	R-22	R-410A	PAN WIDTH (W)"	PAN DEPTH (D)"	BARE SLAB HEIGHT (H)"	SHIPPING WEIGHT (LBS)		SKID QTY
						3 ROW	4 ROW	
DM24A3*-177L	0.059	0.055	17-3/4	19-5/8	13-1/2	18	N/A	30
DM24B3*-177L	0.059	0.055	17-3/4	19-5/8	15-1/2	21	N/A	25
DM24E3*-177L	0.059	0.055	17-3/4	19-5/8	13-1/2	18	N/A	30
DM36A3*-177L	0.074	0.068	17-3/4	19-5/8	17-1/2	25	N/A	25
DM36E3*-177L	0.074	0.068	17-3/4	19-5/8	17-1/2	25	N/A	25
DM24E4*-177L	0.080	0.074	17-3/4	19-5/8	19-1/2	N/A	27	20
DM42B3*-177L	0.080	0.074	17-3/4	19-5/8	19-1/2	27	N/A	20
DM42E4*-177L	0.080	0.074	17-3/4	19-5/8	13-1/2	N/A	27	30
DM48E3*-177L	0.084	0.080	17-3/4	19-5/8	19-1/2	27	N/A	20
DM59A4*-177L/195L	0.092	0.089	17-3/4 - 19-1/2	19-1/2	19-1/2	N/A	40	20
DM60A4*-195L	0.092	0.089	19-1/2	19-1/2	27-1/2	N/A	46	12
DM60B4*-195L	0.092	0.089	19-1/2	19-1/2	27-1/2	N/A	52	12

Notes: Do not use heavy duty plastic drain pans on oil furnaces or other applications where outlet temperatures may exceed 290°F +/- 5°F. Specify metal drain pans for these applications.

\*Metering devices available - F = R22 flowrater; X = R22 TXV; 4 = R410a TXV; G = R410a flowrater

