

## SUBMITTAL DATA: MSY-GL24NA-U1 & MUY-GL24NA-U1

24,000 BTU/H WALL-MOUNTED AIR-CONDITIONING SYSTEM

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
System Designation:	Schedule No.:	



Indoor Unit: MSY-GL24NA-U1



Wireless Remote Controller



Outdoor Unit: MUY-GL24NA-U1

**ACCESSORIES:**
**Indoor Unit**

Anti-Allergy Enzyme Filter (MAC-2310FT)

**Outdoor Unit**

Windscreens (ME-FR-24)

**Controls**

Wireless Controller (MHK2)

Wired Remote Controller PAR-40MAA (Requires MAC-334IF-E)

Thermostat Interface (PAC-US444CN-1)

**Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.**

**SPECIFICATIONS:**

Rated Conditions (Capacity / Input)		
Cooling <sup>1</sup>	Btu/h / W	22,500 / 1,800

Capacity Range	Minimum	Maximum
Cooling <sup>1</sup>	Btu/h / W	8,200 / 570      31,400 / 3,580

**NOTE:** Test conditions are based on AHRI 210/240.

1: Rating conditions (Cooling) — Indoor: 80°FDB, 67°FWB, Outdoor: 95°FDB, (75°FWB)

Operating Conditions (Outdoor Intake Air Temp.) (Max. / Min.)	
Cooling <sup>2</sup>	115 F (46° C) DB / 14° F (-10° C) DB

<sup>2</sup> Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

AHRI Efficiency Ratings	
SEER [SEER2] / EER	20.5 [20.4] / 12.5

Energy Star <sup>®</sup>	Yes
--------------------------	-----

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz
-------------------------------	----------------------------

Minimum Circuit Ampacity (MCA) *		
Indoor / Outdoor (RBS)	A	1 / 17.1 (20A - Recommended Breaker Size)

**\* All electrical work shall comply with National (CEC) and local codes and regulations.**

Indoor Unit		
Blower Motor (ECM)	F.L.A.	0.76
Blower Motor Output	W	55
SHF / Moisture Removal		0.750 / 5.1 pt./h
Field Drainpipe Size O.D.	In.(mm)	5/8 (15)

Outdoor Unit		
Compressor	DC INVERTER-driven Twin Rotary	
Fan Motor (ECM)	F.L.A.	0.93

Airflow Rate (Quiet - Lo - Med - Hi - Super Hi)			
Indoor	DRY	CFM (L/sec)	388-469-544-628-738 (183-221-257-296-348)
	WET		347-420-487-562-661 (164-198-300-265-312)
Outdoor			809 / 1769 / 2016 (420 / 834 / 951)

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)			
Indoor	Cooling	dB(A)	34-41-45-49-53
Outdoor	Cooling		55

External Dimensions		
Indoor (H x W x D)	In.(mm)	12-13/16 x 43-5/16 x 9-3/8 (325 x 1,100 x 238)
Outdoor (H x W x D)		34-5/8 x 33-1/16 x 13 (880 x 840 x 330)

Net Weight		
Indoor	Lbs.(kg)	37 (17)
Outdoor		119 (54)



External Finish	
Indoor	Munsell 1.0Y 9.2 / 0.2
Outdoor	Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A; 4 lb. 3 oz.
-------------	--------------------

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	3/8 (9.52)
Gas (Low Pressure)		5/8 (15.88)
Max. Total Refrigerant Pipe Length (Height Diff.)	Ft. (m)	50 (15)
Max. Total Refrigerant Pipe Length (Length.)		100 (30)

Specifications are subject to change without notice

# DIMENSIONS: MSY-GL24NA-U1 & MUY-GL24NA-U1

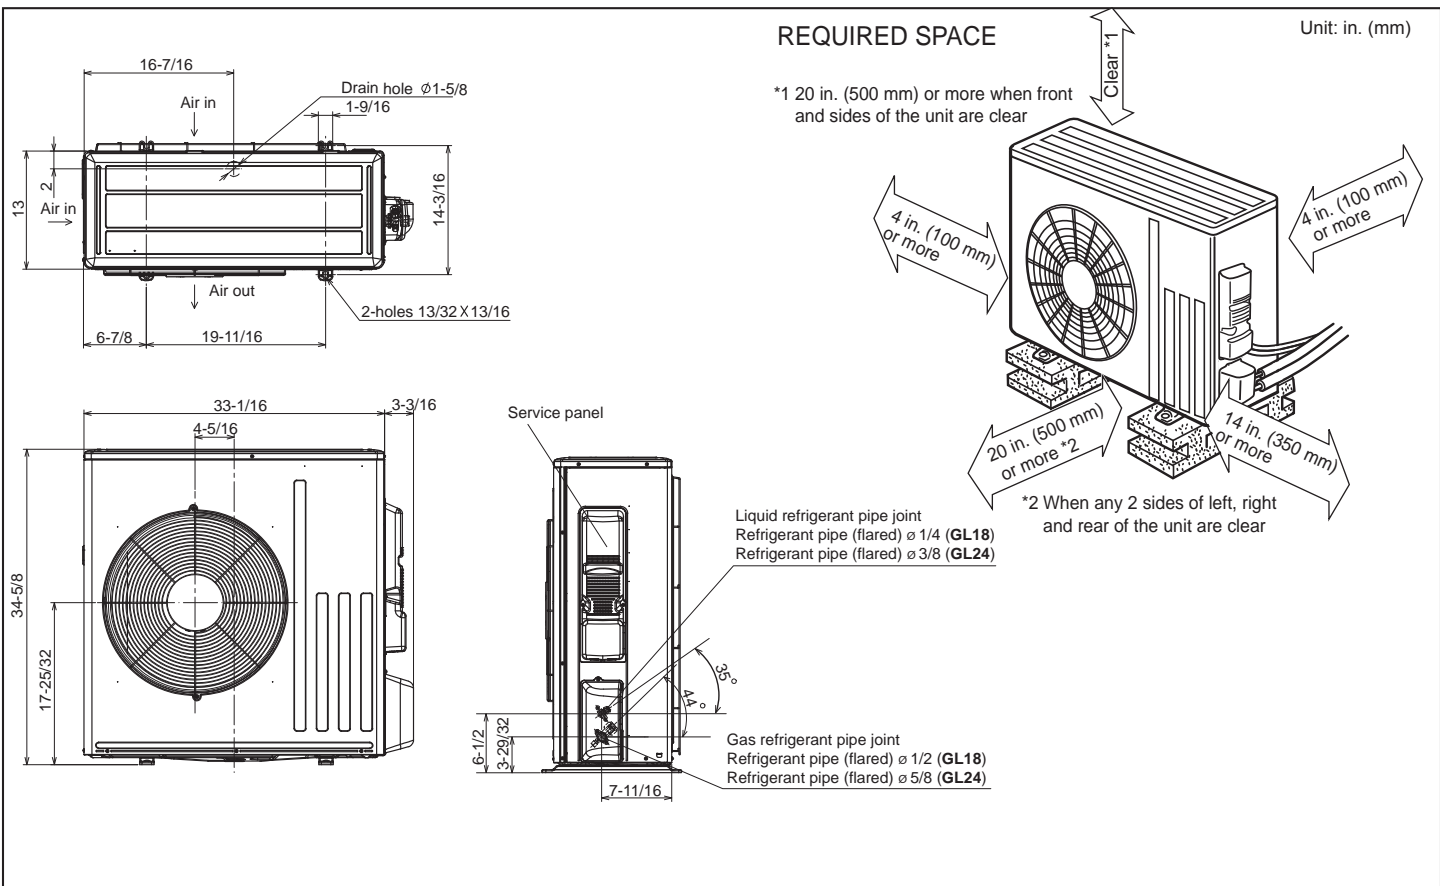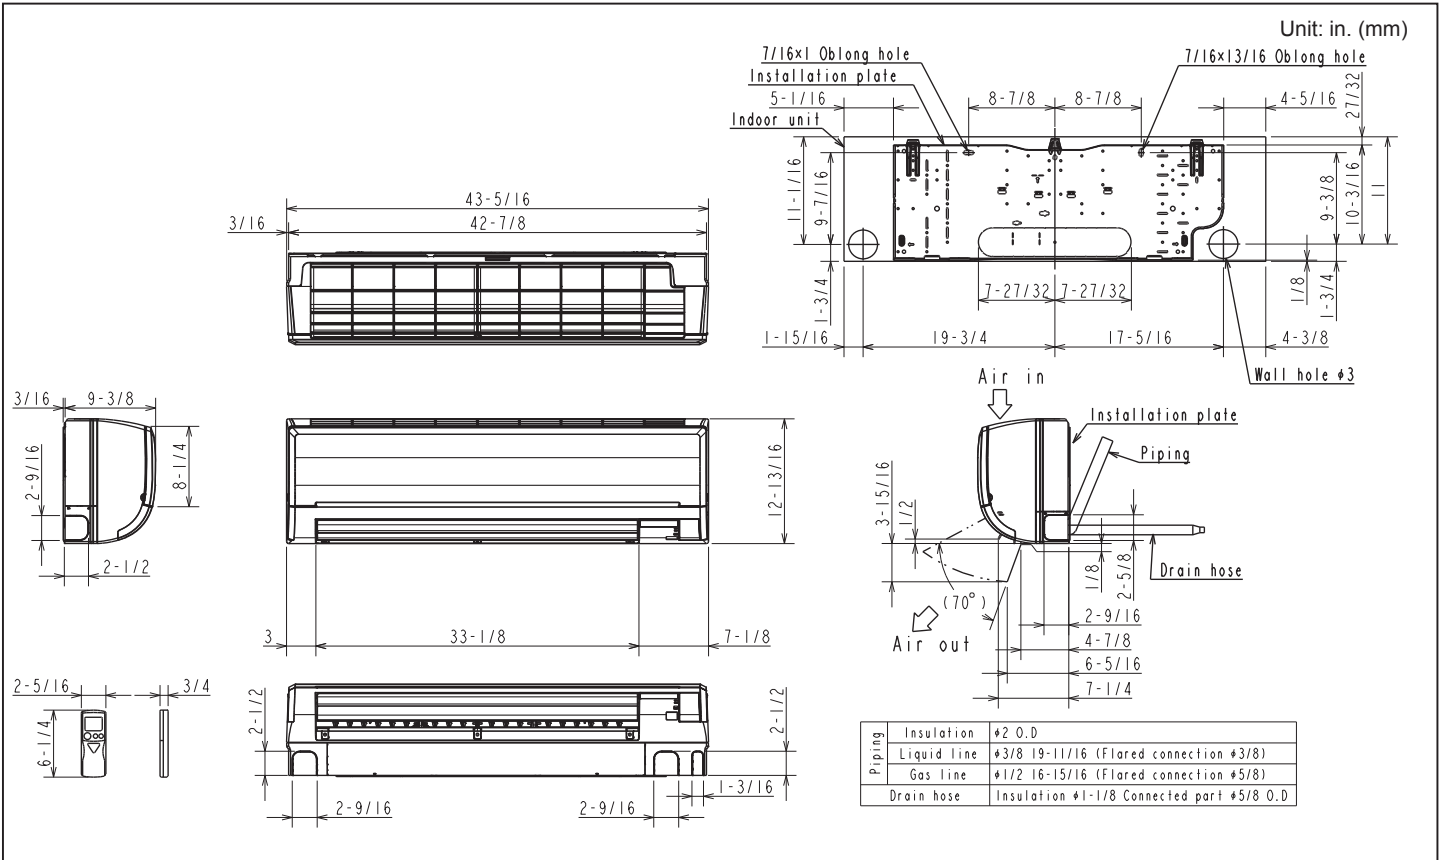

Form # SB\_MSY-GL24NA-U1\_MUY-GL24NA-U1\_202210  
 Specifications are subject to change without notice.  
 www.MitsubishiElectric.ca  
 © 2018 Mitsubishi Electric Sales Canada Inc.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.