## CONNEXT

- Ratcheting Handle
- Professional Kits
- Handles & Hex Drivers
- Individual Components



## **CONNEXT**<sup>®</sup> Ratcheting Handle and Professional Kits

Magnetic Hex Driver Kits. Whole Kits feature popular assortments of handles and magnetic hex chuck driver shafts in a tough Cordura Pouch with belt clip and Velcro closure.

#### Versatile Ratcheting Handle

A forward or reverse ratchet driving mechanism, as well as the locked driving position of the CONNEXT ratcheting handle, meets torque capacity standards (including ANSI) comparable to a 1/2-inch solid shaft driver! The clear, molded acetate, full grip is shock-proof, shatter-proof and fluted to fit any hand. The quick-connect holder mechanism accepts most 1/4 inch hex shank power drive or insert bits as a shaft, including all Malco hollow or magnetic hex chuck drivers.

#### **CONNEXT**<sup>•</sup>**4** 9 Piece Hex Hand Driver Kit:

CONNEXT 1 CONNEXT 2 CONNEXT 3 Standard Handle Stubby Handle Ratcheting Handle MSH14 • MSH516 • MSHL14 • MSHL516 • MSHXL14 • MSHXL516



#### CONNEXT 5 12 Piece Hex Hand Driver Kit:

CONNEXT1 Standard Handle Stubby Handle Ratcheting Handle MSH1/4 • MSH5/16 • MSH3/8 • MSHL1/4 • MSHL5/16 • MSHL3/8 • MSHXL1/4 • MSHXL5/16 • MSHXL3/8



#### **CONNEXT® TOOLS / DRIVERS**



#### **Individual Hex Drivers**



Malco Tool Book • Annandale, Minnesota

Stubby Handle

#### **CONNEXT® TOOLS / DRIVERS**

#### **Specifications**

#### **CONNEXT®** Magnetic Stubby Length Hex Hand Drivers

Catalog		Color		Hex Opening	Insert Dia.	Nose Dia.	Holder Dia.	Shaft Total	Overall Length	Shaft
Number	Description	Coded	Reaction	in. (mm)	in. (mm)	in. (mm)	in. (mm)	Lgth. in. (mm)	in. (cm)	Replacement #
HHD1T	CONNEXT <sup>°</sup> Stubby Hex Hand Driver		Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	11/16 (17.4625)	2-1/4 (57.15)	4-1/8 (104.775)	MSH14
HHD2T	CONNEXT <sup>®</sup> Stubby Hex Hand Driver	0	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	11/16 (17.4625)	2-1/4 (57.15)	4-1/8 (104.775)	MSH516
HHD3T	CONNEXT <sup>°</sup> Stubby Hex Hand Driver		Magnetic	3/8	1/4 (6.35)	9/16 (14.2875)	11/16 (17.4625)	2-1/4 (57.15)	4-1/8 (104.775)	MSH38

#### **CONNEXT<sup>®</sup> Standard Magnetic Hex Hand Drivers**

Catalog		Color		Hex Opening	Insert Dia.	Nose Dia.	Holder Dia.	Shaft Total	Overall Length	Shaft
Number	Description	Coded	Reaction	in. (mm)	in. (mm)	in. (mm)	in. (mm)	Lgth. in. (mm)	in. (mm)	Replacement #
HHD1S	CONNEXT <sup>°</sup> Standard Lgth. Hex Hand Driver	•	Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	11/16 (17.4625)	3 (76.2)	7-1/8 (180.975)	MSHL14
HHD2S	CONNEXT <sup>°</sup> Standard Lgth. Hex Hand Driver	$\bigcirc$	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	11/16 (17.4625)	3 (76.2)	7-1/8 (180.975)	MSHL516
HHD3S	CONNEXT <sup>®</sup> Standard Lgth. Hex Hand Driver	•	Magnetic	3/8	1/4 (6.35)	9/16 (14.2875)	11/16 (17.4625)	3 (76.2)	7-1/8 (180.975)	MSHL38

#### **CONNEXT® Long Magnetic Hex Hand Drivers**

Catalog		Color		Hex Opening	Insert Dia.	Nose Dia.	Holder Dia.	Shaft Total	Overall Length	Shaft
Number	Description	Coded	Reaction	in.	in. (mm)	in. (mm)	in. (mm)	Lgth. in. (mm)	in. (mm)	Replacement #
HHD1	CONNEXT <sup>®</sup> Long Hex Hand Driver	•	Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	11/16 (17.4625)	6-7/8 (174.625)	10-1/2 (266.7)	MSHXL14
HHD2	CONNEXT <sup>®</sup> Long Hex Hand Driver	0	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	11/16 (17.4625)	6-7/8 (174.625)	10-1/2 (266.7)	MSHXL516
HHD3	CONNEXT <sup>®</sup> Long Hex Hand Driver		Magnetic	3/8	1/4 (6.35)	9/16 (14.2875)	11/16 (17.4625)	6-7/8 (174.625)	10-1/2 (266.7)	MSHXL38

#### Short Magnetic Hex Drivers

	-								
Catalog		Color		Hex Opening	Insert Dia.	Nose Dia.	Overall Length	Distributor	
Number	Description	Coded	Reaction	in.	in. (mm)	in. (mm)	in. (mm)	Buy Qty.	2 Pack
MSH14	Short Magnetic Hex Driver	٠	Magnetic	1/4	1/4 (6.365)	7/16 (11.1125)	1-3/4 (44.45)	10	MSH14P
MSH14T	Short Magnetic Hex Driver (TUB of 100)		Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	1-3/4 (44.45)	100	
MSH516	Short Magnetic Hex Driver	$\bigcirc$	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	1-3/4 (44.45)	10	MSH516P
MSH516T	Short Magnetic Hex Driver (TUB of 100)	0	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	1-3/4 (44.45)	100	
MSH38	Short Magnetic Hex Driver		Magnetic	3/8	1/4 (6.35)	9/16 (14.2875)	1-3/4 (44.45)	10	MSH38P

#### Long Magnetic Hex Drivers

Catalog		Color		Hex Opening	Insert Dia.	Nose Dia.	Overall Length	Distributor	
Number	Description	Coded	Reaction	in.	in. (mm)	in. (mm)	in. (mm)	Buy Qty.	2 Pack
MSHL14	Long Magnetic Hex Driver		Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	2-9/16 (65.0875)	5	MSHL14P
MSHL14T	Long Magnetic Hex Driver (TUB of 50)		Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	2-9/16 (65.0875)	50	
MSHL516	Long Magnetic Hex Driver	0	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	2-9/16 (65.0875)	5	MSHL516P
MSHL516T	Long Magnetic Hex Driver (TUB of 50)	$\bigcirc$	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	2-9/16 (65.0875)	50	
MSHL38	Long Magnetic Hex Driver		Magnetic	3/8	1/4 (6.35)	9/16 (14.2875)	2-9/16 (65.0875)	5	MSHL38P
MSHL716	Long Magnetic Hex Driver		Magnetic	7/16	1/4 (6.35)	11/16 (17.4625)	2-9/16 (65.0875)	5	MSHL716P

#### Extra Long Magnetic Hex Drivers

Catalog Number	Description	Color Coded	Reaction	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Overall Length in. (mm)	Distributor Buy Qty.
MSHML14	Extra Long Magnetic Hex Driver	•	Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	4 (101.6)	1
MSHXL14	Extra Long Magnetic Hex Driver		Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	6 (152.4)	1
MSHXL14T	Extra Long Magnetic Hex Driver (TUB of 50)	•	Magnetic	1/4	1/4 (6.35)	7/16 (11.1125)	6 (152.4)	50
MSHML516	Extra Long Magnetic Hex Driver	$\bigcirc$	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	4 (101.6)	1
MSHXL516	Extra Long Magnetic Hex Driver	$\bigcirc$	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	6 (152.4)	1
MSHXL516T	Extra Long Magnetic Hex Driver (TUB of 50)	0	Magnetic	5/16	1/4 (6.35)	1/2 (12.7)	6 (152.4)	50
MSHXL38	Extra Long Magnetic Hex Driver		Magnetic	3/8	1/4 (6.35)	9/16 (14.2875)	6 (152.4)	1

#### CONNEXT<sup>®</sup> Quick-Change Handles

Catalog		Grip Dia.	Grip Lgth.	Holder Opening	Holder Dia.	Holder Lgth.	Overall Length
Number	Description	in. (mm)	in. (mm)	in.	in. (mm)	in. (mm)	in. (mm)
CONNEXT1	Quick-Change Standard Handle	1-1/8 (28.575)	4-1/8 (104.775)	1/4	11/16 (17.4625)	1-1/8 (28.575)	5-1/4 (133.35)
CONNEXT2	Quick-Change Stubby Handle	1-1/8 (28.575)	1-7/8 (47.625)	1/4	11/16 (17.4625)	1-1/8 (28.575)	3-1/8 (79.375)

CONNE	CONNEXT <sup>®</sup> Quick-Change Ratcheting Handle										
Catalog				Grip Dia.	Grip Length	Holder I.D.	Holder O.D.	Holder Length	Overall Length		
Number	Description	Driving Positions	Torque Capacity	in. (mm)	in. (mm)	in.	in. (mm)	in. (mm)	in. (mm)		
CONNEXT3	Ratcheting Style Handle Long	Forward, Reverse, Locked	Comp. 1/2 solid shaft	1-1/8 (28.575)	4-1/8 (104.775)	1/4 Hex	5/8 (15.875)	1-5/8 (41.275)	6-3/8 (161.925)		


# COBHUH

### **IMPACT-GRADE HEX CHUCK DRIVERS**

Impact Stress Resistant • Precise Machining for Fail-Proof Fastener Engagement



#### **IMPACT GRADE DRIVERS**

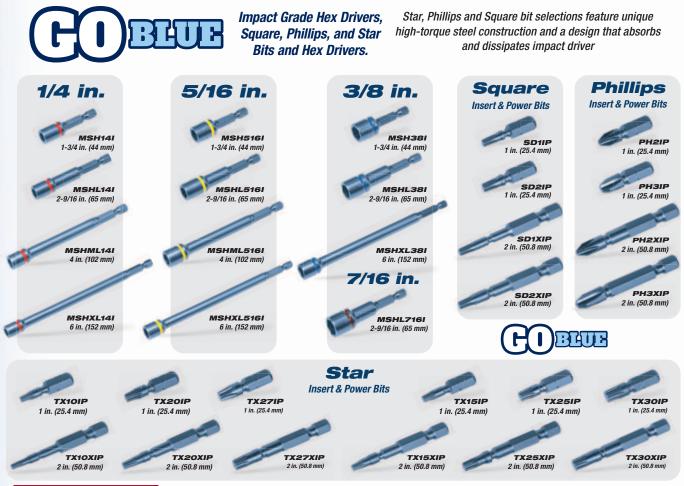

#### Specifications

Catalog Number	Description	Point Size	HEX Insert in. (mm)	OA Length in. (mm)	Qty.	Catalog Number	Description	Color Coded	Hex Opening in.	HEX Insert in. (mm)	Reaction	Nose Diameter in. (mm)	OA Length in. (mm)	Qty.
Square	Insert Bits					Short N	lagnetic Hex Drivers							
SD1IP	Square Insert Bit	#1	1/4 (6.35)	1 (25.4)	3	MSH14I	Short Magnetic Hex Driver	•	1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2 (50.8)	10
SD2IP	Square Insert Bit	#2	1/4 (6.35)	1 (25.4)	3	MSH14IS	Short Magnetic Hex Driver	•	1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2 (50.8)	1
Square	Power Bits					MSH14IT	Short Magnetic Hex Driver	•	1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2 (50.8)	100
SD1XIP	Square Power Bit	#1	1/4 (6.35)	2 (50.8)	3	MSH516I	Short Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2 (50.8)	10
SD2XIP	Square Power Bit	#2	1/4 (6.35)	2 (50.8)	3	MSH516IS	Short Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2 (50.8)	1
Phillips	Insert Bits					MSH516IT	Short Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2 (50.8)	100
PH2IP	Phillips Insert Bit	#2	1/4 (6.35)	1 (25.4)	3	MSH38I	Short Magnetic Hex Driver		3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2 (50.8)	10
PH3IP	Phillips Insert Bit	#3	1/4 (6.35)	1 (25.4)	3	MSH38IS	Short Magnetic Hex Driver		3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2 (50.8)	1
Phillips	Power Bits					Long M	agnetic Hex Drivers							
PH2XIP	Phillips Power Bit	#2	1/4 (6.35)	2 (50.8)	3	MSHL14IS	Long Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2-9/16 (65.1)	1
PH3XIP	Phillips Power Bit	#3	1/4 (6.35)	2 (50.8)	3	MSHL14IT	Long Magnetic Hex Driver		1/4	1/4 (6).35	Magnetic	7/16 (11.1125)	2-9/16 (65.1)	50
Star Ins	sert Bits					MSHL516I	Long Magnetic Hex Driver	$\bigcirc$	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2-9/16 (65.1)	10
TX10IP	Star Insert Bit	T10	1/4 (6.35)	1 (25.4)	3	MSHL516IS	Long Magnetic Hex Driver	$\bigcirc$	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2-9/16 (65.1)	1
TX15IP	Star Insert Bit	T15	1/4 (6.35)	1 (25.4)	3	MSHL516IT	Long Magnetic Hex Driver	$\bigcirc$	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2-9/16 (65.1)	50
TX20IP	Star Insert Bit	T20	1/4 (6.35)	1 (25.4)	3	MSHL38I	Long Magnetic Hex Driver		3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2-9/16 (65.1)	10
TX25IP	Star Insert Bit	T25	1/4 (6.35)	1 (25.4)	3	MSHL38IS	Long Magnetic Hex Driver		3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2-9/16 (65.1)	1
TX27IP	Star Insert Bit	T27	1/4 (6).35	1 (25.4)	3	MSHL716I	Long Magnetic Hex Driver		7/16	1/4 (6.35)	Magnetic	11/16 (17.4625)	2-9/16 (65.1)	10
TX30IP	Star Insert Bit	Т30	1/4 (6.35)	1 (25.4)	3	MSHL716IS	Long Magnetic Hex Driver		7/16	1/4 (6.35)	Magnetic	11/16 (17.4625)	2-9/16 (65.1)	1
Star Po	ower Bits													
TX10XIP	Star Power Bit	T10	1/4 (6.35)	2 (50.8)	3	Extra L	ong Magnetic Hex Dr	ivers						
TX15XIP	Star Power Bit	T15	1/4 (6.35)	2 (50.8)	3	MSHML14IS	Extra Long Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	4 (101.6)	1
TX20XIP	Star Power Bit	T20	1/4 (6.35)	2 (50.8)	3	MSHXL14IS	Extra Long Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	6 (152.4)	1
TX25XIP	Star Power Bit	T25	1/4 (6.35)	2 (50.8)	3	MSHXL14IT	Extra Long Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	6 (152.4)	50
TX27XIP	Star Power Bit	T27	1/4 (6.35)	2 (50.8)	3	MSHML516IS	Extra Long Magnetic Hex Driver	$\bigcirc$	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	4 (101.6)	1
TX30XIP	Star Power Bit	T20	1/4 (6.35)	2 (50.8)	3	MSHXL516IS	Extra Long Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	9/16 (14.2875)	6 (152.4)	1

in. = inches, 0A = Overall

in. = inches, 0A = 0verall

1/4 (6.35) Magnetic 9/16 (14.2875) 6 (152.4)

1/4 (6.35) Magnetic 9/16 (14.2875) 6 (152.4)

5/16

3/8

0

MSHXL516IT Extra Long Magnetic Hex Driver

MSHXL38IS Extra Long Magnetic Hex Driver

50

1

#### **DRIVERS / EXTENSION BITS**



#### **Specifications**

Robertson<sup>®</sup> Style Square Head Hex Bits

• Fully hardened • Square tip will not cam out

• #1 and #2 drivers available in 1-3/4 in. and 2-1/2 in. lengths

Catalog Number	Description	Point Size	Color	Insert Dia. in. (mm)	Overall Length in. (mm)	Qty.
SD1	Square Head Hex Bit	#1	ightarrow	1/4	1-3/4 (44.45)	10
SD1P	Square Head Hex Bit	#1	•	1/4	1-3/4 (44.45)	2
SD2	Square Head Hex Driver	#2	•	1/4	1-3/4 (44.45)	10
SD2P	Square Head Hex Driver	#2	•	1/4	1-3/4 (44.45)	2
SDX1	Square Head Hex Driver	#1	ightarrow	1/4	2-1/2 (63.5)	10
SDX1P	Square Head Hex Driver	#1	•	1/4	2-1/2 (63.5)	2
SDX2	Square Head Hex Driver	#2	•	1/4	2-1/2 (63.5)	10
SDX2P	Square Head Hex Driver	#2	•	1/4	2-1/2 (63.5)	2
1/4 in	. Hex Shank Phillips	Bits				
MBSP2	Hex Shank Phillips Insert Bit	#2	—	1/4	1 (24.5)	
MBLP2	Hex Shank Phillips Driver	#3	_	1/4	1-15/16 (49.21)	
MBLP3	Hex Shank Phillips Driver	#2	_	1/4	1-15/16 (49.21)	
MBLP4	Hex Shank Phillips Driver	#2	_	1/4	2-3/4 (69.85)	



## **One-Handed Quick Release!**

#### A Fast and Easy Push-in Style Receiver,

with 3 Ball Bearing Detents holds any 1/4 -inch hex shank power groove or insert bit securely. Retract the collar only when removing bit.

#### Impact Grade Steel Construction

make these durable extensions versatile for use with any Impact Driver or Malco CONNEXT® Handle!





1/4-inch hex shank designed for any hex shank insert bit. Extends the length of reach a full 3 inches.



#### **Specifications**

Magnetic Bit Holder											
Catalog Number	Description	Hex Opening in.	Shank Dia. in.	Nose Dia. in. (mm)	Overall Length in. (mm)						
MBH14	Magnetic Bit Holder	1/4	1/4	7/16 (11.1125)	3 (76.2)						