LUXPRO®

PSPLV512
programmable

Easy, heat only thermostat

5/2-day Programmable
Programmable • Non-Programmable

Product Highlights

- ✓ Requires 2-AA batteries
- ✓ Pre-programed settings
- ✓ 5 year warranty

Product Features

- Easy installation
- Programmable 5/2-day
- Easy-view back light
- Optional wall plate model# WP510
- Positive on/off switch
- Requires (2AA) Alkaline Batteries (included)
- UL approved
- Display option: fahrenheit or celsius temperature
- Vacation hold
- Temporary temperature override

Installation

Compatible With
- 1 stage heat only; single or double pole 120/240 VAC systems
- Line voltage (120/240V)
- Hydronic (hot water) systems with motors up to 1/4 HP
- 120V (1,800W resistive)/240V (3,600W resistive) line voltage systems (without transformer)
- Max 15 amps

Not Compatible With
- Conventional 24 V heating and cooling systems

4747 South Broad Street | Building 101 – Suite 330 | Philadelphia, PA 19112 | P: 856.234.7905 | F: 856.234.7825

LUXPRO®
LuxProProducts.com

SPECIFICATIONS

MODEL# **PSPLV512**

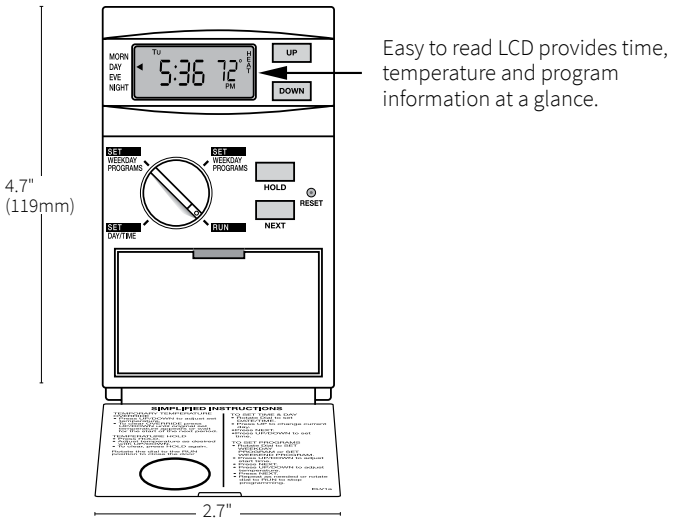

Easy to read LCD provides time, temperature and program information at a glance.

Dimensions	2.7" (69mm) wide x 4.7" (119mm) tall x 2.4" (61mm) deep
Compatibile With	▪ 1 stage heat only; single or double pole 120/240 VAC systems ▪ Line voltage (120/240V) ▪ Hydronic (hot water) systems with motors up to 1/4 HP ▪ 120V (1,800W resistive)/240V (3,600W resistive) line voltage systems (without transformer) ▪ Max 15 amps
Not Compatibile With	▪ Conventional 24 V heating and cooling systems
Packaging	▪ Master Carton: Master Carton: 5 units ▪ UPC: 0 21079 06512 7

IMPORTANT: If not installed properly, this unit could cause a fire. For applications such as baseboard electric heat (resistive), the max load is 15 Amps, from 20 Amp circuit breaker. For heat applications such as a hot water circulating pump (inductive), the maximum load is 1/4 HP @ 120Volts (this thermostat is not compatible with heating appliances which contain both an electric heating element (resistive) and a blower fan (inductive load) within the same device. This product should be installed by a licensed electrician.

Project Name

Date

Contractor / Engineer

Location

LUXPRO®
LuxProProducts.com
4747 South Broad Street | Building 101 – Suite 330 | Philadelphia, PA 19112 | P: 856.234.7905 | F: 856.234.7825