


Low Water Cut-Offs – Electronic For Hot Water Boilers

RB-24



Low Water Cut-Offs

- For residential applications
- Compact size
- Easy to install and wire
- Automatic reset feature resumes operation after a power outage when water is on probe
- Green power on indicating LED
- Red low water indicating LED
- Solid state operation
- 15,000 ohms probe sensitivity
- Maximum ambient temperature 120°F (49°C)
- Maximum water temperature 250°F (121°C)
- Maximum water pressure 50 psi (3.5 kg/cm²)
- 3 ft. harness cable included

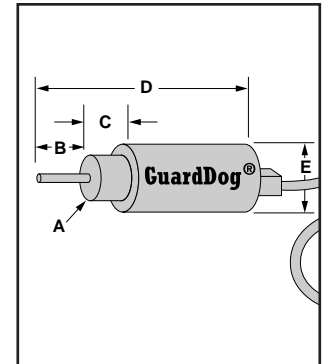

Electrical Ratings

Voltage	Power Consumption	Load Switching
24 VAC	2.5 VA	2 A at 24 VAC

Note:
A 15 mA minimum current draw is required.

Dimensions, in. (mm)

A	B	C	D	E
NPT				
3/4	3/4 (19)	3/4 (19)	3 (76)	1 3/4 (19)

Ordering Information

Model Number	Part Number	Description	Weight lbs. (kg)
RB-24	144685	Residential low water cut-off	.7 (.32)