




SFPC FREEZE PROTECTION CONTROL STYLE 37TV32



- Protects Air Conditioning Evaporator Coil from Freezing
- Opens 35°F/Close 50°F
- Fits 7/8" O.D. Tubing
- Replaces: Trol-A-Temp FPC
- Includes Clip to Fit 7/8" O.D. Tubing
- 350°F Max Ambient Temperature


Voltage (VAC)	Motor Rating (Inductive)			
	Resistive Amps	Full Load	Locked Rotor	Pilot Duty
120	10	5.8	34.8	125VA
240	5	2.9	17.4	125VA

THERMAL CUT OUTS

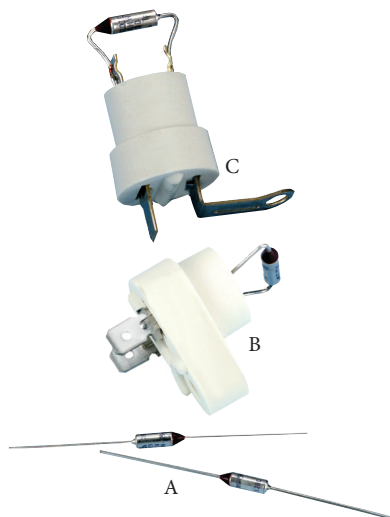

Part No. 15 Amp Series 1	Part No. 25 Amp Series 2	Open Temp °C	Open Temp °F	Style	Part No. 15 Amp Series 1	Part No. 25 Amp Series 2	Open Temp °C	Open Temp °F	Style
	STC8170	77	170	A	STC4358		184	363	A
STC4228		109	228	A	STC4438		226	438	A
	STC8242	117	242	A	STC4468		242	468	A
STC4257		125	257	A	STC5257		125	257	B
STC4283	STC8283	139	283	A	STC5300		149	300	B
STC4300		149	300	A	STC5333		167	333	B
STC4333		167	333	A	STC5377		192	377	B
					STC6257		125	257	C
					STC86283		139	283	C
					STC6300		149	300	C
					STC6333		167	333	C
					STC86377		192	377	C

Series 1 Maximum Wattage 1800W @ 120V/2400W @ 240
 Series 2 Maximum Wattage 1800W @ 120V/6000W @ 240



Part No.	Terminals	°C	°F	Style
STF4170	QC. 1/4"	77	170	36T
STF4230	QC. 1/4"	110	230	36T
STF4291B	QC. 3/16"	144	291	36T

Maximum Wattage 1800W @ 120V/2400W @ 240



Part No.	Description	Where Used
T1121	2 to 1 Terminal Adapter	1/4" QC Female to 2 Male 1/4" QC Chair Terminal
T1122	2 to 1 Terminal Adapter	1/4" QC Female to 2 Male 1/4" QC Side by Side Terminal
T1123	Screw to Terminal Adapter	8 - 10 Stud to 1/4" QC Terminal
T1124	Terminal to Screw Adapter	1/4" QC Female to Screw Right Angle Terminal
T1125	2 to 1 Terminal Adapter	1/4" QC Female to 1/4" QC Male Piggyback Terminal