

Industrial
Product
Catalog

Shurtape

INDUSTRIAL

The Right Solution for Every Job.

That's what we have dedicated to crafting — and supplying — to you. Because our privately owned, fifth generation, global corporation is committed to designing, developing, manufacturing and delivering product solutions that make our customers' lives easier and help them do their jobs better.

Through our industry-leading Industrial Group, based in Hickory, NC, we deliver pressure-sensitive tapes for those with the highest, most exacting standards, and proudly serve a variety of markets, including industrial packaging, building and construction, professional paint, HVAC, industrial MRO, arts and entertainment and transportation.

No matter the job, we know it's critical you're prepared. That's why we continue to deliver the tapes you trust — and the product features you demand — to deliver superior results.

Shurtape
TECHNOLOGIES

In continuous operation since 1880, our company has a history of entrepreneurship and innovation, from spinning cotton, yarn and twine to our focus today: on making high-quality, high-performing tapes. Our success is built on passion — for our products, for complete customer satisfaction and for the markets we serve. Here are just a few things we bring to the table:

Industry Knowledge

We have developed resources dedicated to keeping you up to date on industry trends and best practices — to help you exceed expectations on the job. Our educational website, *TapeUniversity.com*, is your leading online resource for all things tape. We are committed to building the best learning experience by providing the tape industry's most comprehensive place to learn about the past, present and future trends on choosing and using tape. From blog posts and articles to video demonstrations, Tape University serves to answer the industry's most commonly asked questions about tape — and invites you to ask your own.

Product Innovation

We don't back down from a challenge. In fact, we embrace it. We listen. We solve. We develop the tools you need to get the job done right...the first time.

Global Footprint

Our global manufacturing, distribution and service capabilities position us to satisfy the growing needs of an international audience searching for competitively priced, high-quality tape solutions, with international locations in:



Mexico | Peru | The United Kingdom | Germany | United Arab Emirates | China | Australasia | Denmark

Want to learn more about our company, locations and brands?
Visit us online at ShurtapeTech.com.

MASKING & PAPER TAPES 2

- FrogTape® Painter's Tapes 4
- Painter's Tapes 5
- General Purpose Masking Tapes 7
- FrogTape® Performance Masking Tapes 8
- Performance Masking Tapes 9
- Flatback Paper Tapes 10
- Specialty Tapes 11

PACKAGING SOLUTIONS 12

- Hot Melt Tapes 14
- Specialty Hot Melt Tapes 15
- Printed Hot Melt Tapes 16
- Printable Hot Melt Tapes 16
- Water-Based Acrylic Tapes 17
- Water Activated Tapes 18
- Strapping Tapes 19
- Solvent-Based Acrylic Tapes 20
- Office & Specialty Tapes 21
- ShurSEAL® Packaging Solutions 22
- Tape Applicators 23
- Packaging Machines 24
- Manual Applicators 26
- Hot Melt Glues 26
- Automated Applicator 29

CLOTH & DUCT TAPES 30

- Duck Pro® by Shurtape® Tapes 32
- BR Code™ Scannable Labels 36
- General Purpose Duct Tapes 38
- Stucco Duct Tapes 39
- HVAC Duct Tapes 40
- Heavy Duty Duct Tapes 41
- Specialty Duct Tapes 41
- Coated Cloth Tapes 42
- Specialty Tape 43
- T-Rex® Tapes 44
- T-Rex® Specialty Tapes 46

FOIL, FILM & FOAM TAPES 48

- Aluminum Foil Tapes 50
- Electrical Tapes 52
- Polyethylene/PVC Film Tapes 53
- Specialty Tapes 54
- Composite Tapes 55

DOUBLE-COATED TAPES 56

- Double-Coated Paper Tapes 58
- Double-Coated Film Tapes 59
- Double-Coated Foam Tapes 59
- Double-Coated Cloth Tapes 60
- Transfer Adhesive Tapes 60
- Dispenser 60

INDUSTRIAL INNOVATIONS 61

APPLICABLE STANDARDS 62

WARRANTY INFORMATION 62

PRODUCT INDEX 63



We are proud to craft — and supply — the right tape solution for every job. And we are proud to manufacture many of those tapes right here in the USA. Look for this icon for items that are Made in the USA with Local & Global Materials.

SHURTAPE INDUSTRIAL SOLUTIONS

Shurtape Industrial is your trusted supplier of HVAC tape, heavy-duty duct tape, packaging tape and more.

Available under market-leading brands and crafted with a spirit of passion, inspiration and innovation, our tapes and solutions are purpose-built to meet — and exceed — the standards of the markets we serve. **No matter the application, Shurtape Industrial products get the job done.**



Shurtape® brand proudly serves a variety of professional and industrial markets with a comprehensive product portfolio that includes masking and paper, foil and film, packaging, double-coated, cloth and duct, and other specialty tape products, in addition to packaging dispensers and equipment for automated and manual packaging applications.



We make it our business to know what contractors need. So, we know you need to save time and get the job done right, the first time. Since 1955, we've strived to be a leader in all things tape and that's why we're bringing you Duck Pro® by Shurtape® — the brands you know with the quality and performance you trust. With tapes that are as versatile as they are durable, we've got you covered no matter what the job demands.



FrogTape® offers premium-quality painting tapes that ensure professional results for any painting project. The brand's Multi-Surface, Delicate Surface and Pro Grade Blue formulations feature PaintBlock® Technology, a super-absorbent polymer that seals the edges of the tape to keep paint out and lines sharp. When performance cannot be compromised, FrogTape® delivers professional results you can trust — when it matters most.



T-Rex® products use modern, next-generation technology to produce top-quality tapes that perform well in all conditions — helping everyone from DIYers and professionals to extreme sports and outdoorsmen get the job done.

MASKING & PAPER TAPES

We know your time is valuable.

That's why our masking and paper tapes are engineered to meet the demands of a range of jobs.

Whether you require tensile strength, temperature resistance, removability, flexibility or professional paint lines,

Shurtape delivers.

Shurtape[®]
TRUE TO YOUR WORK


FROGTAPE

Test Before Use: Masking and paper tapes should be tested for compatibility with paints, coatings and surfaces prior to application.

FROGTAPE® PAINTER'S TAPES

CF 120 FrogTape®



**MULTI-SURFACE
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE
PAINTBLOCK® TECHNOLOGY**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	5.3
ELONGATION (%)	10
APPLICABLE STANDARDS*	16

For interior or exterior use on multiple surfaces, including cured painted walls, wood trim, glass and metal; Withstands direct sunlight for up to 7 days.



CP 130 FrogTape®



**PRO GRADE
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE
PAINTBLOCK® TECHNOLOGY**

TENSILE (LBS/IN WIDTH)	22.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32.5
THICKNESS (MILS)	5.08
ELONGATION (%)	10
APPLICABLE STANDARDS*	-

For interior or exterior use on multiple surfaces, including cured painted walls, wood trim, glass and metal.



CF 160 FrogTape®



**DELICATE SURFACE
LOW ADHESION
ACRYLIC-BASED ADHESIVE
PAINTBLOCK® TECHNOLOGY**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	14
THICKNESS (MILS)	3.6
ELONGATION (%)	4.5
APPLICABLE STANDARDS*	-

For interior use on freshly painted surfaces (24 hours old), faux finishes, primed wallboard and coated wallpaper.



CP 199 FrogTape®



**PRO GRADE ORANGE™
HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE
STICKS BETTER THAN BEIGE®**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.4
ELONGATION (%)	9
APPLICABLE STANDARDS*	-

For interior or exterior use on a variety of surfaces even in hot and humid conditions; For masking light fixtures, doorways and windows, or hanging poly for protection while spraying; Easy to apply and removes cleanly without shredding for up to 3 days.



Does not contain PaintBlock® Technology.

CP 399 FrogTape®



**HIGH BOND EXTERIOR
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE
FOR SELF-CLEANING PAINT TECHNOLOGY**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62
THICKNESS (MILS)	6.7
ELONGATION (%)	10
APPLICABLE STANDARDS*	-

For exterior use on surfaces such as painted wood, vinyl, aluminum, steel, brick, stucco and concrete and for keeping poly in place for spraying during paint projects; Removes cleanly without shredding on outdoor surfaces for up to 3 days.



Does not contain PaintBlock® Technology.

Test Before Use: Very high adhesion painter's tape for exterior surfaces only — test before use on all surfaces. Can cause damage if used on interior surfaces such as drywall.

PAINTER'S TAPES

CP 27®



**PREMIUM GRADE, SHURRELEASE®
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	22.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32.5
THICKNESS (MILS)	5.08
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For interior and exterior use on multiple surfaces, including painted walls, glass, vinyl, metal and wood; Not recommended for use on wallpaper, unpainted wallboard, ceiling tile or with uncured coatings.



*Better paint lines than ScotchBlue Original based on the comparative assessment of pro painters. ScotchBlue is the registered trademark of 3M Company.

CP 150



**PAINTER'S MATE GREEN®
MEDIUM ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.6
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For interior use on painted walls, woodwork, glass, metal and vinyl.



CF 33



**PREMIUM GRADE
LOW-TACK
PAINT MASKING TAPE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	26
THICKNESS (MILS)	7.0
ELONGATION (%)	12
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	-

For painting, new home and remodeling applications that demand a low-tack tape; Use on tile, as well as painted drywall, trim and woodwork.

The ONLY Tape With
**PAINTBLOCK®
TECHNOLOGY**
Seals Tape Edges! ®

Prevent Paint Bleed with PaintBlock® Technology

FrogTape® brand painter's tapes that are treated with PaintBlock® Technology have a super-absorbent polymer that reacts with the water in latex paint to form a micro-barrier that seals the edges of the tape, preventing paint bleed and creating clean, crisp paint lines. These FrogTape® products include Multi-Surface, Delicate Surface and Pro Grade, which are perfect for any painting project.



**BETTER
PAINT
LINES**
THAN SCOTCHBLUE
ORIGINAL®

CP 27®

PAINTER'S TAPES

COL 00



**PREMIUM GRADE, COLONIAL®
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	16

For industrial and automotive paint applications that do not require the use of a bake oven; Can also be used for general purpose masking applications that demand a premium performance tape.



CP 66®

CP 66®



**CONTRACTOR GRADE
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	5.2
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For residential and commercial painting and construction, industrial masking, holding and packaging; Use in applications that demand quick stick and conformability to irregularly shaped surfaces.



CP 102



**INDUSTRIAL GRADE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	17
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	33
THICKNESS (MILS)	5.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	16

For the industrial, commercial and residential paint markets for use on vinyl, metal, glass, plastic and rubber.



CP 107



**INDUSTRIAL GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For non-critical painting and industrial applications that demand good adhesion, quick stick and clean removal; Also used for general purpose packaging, bundling, holding, splicing and tabbing; For use on vinyl, glass, plastic and rubber.



GENERAL PURPOSE MASKING TAPES

CP 105



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	4.2
ELONGATION (%)	9.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For non-critical bundling and labeling applications; Also used for general purpose packaging, holding and splicing applications for home, school and industry.



CP 106



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.7
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For packaging, bundling, holding, splicing, masking and labeling applications.



CP 101



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.7
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For bundling, packaging, holding, splicing, masking and labeling for home, school and industry.



CP 83



**GENERAL PURPOSE GRADE
HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
THICKNESS (MILS)	4.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For general purpose packaging, bundling, holding, splicing, tabbing and banding applications involving a variety of substrates; Not recommended for exacting industrial masking, spray painting or oven baking applications.



CP 631



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.5
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 16

For general purpose labeling, color-coding, decorating and identification; Can also be used for packaging, bundling, binding, holding, splicing and banding applications.



* SEE PAGE 62 FOR APPLICABLE STANDARDS

FROGTAPE® PERFORMANCE MASKING TAPES

FrogTape® 225 Gold



FrogTape® 250 Light Blue



FrogTape® 325 Pink



PERFORMANCE GRADE
MODERATE TEMPERATURE
MEDIUM-HIGH ADHESION
DOES NOT CONTAIN PAINTBLOCK®
TECHNOLOGY

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	31
THICKNESS (MILS)	6.1
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	225
APPLICABLE STANDARDS*	16

For moderate temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry. (Gold - CP 225)



PERFORMANCE GRADE
MODERATE TEMPERATURE
MEDIUM-HIGH ADHESION
DOES NOT CONTAIN PAINTBLOCK®
TECHNOLOGY

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32.5
THICKNESS (MILS)	6.4
ELONGATION (%)	-
MAXIMUM SERVICE TEMPERATURE (°F)	250
APPLICABLE STANDARDS*	16

For moderate temperature, demanding paint masking applications in the transportation (auto, coaches, buses and marine) and metal fabrication industries; Also used for wet sanding applications. (Light Blue - CP 250)



PERFORMANCE GRADE
HIGH TEMPERATURE
MEDIUM-HIGH ADHESION
DOES NOT CONTAIN PAINTBLOCK®
TECHNOLOGY

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	6.6
ELONGATION (%)	12
MAXIMUM SERVICE TEMPERATURE (°F)	325
APPLICABLE STANDARDS*	1, 16

For high temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for wet sanding applications. (Pink - CP 325)



FrogTape® FLS 325



LOW-STRETCH
PVC
FINELINE

TENSILE (LBS/IN WIDTH)	17
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	5.5
ELONGATION (%)	190
MAXIMUM SERVICE TEMPERATURE (°F)	325
APPLICABLE STANDARDS*	-

For demanding, high-temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for metal preparation, painting, coating and gel coat masking; Used when crisp fineline edges are needed.

FrogTape® FLC 280



HIGH TEMPERATURE
PVC
FINELINE

TENSILE (LBS/IN WIDTH)	11
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	26
THICKNESS (MILS)	5.0
ELONGATION (%)	160
MAXIMUM SERVICE TEMPERATURE (°F)	280
APPLICABLE STANDARDS*	-

For demanding, high-temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for metal preparation, painting, coating and gel coat masking; Used when crisp fineline edges and compound, tight radius curves are needed.



FLC 280

PERFORMANCE MASKING TAPES

CP 650



HIGH PERFORMANCE GRADE
HIGH TEMPERATURE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	6.3
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	325
APPLICABLE STANDARDS*	1, 16

For demanding, high temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for metal preparation, painting, coating and gel coat masking; Recommended for indoor use only.



CP 901



HIGH PERFORMANCE GRADE
HIGH TEMPERATURE
HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	41
THICKNESS (MILS)	6.4
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	350
APPLICABLE STANDARDS*	16

For high temperature – up to 350 F – paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Recommended for indoor use only.



* SEE PAGE 62 FOR APPLICABLE STANDARDS

FLATBACK PAPER TAPES

FP 115



**HIGH PERFORMANCE GRADE
REINFORCED FLATBACK PAPER
VERY HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	40
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	120
APPLICABLE STANDARDS*	17

For industrial splicing, start-up, tabbing, shingling and overlapping applications; Effectively secures the paper to the core during roll start-up, holds the splice during processing and anchors the end of the roll securely.



FP 115



FP 97



**GENERAL PURPOSE GRADE
KRAFT FLATBACK PAPER
VERY HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	35
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	110
THICKNESS (MILS)	6.0
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	17, 28, 29, 30, 31

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding, patching and floor seaming applications; FDA compliant.



FP 96



**PACKAGING GRADE
KRAFT FLATBACK PAPER
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS (MILS)	6.1
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	17

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding and patching applications.



FP 202



**PACKAGING PREMIUM GRADE
HEAVY DUTY, BLEACHED KRAFT PAPER
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	55
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	56
THICKNESS (MILS)	7.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	180
APPLICABLE STANDARDS*	14, 17

For splicing various substrates; Used for heavy duty hand and machine carton sealing applications; Used for general purpose applications where a thick, flatback paper tape is required.



FLATBACK PAPER TAPES

FP 17



**PRINTABLE, LOW TEMPERATURE
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	52
THICKNESS (MILS)	5.4
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	17

For general purpose packaging, bundling, holding, binding, splicing, labeling, color-coding, banding, decorating and identification.



FP 227



**PRINTABLE
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	57
THICKNESS (MILS)	5.8
ELONGATION (%)	2.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 17

For full-web flexographic printing equipment or hand-labeling applications.

**Fluorescent colors do not conform to ASTM D-4236



FP 726



**PRINTABLE, HIGH-STRENGTH
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	72
THICKNESS (MILS)	6.6
ELONGATION (%)	2.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 17

For identification labeling, color-coding, packaging closure and other applications where printing is necessary.



SPECIALTY TAPES

CP 743



**SPECIALTY GRADE
PHOTOGRAPHIC BLACK
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	47
THICKNESS (MILS)	6.5
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For use in photo studios, film processing labs and home darkrooms; Recommended for use as a chart tape; Used for quality photographic reproduction work, including cropping and edging negatives for contact printing; Also used for sealing camera bellows and film holders against light leaks.



CP 327



**PREMIUM GRADE
MULTI-SURFACE CONTAINMENT TAPE
EXCELLENT ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.4
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For building containments in restoration, remodeling, remediation and abatement jobs; Can be used on interior and exterior walls, glass, vinyl, metal and wood.



CP 327

PACKAGING SOLUTIONS

**We understand
the challenges you face.**

That unsecure carton seals can cause problems along the supply chain, resulting in production issues, downtime and higher costs due to reworks, in addition to increasing the risk of product damage, contamination and theft caused by cartons popping open. That's why we pair our high-performance packaging tapes with innovative packaging equipment solutions to deliver packaging solutions for **the way you do business.**

Shurtape®
TRUE TO YOUR WORK

HOT MELT TAPES

HP 100®



GENERAL PURPOSE GRADE
25 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	22, 29

For manual or automated industrial carton sealing of lightweight cartons with minimal exposure to handling, shipping and load stress.



HP 200®



PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS) (MACHINE LENGTH)	1.9
THICKNESS (MILS) (HAND LENGTH)	1.8
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29

For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.



HP 300®



PERFORMANCE GRADE
35 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
HOLDING POWER TO FIBERBOARD (MINUTES)	25,000
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29

For critical closure manual or automated industrial carton sealing of medium-weight cartons that are subjected to increased handling stress.



HP 400®



HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	35,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29

For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; Can be used in moderate to severe handling environments.



HP 500®



HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 12, 22, 29

For manual or automated industrial carton sealing of heavy, bulky cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.



HP 800



HEAVY DUTY GRADE
50 MICRON POLYESTER FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	54
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	95
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.4
ELONGATION (%)	130
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 10, 11, 22, 29, 33

For manual or automated industrial carton sealing of heavy duty, critical closure cartons, including military supplies, high-value electronic components and hazardous materials and chemicals.



SPECIALTY HOT MELT TAPES

HP 232®



COLD ENVIRONMENT
PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 75
SERVICE TEMPERATURE RANGE (°F)	-20 - 100
APPLICABLE STANDARDS*	7, 9

For manual or automated industrial sealing of medium-weight cartons in cold temperature environments such as food processing and packaging facilities, as well as in cold weather moving/storage and unheated warehouses.



HP 235



RECYCLED CARTONS
PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	2.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	1, 7, 9

For manual and automated industrial sealing of medium-weight, highly recycled cartons, particularly 100 percent recycled.



HP 535



RECYCLED CARTONS
HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	1, 5, 7, 9

For manual or automated industrial carton sealing of heavy, bulky, highly recycled cartons, particularly 100 percent recycled, in high stress and extreme handling conditions; Ideal for ecommerce and single parcel shipments.



FE-2* & HP 200®
* SEE PAGE 26

PRINTED HOT MELT TAPES

HP 240



PRODUCTION GRADE
STANDARD MESSAGE PRINT
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29

Printed with standard messages to prevent pilferage or inform handlers of care; For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.

*Keep Refrigerated and Keep Frozen available as HP 242 cold environment packaging tape.



CUSTOM PRINT



25-50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

Custom-printed to prevent pilferage and allow personalization of outgoing cartons; For manual or automated industrial carton sealing of lightweight to heavy, bulky cartons in minimal to high stress and extreme handling conditions.

Available in a variety of grades, including HP 250, HP 350, HP 450 and HP 550.

Visit Shurtape.com or contact your Shurtape Sales Representative for more details.



PRINTABLE HOT MELT TAPES

HP 260



PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual sealing of medium-weight cartons in normal manufacturing and shipping environments; May also be used in automated industrial carton sealing applications.



HP 560



HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 12, 22, 29

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of heavy, bulky cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.



HP 460



HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	35,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; For use in moderate to severe handling environments.



WATER-BASED ACRYLIC TAPES

AP 101®



GENERAL PURPOSE GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	19
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29

For closure of lightweight cartons in manual and automated industrial sealing settings.



AP 301®



PERFORMANCE GRADE
35 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29

For manual and automated industrial sealing of medium-weight cartons in extreme temperature environments or subjected to handling stress.



AP 180®



PRODUCTION GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	21
THICKNESS (MILS)	1.8
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29

For manual and automated industrial sealing of lightweight cartons.



AP 401®



HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	31
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29

For heavy duty manual and automated industrial sealing of cartons exposed to extreme temperatures, rough handling and load stress; Also used for critical closure of bulky packages.



AP 201®



PRODUCTION GRADE
28 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	2.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29

For manual and automated industrial sealing of light-to medium-weight cartons.



* SEE PAGE 62 FOR APPLICABLE STANDARDS

WATER ACTIVATED TAPES

GP 100



**MEDIUM DUTY GRADE
NON-REINFORCED KRAFT PAPER
WATER ACTIVATED ADHESIVE**

PAPER SHEET (LBS)	60
MD TENSILE (LBS/IN WIDTH)	45
CD TENSILE (LBS/IN WIDTH)	23
APPLICABLE STANDARDS*	-

For light- to medium-weight packaging applications such as inner carton sealing or palletized loads.



WP 100



**ECONOMY GRADE
REINFORCED KRAFT PAPER
(MD) H110/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE**

MD TENSILE (LBS/IN WIDTH)	55
CD TENSILE (LBS/IN WIDTH)	25
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	5/8
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing light- to medium-weight cartons up to 25 lbs with normal exposure to handling, shipping and load stress.



WP 200



**PRODUCTION GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE**

MD TENSILE (LBS/IN WIDTH)	60
CD TENSILE (LBS/IN WIDTH)	27
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	1/2
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing medium-weight cartons up to 35 lbs in normal manufacturing and shipping environments; Ideal for single parcel shipments.



WP 300



**HEAVY DUTY GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE**

MD TENSILE (LBS/IN WIDTH)	75
CD TENSILE (LBS/IN WIDTH)	30
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	2-1-1-1-1-2
MD SPACING (IN)	7/16
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	9

For critical closure of heavy-weight cartons up to 45 lbs in all environments; Ideal for single parcel shipments.



WP 400



**EXTRA HEAVY DUTY GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE**

MD TENSILE (LBS/IN WIDTH)	80
CD TENSILE (LBS/IN WIDTH)	35
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	30
MD PATTERN	2-2-1-2-2
MD SPACING (IN)	19/32
CD SPACING (IN)	0.75
APPLICABLE STANDARDS*	9

For sealing large, bulky or heavy content cartons over 50 lbs in moderate to severe handling environments; Ideal for single parcel shipments.



CUSTOM PRINT



**REINFORCED KRAFT PAPER
WATER ACTIVATED ADHESIVE**

For sealing lightweight to large, bulky or heavy cartons in normal to severe handling environments; Ideal for single parcel shipments; Custom printed with logo or message for delivery of goods without pilferage.

Available in a variety of grades, including WP 150, WP 250, WP 350 and WP 450.

Visit Shurtape.com or contact your Shurtape Sales Representative for more details.



STRAPPING TAPES

GS 490



**ECONOMY GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	4.5
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29

For light duty strapping, packaging, bundling and palletizing applications.



GS 500



**UTILITY GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	150
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5.2
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29

For general purpose strapping, packaging, bundling and palletizing jobs.



GS 501



**INDUSTRIAL GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	175
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5.4
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29

For medium duty strapping, packaging, bundling and palletizing applications.



GS 521



**HIGH PERFORMANCE GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	300
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.3
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	8, 29

For heavy duty closing, strapping, packaging, bundling, unitizing, palletizing and L-Clip applications.



PS 748



**UTILITY GRADE
TENSILIZED, MOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	2.8
ELONGATION (%)	30
SERVICE TEMPERATURE RANGE (°F)	0 - 250
APPLICABLE STANDARDS*	-

For light duty strapping, packaging, bundling and palletizing applications.



* SEE PAGE 62 FOR APPLICABLE STANDARDS

SOLVENT-BASED ACRYLIC TAPES

PP 802



**PREMIUM PLUS GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.0
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For light to medium duty sealing, repairing and bundling of corrugated cartons, paper and film containers; Use with a hand-held or machine dispenser.

PP 803



**PREMIUM PLUS GRADE
30 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For overlamination, label protection and carton closure applications that demand 100 percent clarity; For use in a broad range of temperatures.

PP 810



**PREMIUM GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	1.8
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For sealing light- to medium-weight cartons in everyday shipping and handling environments; Also used for bundling and securing loose objects; Can also be used to repair corrugated cartons, paper and film containers; Use with a hand-held dispenser.

PP 815



**HEAVY DUTY GRADE
40 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	2.6
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For critical sealing and repairing of corrugated containers in hot and cold environments; Use with a hand-held dispenser.

OFFICE & SPECIALTY TAPES

VF 719



**ECONOMY GRADE
UPVC FILM
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	13
THICKNESS (MILS)	1.9
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	24

For use with a hand dispenser to seal cartons with recycled fiber content, heavy ink coverage or rough surfaces.

AP 15



**SHIPPING GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	19
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29

For protecting shipping labels and other printed surfaces against weather and handling.



PP 808



**GENERAL PURPOSE GRADE
UPVC FILM
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	2.1
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	-

For lightweight bag sealing, banding, bundling and packaging applications; Also used for color-coding tasks.



SD 935* & PP Series
* SEE PAGE 28

PP 807



**PREMIUM GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**


TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	23
THICKNESS (MILS)	1.8
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	-

For moisture-proof protection of labels and handling instructions; Also used for industrial and production laminating, joining, covering and protecting jobs.

* SEE PAGE 62 FOR APPLICABLE STANDARDS

TAPE APPLICATORS

SHURSEAL®



EASY TO RETROFIT
Seamless integration with case erectors and sealers



MULTIPLE WIPE-DOWN POINTS
Full use of the tape's adhesive



KNIFELESS OPENING CASE SEALS
With Folded Edge® Technology



OPEN DESIGN
Easy tape threading



RIGHTSIZE TAPE LENGTH
Reduce tape use while maintaining secure seals

Purpose-Built for Secure Seals, Every Time™.

The ShurSEAL® Packaging Solution is an automated case sealing system that combines high-performance Shurtape® HP Series packaging tape with innovative tape application technology. Designed to reduce material waste, downtime and maintenance costs, while increasing safety and content security, ShurSEAL delivers consistent and secure seals, carton after carton – to keep you running at peak production.



TAPE APPLICATORS

7000 SERIES

7000 Series Tape Applicators feature:

- Easy retrofit into existing erectors and sealers
- Stainless steel wash-down ready construction
- Open design for easy threading
- Front and rear tape tab adjustments
- Good to the Core® tape for less material waste
- Consistent seals at speeds up to 200 fpm
- Multiple wipe-down points for full use of the tape's adhesive
- Available with PrimeAlert™ Tape Monitoring System
- Folded Edge Technology also available



8000 SERIES (QUICK CHANGE)

8000 Series Quick Change Sealing System is uniquely engineered to tackle the downtime associated with slow tape roll changeovers, while offering all the benefits of the 7000 Series Applicators:

- Tape roll changes in less than 10 seconds
- Interchangeable inserts allow for easy offline threading
- Lightweight inserts reduce operator strain and lifting
- Retrofits to existing erectors and sealers
- Available with PrimeAlert™ Tape Monitoring System
- Folded Edge Technology also available



Sustainability

Reducing Tape Waste with The ShurSEAL® Solution.

Material waste is a common problem in manufacturing lines, with tape being a main contributor. From partially used “stub rolls” littered throughout factory floors to too much tape being applied to boxes, we observed end-of-line packaging inefficiencies first-hand and knew it was time to challenge the norm.

Designed to make a difference, The ShurSEAL Solution delivers consistent tape tab lengths on the sides of the box along with excellent wipe-down force to ensure full utilization of the tape's adhesive while minimizing waste. All while using Shurtape's high-performance packaging tape with Good to the Core® technology to maximize consumption of the entire roll.

In other words, The ShurSEAL Solution allows you to put less tape on the box and reduce material waste while delivering **Secure Seals, Every Time™**.

PACKAGING MACHINES

CASE ERECTORS

Fluid Form™
FLUID FORM™ CONTROLS
 Automated LxWxD robot path generation

ACTIVE CASE SQUARING
 Dynamic alignment for uniform square cases

DURABLE, SANITARY FRAME DESIGN
 Robust, reliable and hygienic

SAFE AND ERGONOMIC
 Operator-friendly

ROBOTIC PICK AND PASS
 Simplified case motion

OPPOSING-CUP CASE OPENING
 Reliable rack-open

Automated uniform case erectors for forming cartons and cases. Offering minimum complexity for maximum output and effortless set-up with intuitive Fluid Form™ Controls, these case erectors deliver quick and trouble-free changeovers, consistently square cases, fewer wear parts and less maintenance – for maximum operational efficiencies in your end-of-line packaging operations.

Shurtape Case Erectors offer:

- 40-50% fewer parts than competing machines.
- Dependable opposing-cup case opening.
- Active case squaring for square cases, every time.
- Secure Seals, Every Time.™
- Models available with both taping and glue capabilities; functions cannot be operated simultaneously.

PACKAGING MACHINES

CASE SEALERS

TOUCH-SCREEN CONTROLS
 With carton recipe memory

ANSI / PMMI COMPLIANT GUARDING
 Operator-friendly access and safety

OPTIONAL CASTERS
 For portability and dexterity

SPRING LOADED, SOFT GRIP BELTS
 Consistent and reliable case transport

MAJOR FLAP CONTROL
 Positive flap engagement for reduced jams

OPTIONAL TOP CAVITY LIFT
 Easy access to bottom tape applicator

Automated uniform case sealers capable of handling a large variety of case sizes and configurations. These case sealers are safe, simple, accessible and packed with functionality, including major flap management for reduced case jams and spring-loaded, soft-grip side belts for reliable case transport – because you have no time for downtime.

Shurtape Case Sealers offer:

- Standard 'Smart' sealer controls for easy line integration and command.
- Active major flap management for less downtime and higher efficiency.
- Spring-loaded side belts for consistent case engagement.
- Secure Seals, Every Time.™
- Models available with both taping and glue capabilities; functions cannot be operated simultaneously.

MANUAL APPLICATORS

**FOLDED EDGE®
HAND DISPENSERS**

Folded Edge Hand Dispensers feature:

- Improved wipe-down force for tamper-evident seals
- Retractable/pivoting safety blade
- Visible tape length indicators for tab length control
- Visible markers for single-strip, straight taping guidance
- Durable, heavy duty design for long-lasting performance
- Available in 2-inch (FE-2) and 3-inch (FE-3) models



HOT MELT GLUES

HG 200



**ETHYL VINYL ACETATE (EVA)
GOOD HEAT STABILITY**

VISCOSITY	1000 CPS (+/- 200) @ 350
SOFTENING POINT	230
APPLICATION TEMPERATURE RANGE (°F)	325 - 350

For standard case sealing of uncoated cases; Compatible with most automated or semi-automated hot melt glue equipment used for carton sealing.

HG 232



**ETHYL VINYL ACETATE (EVA)
LOW MELT
LESS CHAR**

VISCOSITY	900 CPS (+/- 180) @ 275
SOFTENING POINT	162
APPLICATION TEMPERATURE RANGE (°F)	250 - 300

For use when sealing secondary packages in lower temperature, colder environments; Compatible with most automated or semi-automated hot melt glue equipment used for carton sealing.

HG 235



**METALLOCENE (MET)
HIGH STABILITY
HIGH CLARITY**

VISCOSITY	900 CPS (+/- 180) @ 350
SOFTENING POINT	227
APPLICATION TEMPERATURE RANGE (°F)	325 - 360

For use when sealing hard-to-stick-to corrugated surfaces; Compatible with most automated or semi-automated hot melt glue equipment used for carton sealing.



MANUAL APPLICATORS



FT 36 & GS Series*
* SEE PAGE 19

FT 36

**PATENTED PISTOL-GRIP
FILAMENT TAPE DISPENSER
18, 24 & 36-MM WIDTH USE***

For manual packaging, L-Clipping, C-Clipping, strapping, bundling and palletizing applications.

RECOMMENDED PRODUCTS
GS Series

*Available in 48-MM and 72-MM upon request. Contact your Shurtape Sales Representative for more information.



SD 932

**STANDARD GRADE
PISTOL-GRIP TAPE DISPENSER
WITH ANTI-REVERSE BAR
2-IN WIDTH USE**

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719



SD 934



**PROFESSIONAL GRADE
PISTOL-GRIP TAPE DISPENSER
HIGH-IMPACT HANDLE, METAL FRAME
2-IN WIDTH USE**

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

SD 935



**PROFESSIONAL GRADE
PISTOL-GRIP TAPE DISPENSER
HIGH-IMPACT HANDLE, METAL FRAME
3-IN WIDTH USE**

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

SD 936



**DELUXE SILENCER
PISTOL-GRIP TAPE DISPENSER
HIGH-IMPACT HANDLE, METAL FRAME
2-IN WIDTH USE**

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

MANUAL APPLICATORS

SD 999



**FILAMENT TAPE DISPENSER
METAL-FRAMED
1-IN WIDTH USE**

For manual closing, strapping, packaging, bundling and palletizing applications.

RECOMMENDED PRODUCTS
GS Series, PS Series

SD 930




**ECONOMY GRADE
CLAMSHELL TAPE DISPENSER
HIGH-IMPACT PLASTIC
2-IN WIDTH USE**

For manual packaging applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

SD 931

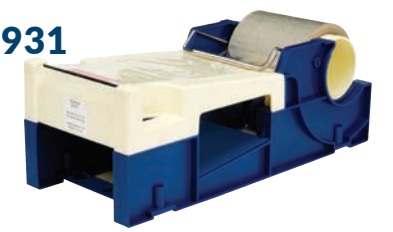

**LABEL PROTECTION DISPENSER
HIGH-IMPACT PLASTIC
4-IN WIDTH USE**

For use on packing lists, sales slips and labels.

RECOMMENDED PRODUCTS
AP 15, PP 807



SD 937 & PP 808*
* SEE PAGE 21

SD 937



**BAG-SEALING DISPENSER
METAL-FRAMED
9-MM WIDTH USE**

For single-stroke bag sealing applications.

RECOMMENDED PRODUCTS
PP 808

SD 955



**DESKTOP TAPE DISPENSER
HIGH-IMPACT PLASTIC
1-IN WIDTH USE**

For mending and light duty splicing tasks. Use with tapes with a 1-in or 3-in inside diameter core.

E-1



**ELECTRONIC GUMMED TAPE DISPENSER
RUGGED CONSTRUCTION
ONE-TOUCH PRESET LENGTHS
1.5 TO 3-IN WIDTH USE**

Used to feed, moisten and cut water activated tape to desired measurement in case sealing applications.

RECOMMENDED PRODUCTS
WP Series

M-1



**MANUAL GUMMED TAPE DISPENSER
STEEL CONSTRUCTION
BAKED ENAMEL FINISH
1.5 TO 3-IN WIDTH USE**

Used to feed, moisten and cut water activated tape to desired measurement in case sealing applications.

RECOMMENDED PRODUCTS
WP Series

AUTOMATED APPLICATOR

SP 5000



**RETROFIT TAPE HEAD
POWDER COATED STEEL
LEFT OR RIGHT HAND
2 OR 3-IN MODELS AVAILABLE**

For industrial automated carton sealing applications; Retrofits into most common case erecting and sealing equipment.

RECOMMENDED PRODUCTS
HP Series and AP Series machine rolls

*Shurtape® is an authorized distributor of Phoenix® gummed tape dispensers



CLOTH & DUCT TAPES

**We know all jobs have
one thing in common:**

they must be done right. That's why our complete line of cloth and duct tapes is engineered to exacting specs. When easy handling, varying adhesion levels and durable construction characteristics are needed, trust Shurtape to give every job a distinctive mark of **excellence**.


Shurtape
TRUE TO YOUR WORK

DUCK PRO
by Shurtape

T-REX
FEROCIOUSLY STRONG TAPE

DUCK PRO® BY SHURTAPE® DUCT TAPES

**Duck Pro®
PC 6**



**ECONOMY
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
NOMINAL THICKNESS (MILS)	6.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	-

For non-critical, general purpose use in packaging, bundling, sealing, repairing, holding and waterproofing; Also used in the remediation/abatement industry as a gooseneck tape.



Duck Pro® PC 9C



**GENERAL PURPOSE
CONTRACTOR GRADE
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	52

For general purpose use in industrial, plumbing, carpet, color-coding and splicing applications, as well as home and general repair applications, particularly where a discreet fix is needed; Features 30-day clean removal.



**Duck Pro®
PC 9S**



**GENERAL PURPOSE
CONTRACTOR GRADE
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	52

For heavy duty sealing, seaming, repairing, bundling, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry for tasks such as hanging poly-sheeting; Features 30-day indoor clean removal.



**Duck Pro®
PC 608**



**GENERAL PURPOSE
CONTRACTOR GRADE ABATEMENT
EXCELLENT HOLD
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	52

For use when building containments and a variety of other applications in remediation, restoration and abatement jobs; Can be used for mold and asbestos removal.



**Duck Pro®
PC 619**



**GENERAL PURPOSE
SPECIALTY GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	5

For general use, including color-coding, labeling, floor marking and book-binding; Also used for stage preparation in the motion picture and audio/visual industries; Can also be used for a variety of applications in the hospitality, motorsports and floral industries.



For ultimate performance, choose Shurtape duct tapes with Polybonded CO-EX Technology®. The co-extrusion process melds polyethylene, cloth and adhesive in a single, high temperature step, resulting in a permanent, airtight bond. This seamless construction creates added strength and will not delaminate.

QUALITY PERFORMANCE
**TRUSTED
RESULTS**



Duck Pro® by Shurtape® – Quality Performance. Trusted Results. We make it our business to know what contractors need. So, we know you need to save time and get the job done right, the first time. Since 1955, we've strived to be a leader in all things tape and that's why we're bringing you Duck Pro® by Shurtape® – the brands you know with the quality and performance you trust.

**Duck Pro® by Shurtape®
Cloth and Duct Tapes**

All jobs have one thing in common: they must be done right. That's why our line of Duck Pro® by Shurtape® Cloth and Duct Tapes is engineered to exacting specs, making these tapes some of the strongest and most reliable duct tapes on the market.

**Duck Pro® by Shurtape®
BR Code™ Scannable Solutions**
BR Code™ Scannable Solutions, powered by the BitRip® App, is a dynamic label solution that, when paired with the free app, can hold whatever information you need, whenever (and wherever) you want – Stick. Scan. Connect™.



DUCK PRO® BY SHURTAPE® DUCT TAPES

**Duck Pro®
PC 609**



**PROFESSIONAL
EXCELLENT HOLD
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
NOMINAL THICKNESS (MILS)	10.0
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	52

For use in the HVAC industry to repair thermal insulation and seal metal ductwork; Used in the manufactured housing industry to seam bottom boards and for patching, seaming and sealing; Used for packaging, bundling, holding, wrapping and waterproofing; Also used for asbestos and mold remediation.



**Duck Pro®
PC 621**



**PROFESSIONAL
ALL-PURPOSE GRADE
EXCELLENT CONFORMABILITY
AND HOLDING POWER
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
NOMINAL THICKNESS (MILS)	11.0
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	52

For demanding HVAC applications to hold, seal and seam sheet metal and flex duct, exhaust vents and preformed insulation; Can also be used in industrial applications for holding, splicing, protecting and packaging.



Duck Pro® PC 618C



**PROFESSIONAL
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
NOMINAL THICKNESS (MILS)	10.0
ELONGATION (%)	19
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	41, 52

For color-coding, holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications.



**Duck Pro®
PC 657®**




**PROFESSIONAL
HEAVY DUTY GRADE
EXCELLENT HOLD
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
NOMINAL THICKNESS (MILS)	14.5
ELONGATION (%)	15
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	52

For use in high performance motorsports applications, pre-manufactured housing and RV assembly, critical industrial applications and for protection during sandblasting and metal-peening operations.



**Duck Pro®
PC 618S**



**PROFESSIONAL
PERFORMANCE GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62.5
NOMINAL THICKNESS (MILS)	10.0
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	41, 52

For holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications; Can also be used as a condensation barrier in appliance assemblies.



**Duck Pro®
PC 769**



**PROFESSIONAL
CLEAN REMOVAL
QUICK STICK
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
NOMINAL THICKNESS (MILS)	12.2
ELONGATION (%)	24
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For use in for a variety of indoor and outdoor projects such as holding cords, bundling and repair projects; Clean removal for up to 6 months.



DUCK PRO® BY SHURTAPE® DUCT TAPES

**Duck Pro®
DF 545**



**PROFESSIONAL
PREMIUM DOUBLE-COATED CLOTH
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (^LS)	64
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (^ES)	52
NOMINAL THICKNESS WITHOUT LINER (MILS)	10.5
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	5

For securing carpet and pad at convention centers, arenas and hotels; Also used for general purpose hanging applications in the construction and abatement industries; Can also be used for splicing applications; Features 30-day indoor clean removal. ^LS=LINER SIDE; ^ES=EXPOSED SIDE




**Duck Pro®
PC 745**



**PREMIUM
SUPER-TOUGH
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	47
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	105
NOMINAL THICKNESS (MILS)	17.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For use on rough or dirty surfaces; For heavy duty repairs that demand an extremely strong hold; Can also be used as a bottom board tape in the manufactured housing industry.

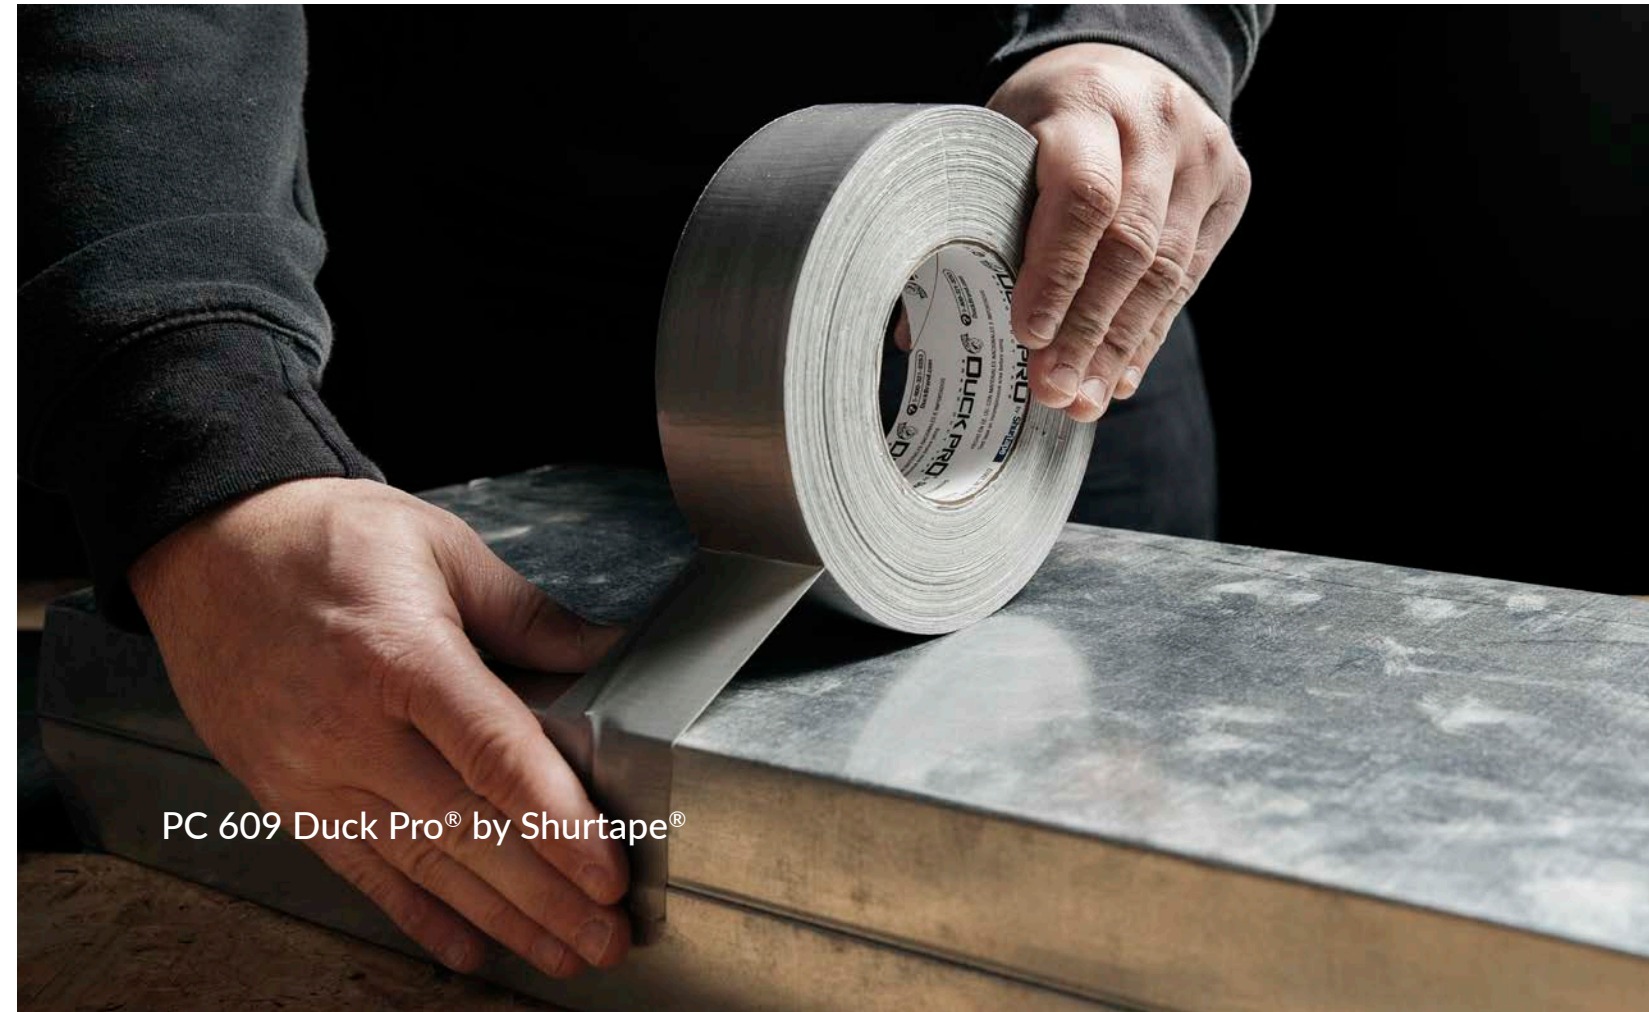

PC 609 Duck Pro® by Shurtape®

BR CODE™ SCANNABLE LABELS

POWERED BY THE BITRIP® APP

Duck Pro® by Shurtape®
BR Code™ Scannable Solutions,
powered by the BitRip® App,
is a label solution that can
hold whatever information
you need, whenever
(and wherever) you want
— *Stick. Scan. Connect™.*

STICK

Adhere a unique, preprinted label to a physical object, then scan and upload data immediately.

SCAN

Access asset and project information via the free BitRip® mobile app — it's simple to set up and easy to use.

CONNECT

Share digital data quickly and efficiently to keep track of key asset and project information.



Learn more at
Shurtape.com/BRCODE

BR CODE™ SCANNABLE LABELS

PC 627 BR



DUCK PRO® BY SHURTAPE®
PREPRINTED DUCT TAPE CODES
WATERPROOF BACKING
SCANNABLE WITH THE BITRIP® APP

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS (MILS)	10.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	-

For indoor and outdoor use to securely connect physical locations to digital information in applications that demand durability and versatility; Easy to tear and conformable to wrap around surfaces without losing usability.

FL 227 BR



DUCK PRO® BY SHURTAPE®
PREPRINTED PAPER TAPE CODES
MULTI-SURFACE USE
SCANNABLE WITH THE BITRIP® APP

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	40
THICKNESS (MILS)	5.8
ELONGATION (%)	2.5
SERVICE TEMPERATURE RANGE (°F)	40 - 150
APPLICABLE STANDARDS*	-

For use in securely connecting physical locations to digital information in indoor applications that demand a multi-surface solution that can remove easily from surfaces; Easy to tear and conformable to wrap around surfaces without losing usability.

PSL BR



DUCK PRO® BY SHURTAPE®
PREPRINTED PERMANENT LABELS
WATER-RESISTANT
SCANNABLE WITH THE BITRIP® APP

TENSILE (LBS/IN WIDTH)	-
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	3.0
ELONGATION (%)	-
SERVICE TEMPERATURE RANGE (°F)	0 - 200
APPLICABLE STANDARDS*	-

For permanent use indoors and out across a range of surfaces and substrates to securely connect physical locations to digital information; Individual label format for easy use on flat surfaces.

PXL BR



DUCK PRO® BY SHURTAPE®
PREPRINTED PERMANENT LABELS
HEAVY DUTY
SCANNABLE WITH THE BITRIP® APP

TENSILE (LBS/IN WIDTH)	-
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	4.1
ELONGATION (%)	-
SERVICE TEMPERATURE RANGE (°F)	-40 - 200
APPLICABLE STANDARDS*	-

For indoor and outdoor use to securely connect physical locations to digital information in applications that demand extreme durability and performance; Individual label format for easy use on flat surfaces; Weather and chemical resistant.

* SEE PAGE 62 FOR APPLICABLE STANDARDS

GENERAL PURPOSE DUCT TAPES

PC 7



UTILITY GRADE
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
NOMINAL THICKNESS (MILS)	7.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	52

For utility grade sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; For temporary or permanent use.



PC 8



GENERAL PURPOSE
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
NOMINAL THICKNESS (MILS)	8.0
ELONGATION (%)	21
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	52

For general purpose sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



STUCCO DUCT TAPES

PC 622



PREMIUM GRADE, CLOTH DUCT
CONFORMABLE WITH EXCELLENT HOLD
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
NOMINAL THICKNESS (MILS)	12.5
ELONGATION (%)	11
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	52

For protecting window and door frames during stucco applications; Used in high performance motorsports; For heavy duty bundling, holding and splicing.



PC 667



SPECIALTY GRADE, CLOTH DUCT
EASY TO TEAR
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For protective masking of non-painted surfaces, including steel, vinyl, aluminum and anodized metals; Use in plastering, stucco, concrete, pool and tile applications.



PC 7



PC 667



SF 682

HVAC DUCT TAPES

PC 857



UL PRINTED COATED CLOTH
HIGH STRENGTH AND HOLD
SYNTHETIC RUBBER BLEND ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
NOMINAL THICKNESS (MILS)	14.0
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	42, 51, 52, 53

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct.



HEAVY DUTY DUCT TAPES

PC 658



SUPER BOTTOM BOARD
SUPERIOR ADHESION AND HOLD
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	113
NOMINAL THICKNESS (MILS)	17.0
ELONGATION (%)	15
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	52

For seaming and sealing bottom board materials in pre-manufactured housing and RV assembly, set-up and maintenance; Can also be used to protect surfaces in metal-peening operations.



SF 682



SHURFLEX® PROFESSIONAL GRADE
FLEXIBLE AND CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	52

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, rigid ductboards, air vents, insulation, fibrous filter banks and pollution collection systems.



SF 683



SHURFLEX® PROFESSIONAL GRADE
FLEXIBLE AND CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
THICKNESS (MILS)	10.0
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	52

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, insulation, rigid ductboards, air vents and fiberboard.



MJ 100



PROFESSIONAL GRADE
FIBERGLASS MESH
WATER-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	75.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	8
THICKNESS (MILS)	9.0
ELONGATION (%)	3.83
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

For reinforcing joints, seams and connections when paint-on mastic is used in HVAC applications; Can also be applied to drywall seams before the application of joint compound.

PC 623



ECONOMICAL NUCLEAR GRADE
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
MEETS ASME NQA-1 GUIDELINES

TENSILE (LBS/IN WIDTH)	28
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
NOMINAL THICKNESS (MILS)	11.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 47

For a variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



PC 624



NUCLEAR GRADE
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
MEETS ASME NQA-1 GUIDELINES

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
NOMINAL THICKNESS (MILS)	13.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 47

For a more robust variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



PC 625



MILITARY SPEC LUSTERLESS
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
ASTM D5486M TESTED

TENSILE (LBS/IN WIDTH)	41
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
NOMINAL THICKNESS (MILS)	12.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	13, 56

For use as a premium, waterproof packaging tape that meets government specifications; Can also be used for moisture-proofing cartons, canisters and tubing.



* SEE PAGE 62 FOR APPLICABLE STANDARDS

COATED CLOTH TAPES

P- 628



PROFESSIONAL GRADE GAFFER'S MATTE-FINISH BACKING
HIGH TENSILE AND HOLDING POWER
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	10.75
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For use in the convention, hospitality, exhibition and trade show industries, and for general use in the audio/visual, television, photography, theatrical and motion picture industries; Used for protection and book-binding, color-coding, labeling and stage marking; Also used in the HVAC industry.



P- 660



PROFESSIONAL GRADE GAFFER'S MATTE-FINISH BACKING
HIGH TENSILE AND HOLDING POWER
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	10.75
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For bundling or securing wires, cables and props in the audio/visual, television, photography, theatrical and motion picture industries; Also used for color-coding, labeling, marking and book-binding applications; Will fluoresce under black light.



P- 672



PREMIUM GRADE GAFFER'S LIGHT DUTY MATTE-FINISH BACKING
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	77
THICKNESS (MILS)	12.0
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	21, 46

For sealing containers and protection from welding splatter; Can also be used for sealing rooms, abrasion protection, general holding, bundling and temporary repair applications.



COATED CLOTH TAPES

P- 665



PROFESSIONAL GRADE GAFFER'S MATTE-FINISH BACKING
HIGH ADHESION AND TACK
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	11.5
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	21

For demanding applications that require clean removal in the audio/visual, television, photography, theatrical and motion picture industries, such as holding wiring, lighting and props.



P- 665W



PROFESSIONAL GRADE GAFFER'S WATER-RESISTANT MATTE-FINISH BACKING
HIGH ADHESION AND TACK
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	11.5
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	21

For demanding applications that require clean removal and water resistance in the audio/visual, television, photography, theatrical and motion picture industries, such as holding wiring, lighting and props.



SPECIALTY TAPE

FT 175



GENERAL PURPOSE FRICTION COTTON CLOTH GRIP BACKING
GOOD ABRASION RESISTANCE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	46.4
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS (MILS)	12.0
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	15 - 176
APPLICABLE STANDARDS*	-

For insulating and wrapping electrical splices and connections; Protects wires and cables.



P- 665

T-REX® TAPES

T-Rex® Duct Tape



**SUPER-TOUGH, ALL-WEATHER
QUICK STICK
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	47
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	105
THICKNESS (MILS)	17.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For use on rough or dirty surfaces; For heavy duty repairs that demand a ferociously strong hold; Can also be used as a bottom board tape in the manufactured housing industry. (Duct Tape - PC 745)



T-Rex® Brute Force®



**SUPER-TOUGH, ALL-WEATHER
NATURAL RUBBER ADHESIVE
HOLD MORE, DO MORE™**

TENSILE (LBS/IN WIDTH)	250
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	17.0
ELONGATION (%)	21
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For the most extreme applications such as securing, hauling, binding, repairing, holding and more; Can be used as an alternative to ropes and chains in many applications. (Brute Force - PC 945)



T-Rex® Waterproof Tape



**EXTREME, ALL-WEATHER
HIGH-TACK
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	320
THICKNESS WITHOUT LINER (MILS)	30.0
ELONGATION (%)	>700
APPLICATION TEMPERATURE RANGE (°F)	-
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

Provides waterproof adhesion to the toughest surfaces and even works underwater; Built with R-Flex Technology™, this tape is durable and flexible enough for a wide range of fixes and waterproofing repairs.

T-REX® TAPES

T-Rex® Realtree Timber® Camo Duct Tape



**SUPER-TOUGH, ALL-WEATHER
QUICK STICK
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	43
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	45
THICKNESS WITHOUT LINER (MILS)	15.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For camouflaging or projects that require intense holding power for long-lasting repairs; For use on rough or dirty surfaces; For heavy duty repairs that demand a ferociously strong hold.

Realtree Timber® is a registered trademark of Jordan Outdoor Enterprises Ltd. and is used under license.



T-Rex® Brute Force®

T-REX® SPECIALTY TAPES

**T-Rex®
Clear Repair
Tape**



**HAND-TEARABLE
ALL-WEATHER
SOLVENT ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	23.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
HOLDING POWER TO STEEL (MINUTES)	1,800+
THICKNESS (MILS)	6.8
ELONGATION (%)	430.0
SERVICE TEMPERATURE RANGE (°F)	-5 - 150
APPLICABLE STANDARDS*	-

For quick and discreet repairs to a variety of surfaces, including those that require a water-resistant seal; Can be applied to wet* or dry surfaces; Can also be applied to rough surfaces and at below freezing temperatures. (Clear Repair Tape - RT 700)



*Follow recommended usage instructions for best results in wet-stick applications.

**T-Rex®
Double-Sided
Super Glue Tape**



**PERMANENT, ALL-WEATHER
HIGH-TACK, HAND-TEARABLE
AGGRESSIVE ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	-
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS WITHOUT LINER (MILS)	7.0
ELONGATION (%)	NA
APPLICATION TEMPERATURE RANGE (°F)	50 - 100
SERVICE TEMPERATURE RANGE (°F)	0 - 175
APPLICABLE STANDARDS*	-

High-tack double-sided super glue-like tape for mounting, automotive and surface-to-surface repairs.

**T-Rex®
Extreme
Tread Tape**



**ALL-WEATHER
INDUSTRIAL STRENGTH GRIP
HEAVY DUTY ADHESIVE**

TENSILE (LBS/IN WIDTH)	-
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	144
THICKNESS (MILS)	110.0
ELONGATION (%)	-
APPLICATION TEMPERATURE RANGE (°F)	50 - 100
SERVICE TEMPERATURE RANGE (°F)	-40 - 220
APPLICABLE STANDARDS*	-

For permanent application on a variety of surfaces, such as steps, walkways, trailers, ladders and more to help prevent slips and accidents; Meets and exceeds OSHA and ADA federal recommendations. (Extreme Tread Tape - TT-700)



T-Rex® Waterproof



FOIL, FILM & FOAM TAPES

**We know your reputation
is on the line.**

That's why we offer a comprehensive assortment of foil, film and foam tapes that are engineered for performance in a range of jobs, from HVAC and insulation to electrical, safety marking and more. With options that meet the code, perform in the cold and deliver superior results, Shurtape has you covered with the tapes you need to ensure your work exceeds your **exacting standards.**

Shurtape®
TRUE TO YOUR WORK™

ALUMINUM FOIL TAPES

AF 099



2-MIL DEAD-SOFT ALUMINUM FOIL
FLEXIBLE AND EASY TO USE
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.1
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	45, 50, 51, 52, 53

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct; Used when repairing metal and sheet metal; Temporary fixes/repairs for outdoor electrical boxes; Sheet metal ventilation fan exhaust ductwork and dryer vents; Bath fan installs and replacements.



AF 100



2-MIL DEAD-SOFT ALUMINUM FOIL
FLEXIBLE AND EASY TO USE
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.2
ELONGATION (%)	2
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	45, 50, 51, 52, 53

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct; Used when repairing metal and sheet metal; Temporary fixes/repairs for outdoor electrical boxes; Sheet metal ventilation fan exhaust ductwork and dryer vents; Bath fan installs and replacements.



AF 914CT



1.5-MIL ALUMINUM FOIL
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	18.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS WITHOUT LINER (MILS)	3.4
ELONGATION (%)	2
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 52

For joining and sealing aluminum-backed and fibrous insulation and metal ductwork in temperatures ranging from -20 F to 260 F; Also used to repair metal and sheet metal.



AF 975CT



2-MIL ALUMINUM FOIL
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	4.0
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 52

For use in temperatures ranging from -20 F to 260 F when joining and sealing aluminum-backed or fibrous insulation and metal ductwork; Can also be used when repairing metal and sheet metal.



ALUMINUM FOIL TAPES

SF 685



PRINTED SHURMASTIC® FOIL
FORMS A PERMANENT BOND
BUTYL RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	255
THICKNESS (MILS)	17.0
ELONGATION (%)	560.0
SERVICE TEMPERATURE RANGE (°F)	-20 - 200
APPLICABLE STANDARDS*	44, 48, 49, 52

For indoor or outdoor use to seal Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



SF 686



UL PRINTED SHURMASTIC® FOIL
INSTANT, WATER-RESISTANT GRIP
BUTYL RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	23.8
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	111
THICKNESS (MILS)	17.0
ELONGATION (%)	-
SERVICE TEMPERATURE RANGE (°F)	-20 - 200
APPLICABLE STANDARDS*	39, 48, 49, 51, 52, 53

For airtight and moisture-free sealing of Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



DC 181



UL PRINTED BOPP FILM
EXCELLENT CONFORMABILITY
ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	31
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	2.7
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	-10 - 210
APPLICABLE STANDARDS*	45, 51, 52, 53

For use on Class 1 Flex Duct for connecting, joining, sealing and patching flexible air ductwork.



AF 099

ELECTRICAL TAPES

EV 57B



GENERAL PURPOSE GRADE
UL LISTED ELECTRICAL
CONFORMABLE AND HAND-TEARABLE
PVC FILM

TENSILE (LBS/IN WIDTH)	16
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	7.0
ELONGATION (%)	250
SERVICE TEMPERATURE RANGE (°F)	32 - 176
APPLICABLE STANDARDS*	27, 53

For primary insulation of electrical splices up to 600 V; Can be used when wrapping wire harnesses and cables; For indoor and outdoor use.



EV 57C



GENERAL PURPOSE GRADE
UL LISTED ELECTRICAL
CONFORMABLE AND HAND-TEARABLE
PVC FILM

TENSILE (LBS/IN WIDTH)	16
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	7.0
ELONGATION (%)	250
SERVICE TEMPERATURE RANGE (°F)	32 - 176
APPLICABLE STANDARDS*	27, 53

For color-coding and phasing in electrical applications; Can also be used as primary insulation of electrical splices up to 600 V; Can be used when wrapping wire harnesses and cables; For indoor and outdoor use.



EV 77B



PROFESSIONAL GRADE
UL LISTED ELECTRICAL
HIGH TENSILE
PVC FILM

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	7.0
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 53

For primary insulation of electrical splices up to 600 V; Also used as a jacketing on high voltage splices and repairs; Can be used when wrapping wire harnesses and cables; For indoor and outdoor use.



EV 77C



PROFESSIONAL GRADE
UL LISTED ELECTRICAL
HIGH TENSILE
PVC FILM

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	7.0
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 53

For color-coding and identifying phases, circuits, feeders and branches; Also used for primary insulation of electrical splices up to 600 V; Can be used for marking container contents, piping and conduit systems, and as a warning tape; For indoor and outdoor use.



EV 97B



PREMIUM GRADE
UL LISTED ELECTRICAL
HIGH TENSILE
PVC FILM

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	8.5
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 53

For primary insulation of electrical splices up to 600 V; Also used as a jacketing on high voltage splices and repairs; Can be used when wrapping wire harnesses and cables; For indoor and outdoor use.



LR 117B



HIGH VOLTAGE
HIGH ELONGATION
LINERLESS EPR

TENSILE (PSI)	400
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS (MILS)	30.0
ELONGATION (%)	760
CONTINUOUS OPERATING TEMPERATURE MAX (°F)	194
APPLICABLE STANDARDS*	6, 7, 15

For insulating splices and terminations up to 69,000 V; Also used for insulating and protecting bus bars up to 35,000 V; Can be used to seal electrical splices from moisture; Also for jacketing for applications greater than 69,000 V; Compatible with all extruded dielectric cable insulations; For indoor and outdoor use.



POLYETHYLENE/PVC FILM TAPES

BT 100



GENERAL PURPOSE BARRICADE
2-IN LETTERS ARE EASY TO READ
RESISTS SAGGING
ADHESIVE-FREE

THICKNESS (MILS)	2.0 - 3.0
APPLICABLE STANDARDS*	-

For marking restricted areas and managing access to work sites by professionals in the safety, construction, utilities, hardware and other industries.

*Lead Hazard and Wet Paint (English only); Caution and Danger (available bilingual English/Spanish).

VP 410




GENERAL PURPOSE GRADE
LINE SET
SPVC FILM

TENSILE (LBS/IN WIDTH)	13
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	20
THICKNESS (MILS)	5.25
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	20 - 140
APPLICABLE STANDARDS*	23

For floor, lane and aisle marking, color-coding and identification applications; Also used in the HVAC industry to wrap line sets, seam closed cell sponge insulation, and insulate air ducts and underground pipes; Flexible for marking around objects; Meets OSHA color-coding requirements.



VP 415

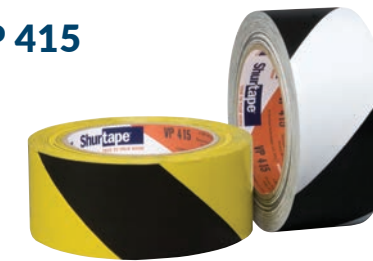

GENERAL PURPOSE GRADE
WARNING STRIPE
SPVC FILM

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	12
THICKNESS (MILS)	6.6
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	20 - 140
APPLICABLE STANDARDS*	23

For lane marking and identification of safety zones and hazard areas; Resistant to abrasion, UV light, acid, alkalides, oils, moisture, humidity and corrosion; Flexible for marking around objects; Meets OSHA requirements for hazard markings.



PW 100



GENERAL PURPOSE GRADE
PVC PIPE WRAP
CORROSION/MOISTURE RESISTANT
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	20
THICKNESS (MILS)	10.0
ELONGATION (%)	200
APPLICATION TEMPERATURE RANGE (°F)	14 - 176
SERVICE TEMPERATURE RANGE (°F)	32 - 104
APPLICABLE STANDARDS*	-

For corrosion protection of under and above ground metal and plastic pipe installations.



VP 415

POLYETHYLENE/PVC FILM TAPES

PE 333



**POLYETHYLENE FILM
SERRATED OR STRAIGHT EDGE
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	7.0
ELONGATION (%)	80
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting when UV resistance is not required; Also for masking curved surfaces; Used for seaming underslab vapor barriers; Also used in the abatement, restoration and remodeling industries to hold poly-sheeting when building containments.

PE 444



**POLYETHYLENE FILM
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	7.0
ELONGATION (%)	76
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting; Delivers residue-free removal for a variety of applications.



PE 555



**POLYETHYLENE FILM
EXCELLENT TEARABILITY
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	92
THICKNESS (MILS)	9.0
ELONGATION (%)	94
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces during stucco application and painting; Can also be used for surface protection, color-coding, splicing and seaming on pipe-fitting covers; Delivers residue-free removal for a variety of applications.



PE 900



**POLYETHYLENE FILM
SERRATED OR STRAIGHT EDGE
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	85
THICKNESS (MILS)	9.0
ELONGATION (%)	100
SERVICE TEMPERATURE RANGE (°F)	14 - 158
APPLICABLE STANDARDS*	52, 55

Used for marine shrink applications and vapor barrier seaming in boat storage and transportation applications; Also used for patching, repairing, bundling, wrapping and sealing applications across a variety of surfaces.

PE 901



**POLYETHYLENE FILM
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	85
THICKNESS (MILS)	9.0
ELONGATION (%)	100
SERVICE TEMPERATURE RANGE (°F)	14 - 158
APPLICABLE STANDARDS*	52, 54, 55

Used for protection during marine transportation and temporary outdoor boat storage; For use in seaming and sealing applications across a variety of surfaces; May be used on surfaces that are gel-coated.

SPECIALTY TAPES

LS 300



**UV-RESISTANT LINE SET
EASY TO UNWIND
ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	2.85
ELONGATION (%)	180
SERVICE TEMPERATURE RANGE (°F)	-35 - 210
APPLICABLE STANDARDS*	-

For taping outdoor HVAC components.



COMPOSITE TAPES

AF 984CT



**FOIL/SCRIM/KRAFT (FSK)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED**

TENSILE (LBS/IN WIDTH)	34
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	7.4
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	36, 52

For sealing seams in scrim-reinforced duct insulation.



AF 990CT



**ALL SERVICE JACKET (ASJ)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	38, 52

For use in cold and dual temperature systems to seal, seam and join scrim-reinforced pipe and duct insulation.



AF 995CT



**ALL SERVICE JACKET+ (ASJ+)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	52

For permanently sealing butt joints on ductboard and pipe insulation wrapped with ASJ+ faced backing.



MB 100CT



**WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS WITHOUT LINER (MILS)	6.9
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	52

For seaming and sealing VR-R plus insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



MB 200CT



**WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED**

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	6.7
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	52

For medium duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



MB 300CT



**WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED**

TENSILE (LBS/IN WIDTH)	41
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	52

For heavy duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



* SEE PAGE 62 FOR APPLICABLE STANDARDS



DOUBLE- COATED TAPES

**We know you demand
versatility to get the job done.**

That's why we have engineered a comprehensive assortment of double-coated tapes, including paper, film, cloth and transfer adhesive options. Whether you're mounting, splicing, joining or laminating, these tapes have one thing in common: an unsurpassed level of **quality**.

Shurtape®
TRUE TO YOUR WORK™

DOUBLE-COATED PAPER TAPES

DF 65



GENERAL PURPOSE GRADE
FLAT PAPER
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
THICKNESS WITHOUT LINER (MILS)	5.0
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	50 - 225
APPLICABLE STANDARDS*	26

For mounting, holding, splicing, tabbing and fastening applications that demand aggressive adhesion.



DT 200



PREMIUM PERFORMANCE GRADE
SOLVENT-BASED ACRYLIC ADHESIVE
NONWOVEN TISSUE

TENSILE (LBS/IN WIDTH)	6.3
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS WITHOUT LINER (MILS)	4.5
ELONGATION (%)	3.5
SERVICE TEMPERATURE RANGE (°F)	-20 - 212
APPLICABLE STANDARDS*	-

For high-speed splicing in the corrugated cardboard production process in temperatures up to 400 F; Can also be used as a mounting and laminating system for irregularly shaped metals, foams, foils and nameplates; For manual applications.

GG 200



GOLF GRIP
RUBBER-BASED ADHESIVE
CREPE PAPER

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS WITHOUT LINER (MILS)	6.5
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 150
APPLICABLE STANDARDS*	-

For factory and clubhouse golf grip installation; Can also be used for mounting, holding, splicing, tabbing and fastening a variety of substrates when an aggressive, double-sided tape is required.



DOUBLE-COATED FILM TAPES

DP 380



GENERAL PURPOSE GRADE
POLYESTER (PET) FILM
SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	14.3
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS WITHOUT LINER (MILS)	4.4
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	-20 - 257
APPLICABLE STANDARDS*	-

For mounting banners, light signs, window blinds, emblems and nameplates; Also used for long-term or permanent bonding and attachment applications, including POP displays and laminating materials.

DP 401



PROFESSIONAL GRADE
POLYESTER (PET) FILM
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	14
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS [^])	124
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES [^])	142
THICKNESS WITHOUT LINER (MILS)	4.7
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	32 - 150
APPLICABLE STANDARDS*	-

For polyethylene (PE) foam fabrication and lamination processes; Ideal for packaging applications that require cushioning, protection or stabilization of contents; Can also be used with die-cuts, gaskets, POP merchandising and shelf displays.

[^]LS=LINER SIDE; [^]ES=EXPOSED SIDE

DS 154
FrogTape®



PROFESSIONAL GRADE CONTAINMENT
EXCELLENT HOLD
FINE STRUCTURED CREPE
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS [^])	60
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES [^])	27
THICKNESS WITHOUT LINER (MILS)	8.5
ELONGATION (%)	9
SERVICE TEMPERATURE RANGE (°F)	32 - 120
APPLICABLE STANDARDS*	-

For holding poly-sheeting and other protective materials when creating high-performance containment systems; Use for restoration, abatement and remodeling tasks such as painting, cleaning, sanding, mold remediation, asbestos removal and more.



[^]LS=LINER SIDE; [^]ES=EXPOSED SIDE



DS 154

DOUBLE-COATED FOAM TAPES

DF 164



GENERAL PURPOSE GRADE
POLYETHYLENE FOAM
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	145
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	137
THICKNESS WITHOUT LINER (MILS)	66.1
ELONGATION (%)	339
SERVICE TEMPERATURE RANGE (°F)	0 - 180
APPLICABLE STANDARDS*	-

For bonding to most surfaces including low-surface energy materials like polyethylene and polypropylene, vibration reduction and sound damping.

DOUBLE-COATED CLOTH TAPES


DF 642



INDUSTRIAL GRADE
POLYESTER/COTTON BLEND CLOTH
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	32
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
NOMINAL THICKNESS WITHOUT LINER (MILS)	12.0
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 225
APPLICABLE STANDARDS*	-

For carpet and pad installation at convention centers, arenas and hotels; Used for general purpose holding and mounting applications; Can also be used to hold signs and dispensers for POP merchandising.

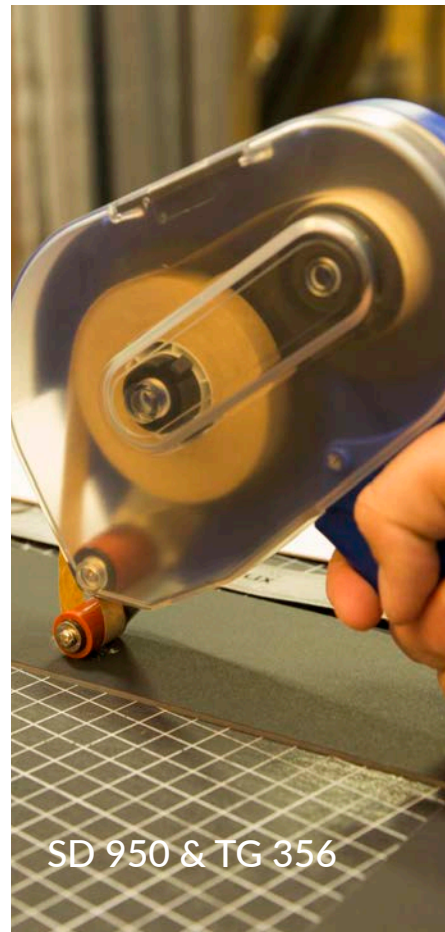

SD 950 & TG 356

DISPENSER

SD 950



ADHESIVE TRANSFER GUN
PISTOL-GRIP
EASY TO LOAD

For use with reverse wound adhesive transfer tape to quickly and easily make almost any surface self-adhesive; For mounting, holding, joining and splicing paper, cardboard, plastics, wood, leather, glass and painted surfaces; Can also be used when gift wrapping; For use with 0.75 in maximum width rolls.

RECOMMENDED PRODUCTS
TG 356



TRANSFER ADHESIVE TAPES

TA 450



GENERAL PURPOSE GRADE
RESISTS HUMIDITY, MOST SOLVENTS
ACRYLIC-BASED ADHESIVE

ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS WITHOUT LINER (MILS)	1.6
SERVICE TEMPERATURE RANGE (°F)	-22 - 302
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.



TG 356



PREMIUM PERFORMANCE GRADE
RESISTS HUMIDITY, MOST SOLVENTS
ACRYLIC-BASED ADHESIVE


ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS WITHOUT LINER (MILS)	2.0
SERVICE TEMPERATURE RANGE (°F)	-60 - 250
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.; Use with an adhesive transfer gun to make almost any surface self-adhesive. Reverse wound on a 1-in I.D. core.



INDUSTRIAL INNOVATIONS

BR CODE™
SCANNABLE LABELS
POWERED BY THE BITRIP® APP

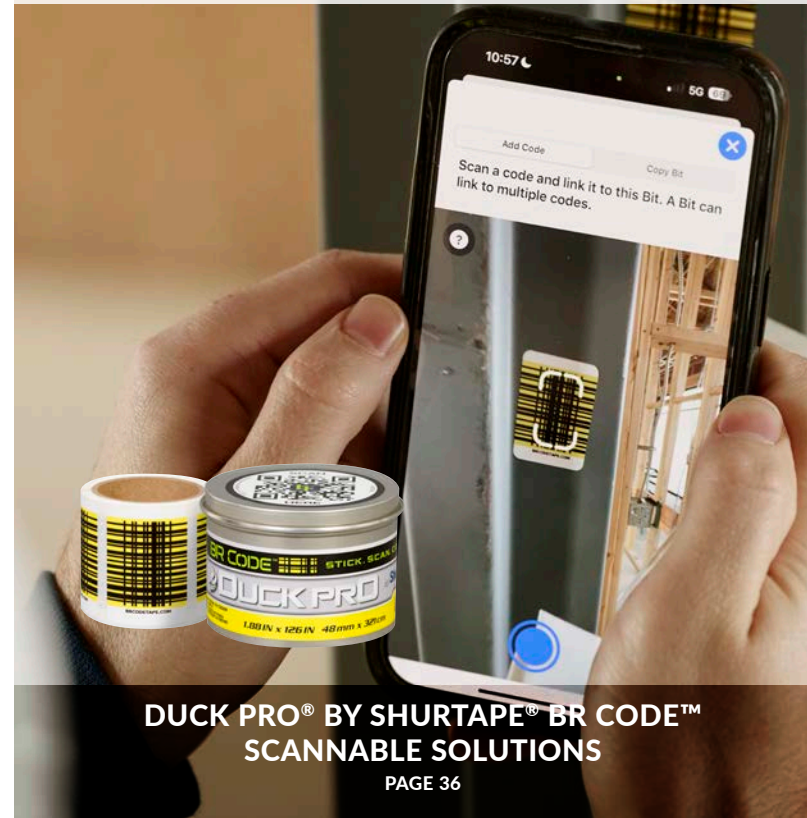

DUCK PRO® BY SHURTAPE® BR CODE™
SCANNABLE SOLUTIONS
PAGE 36

DUCK PRO
by Shurtape



DUCK PRO® BY SHURTAPE®
CLOTH AND DUCT TAPES
PAGE 32



FROGTAPE® PERFORMANCE MASKING TAPES
PAGE 8

Shurtape®



SHURTAPE® PACKAGING MACHINES
PAGE 24

APPLICABLE STANDARDS

1 AMS-T-21595	20 CID A-A-113D, Type I, Class A	39 FSI 5/SDI 25
2 ANSI No. 45.2.2	21 CID A-A-1586A	40 FSI 15/SDI 20
3 ASME NQA-1	22 CID A-A-1684C	41 FSI 15/SDI 25
4 ASTM D 1974/D 1974M-16	23 CID A-A-1689B, Type I, Class 2	42 FSI 15/SDI 30
5 ASTM D 4236	24 CID A-A-1689B, Type II	43 FSI 15/SDI 40
6 ASTM D 4325	25 CID A-A-180C, Type II, Grade A	44 FSI 20/SDI 40
7 ASTM D 4388	26 CID A-A-180C, Type II, Grade B	45 FSI 25/SDI 50
8 ASTM D 5330, Type II	27 CSA 22.2	46 MIL-STD-2041D
9 ASTM D 5479-17, Type I	28 FDA Indirect Contact CFR 21, 174.5	47 NRC Guide 1.38
10 ASTM D 5486M-12, Type I, Class 2	29 FDA Indirect Contact CFR 21, 175.105	48 Pressure Classes SMACNA 1/2, 1, 2, 3, 4 & 6
11 ASTM D 5486M-12, Type II, Class 2	30 FDA Indirect Contact CFR 21, 176.170	49 Seal Classes A, B, C
12 ASTM D 5486M-12, Type III	31 FDA Indirect Contact CFR 21, 176.180	50 UL 181A-P
13 ASTM D 5486M-12, Type IV	32 FDA Indirect Contact CFR 21, 177.1520	51 UL 181B-FX
14 ASTM D 5486M-12, Type V	33 FDA Indirect Contact CFR 21, 177.1630	52 Tested in accordance with UL 723
15 ASTM D 570	34 FSI 0/SDI 0	53 UL Listed
16 ASTM D 6123/D 6123M-97 (2012), Type I	35 FSI 0/SDI 5	54 ASTM D 3833
17 ASTM D 6123/D 6123M-97 (2012), Type II	36 FSI 5/SDI 0	55 ASTM E84
18 ASTM E 2072	37 FSI 5/SDI 5	56 ASTM D 5486M-20, TYPE IV
19 CCMC Report No.: 13401-R	38 FSI 5/SDI 10	

WARRANTY INFORMATION

Shurtape Technologies, LLC, guarantees its products to be in compliance with acceptable standards for material and workmanship, but limits its obligation under this warranty to replacement or, at its option, reimbursement of the purchase price of returned merchandise shown to its satisfaction to have been defective by such standards at the time it was shipped by Shurtape Technologies, LLC. Shurtape Technologies, LLC, neither makes nor authorizes, nor shall be bound to any other warranty of merchantability, and under no circumstances will it be liable for any loss, damage, expense or consequential damage or loss of any kind either in tort or contract, arising directly or indirectly out of or in connection with the use of or inability to use its products.

Product literature, specifications, product and test reports, and other descriptive and advertising material and information are based on research testing and are believed to be reliable but constitute no part of this warranty, which is exclusively and strictly limited to the foregoing. Shurtape products are sold on the understanding that the buyer has determined or will determine the suitability of the product for buyer's purposes, and is reminded that some materials are sensitive to adhesive-based products and discretion should be used in their application.

No agent or representative is authorized to give any guarantee or make any statement contrary to or inconsistent with this warranty.

All trademarks listed are the property of Shurtape Technologies, LLC, unless otherwise noted. Information included in this catalog is true at time of printing.

Want to learn more about our company, locations and brands?
 Visit us online at ShurtapeTech.com.



PRODUCT INDEX

Duck Pro® by Shurtape®

Duck Pro® PC 6	32
Duck Pro® PC 9C	32
Duck Pro® PC 9S	32
Duck Pro® PC 608	32
Duck Pro® PC 619	32
Duck Pro® PC 609	34
Duck Pro® PC 618C	34
Duck Pro® PC 618S	34
Duck Pro® PC 621	34
Duck Pro® PC 657*	34
Duck Pro® PC 769	34
Duck Pro® DF 545	35
Duck Pro® PC 745	35

Shurtape® Brand

AF 099	50
AF 100	50
AF 914CT	50
AF 975CT	50
AF 984CT	55
AF 990CT	55
AF 995CT	55
AP 15	21
AP 101*	17
AP 180*	17
AP 201*	17
AP 301*	17
AP 401*	17
BT 100	53
CF 33	5
COL 00	6
CP 27*	5
CP 66*	6
CP 83	7
CP 101	7
CP 102	6
CP 105	7
CP 106	7
CP 107	6
CP 150	5
CP 327	11
CP 631	7
CP 650	9
CP 743	11
CP 901	9
DC 181	51
DF 65	58
DF 164	59
DF 642	60
DP 380	59
DP 401	59
DT 200	58
E-1	29
EV 57B	52
EV 57C	52
EV 77B	52
EV 77C	52
EV 97B	52
FE-2	26
FE-3	26

FL 227 BR	37
FP 17	11
FP 96	10
FP 97	10
FP 115	10
FP 202	10
FP 227	11
FP 726	11
FT 36	28
FT 175	43
GG 200	58
GP 100	18
GS 490	19
GS 500	19
GS 501	19
GS 521	19
HG 200	26
HG 232	26
HG 235	26
HP 100*	14
HP 200*	14
HP 232*	15
HP 235	15
HP 240	16
HP 260	16
HP 300*	14
HP 400*	14
HP 460	16
HP 500*	14
HP 535	15
HP 560	16
HP 800	14
HP Custom Print	16
LR 117B	52
LS 300	54
M-1	29
MB 100CT	55
MB 200CT	55
MB 300CT	55
MJ 100	40
P- 628	42
P- 660	42
P- 665	43
P- 665W	43
P- 672	42
PC 7	38
PC 8	38
PC 622	39
PC 623	41
PC 624	41
PC 625	41
PC 627 BR	37
PC 658	41
PC 667	39
PC 857	40
PE 333	54
PE 444	54
PE 555	54
PE 900	54
PE 901	54
PP 802	20
PP 803	20

PP 807	21
PP 808	21
PP 810	20
PP 815	20
PS 748	19
PSL BR	37
PXL BR	37
PW 100	53
SD 930	29
SD 931	29
SD 932	28
SD 934	28
SD 935	28
SD 936	28
SD 937	29
SD 950	60
SD 955	29
SD 999	29
SF 682	40
SF 683	40
SF 685	51
SF 686	51
SP 5000	29
SP 7000	23
SP 8000	23
TA 450	60
TG 356	60
VF 719	21
VP 410	53
VP 415	53
WP 100	18
WP 200	18
WP 300	18
WP 400	18
WP Custom Print	18

FrogTape® Brand

CF 120 FrogTape®	4
CF 160 FrogTape®	4
CP 130 FrogTape®	4
CP 199 FrogTape®	4
CP 399 FrogTape®	4
DS 154 FrogTape®	58
FrogTape® 225 Gold (CP 225)	8
FrogTape® 250 Light Blue (CP 250)	8
FrogTape® 325 Pink (CP 325)	8
FrogTape® FLC 280	8
FrogTape® FLS 325	8

T-Rex® Brand

T-Rex® Duct Tape	44
T-Rex® Brute Force®	44
T-Rex® Waterproof Tape	44
T-Rex® Realtree Timber® Camo Duct Tape	45
T-Rex® Clear Repair Tape	46
T-Rex® Double-Sided Super Glue Tape	46
T-Rex® Extreme Tread Tape	46

SHURTAPE TECHNOLOGIES, LLC
PO BOX 1530
HICKORY, NC 28603-1530 USA

SHURTAPE.COM
1.888.442.TAPE
CUSTSERVICE@SHURTAPE.COM

ISO 9001-CERTIFIED QUALITY SYSTEM

Shurtape
TECHNOLOGIES

©2024 SHURTAPE TECHNOLOGIES, LLC
FORM #CAT-COMP-04/2024
PRINTED IN USA ON RECYCLED PAPER

