


SPECIFICATIONS

| | |
|---|---|
| Includes | D-TEK Stratus Infrared refrigerant sensor Lithium ion battery Spare filters AC wall charger DC car charger Extra-long probe Carrying case Earbuds |
| Compatible refrigerants | |
| Refrigerant sensor | R22, R32, R134a, R404a, R407c, R410a, R422b, R448a, R449a, R452a/b, R454a/b, R507 (AZ50), R1234yf/ze and more |
| CO ₂ sensor | CO ₂ (R744) |
| Flammable refrigerant sensor | R290, R600a, R441a |
| Sensitivity (tested to EN14624 standard) | |
| R134a | 0.04 oz./yr (1 g/yr) |
| R1234yf | 0.02 oz./yr (0.5 g/yr) |
| R290 | 0.2 oz./yr (5 g/yr) |
| R744 (CO ₂) | 0.07 oz./yr (2 g/yr) |
| Ammonia | 0.1 oz./yr (3 g/yr) |
| Sensor life | Up to 2,000 hours |
| Power source | Lithium ion battery (rechargeable) USB (can operate while charging) |
| Battery life | ~8 hours (Cloud Hunting Mode) ~10 hours (Pinpoint Mode) |
| Weight | 1.10 lb. (500 g) |
| Certifications | EN14624:2020 A2L certified CE, UKCA |
| Patents | Pat. US 11441969B2 Pat. US 11262296B2 Application #18171080.7 |
| Probe length (standard probe) | ~17 in. (43 cm) |
| Warranty | Two-year over-the-counter |

ORDERING INFORMATION

| | |
|---|-------------|
| D-TEK Stratus (includes refrigerant sensor only) | 724-202-G1 |
| D-TEK Stratus (includes CO ₂ sensor only) | 724-204-G1 |
| Accessories and Replacement Parts | |
| Earbuds | 721-607-G1 |
| TEK-Check R134a reference leak | 703-080-G10 |
| TEK-Check R600a reference leak | 703-080-G29 |
| TEK-Check R1234yf reference leak | 703-080-G12 |
| Wall charger (US and international) | 721-606-G1 |
| 12 V (dc) car charger | 721-605-G1 |
| Lithium ion battery | 721-702-G1 |
| Battery charging cradle | 721-610-G1 |
| Battery/cradle combo | 721-604-G1 |
| Extra-long probe (~27 in. (69 cm)) | 721-611-G1 |
| Needle probe extension | 721-612-G1 |
| Refrigerant sensor (Detects CFCs, HFCFs, HFCs, and HFOs) | 724-701-G1 |
| CO ₂ sensor | 724-701-G2 |
| Flammable refrigerant sensor | 724-701-G3 |
| Filter cap | 712-705-G1 |
| Filter cartridges | 712-707-G1 |
| Carrying case | 724-700-G1 |

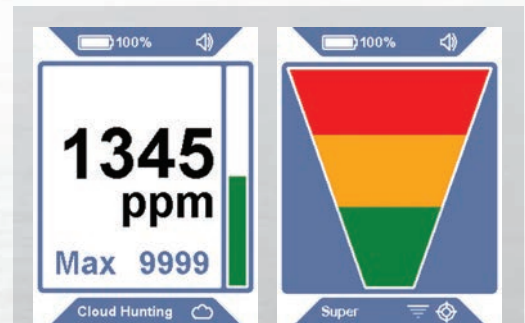


DUAL MODES HELP FIND THE LEAK FASTER

Use the new Cloud Hunting mode (left) to find the area highest in concentration, then switch to classic Pinpoint Mode (right) to pinpoint the leak.

DETECT REFRIGERANT, CO₂, AND EVEN FLAMMABLES

D-TEK 3 and D-TEK Stratus are designed with versatility in mind. Quickly and easily switch sensors to look for refrigerant, CO₂, or even flammable leaks.

- 724-202-G1 D-TEK Stratus with standard refrigerant sensor
- 724-204-G1 D-TEK Stratus with CO₂ sensor only
- 724-701-G1 Refrigerant sensor
- 724-701-G2 CO₂ sensor
- 724-701-G3 Flammable refrigerant sensor

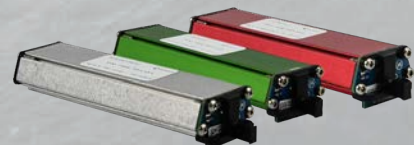

From left to right: refrigerant sensor 724-701-G1, CO₂ sensor 724-701-G2, and flammable refrigerant sensor 724-701-G3.