

Inverter Driven Heat Pump

36,000 BTU Circular Flow Cassette

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

- 360° Circular flow distributes air more evenly around the room
- Adjustable louver swing
- Adjustable airflow
- Optional human sensor detects room occupancy for energy savings
- 7mm High density heat exchanger
- Seamless airflow louver
- Grille available in White (UTG-GCGF) or Black (UTG-LCGVCB), sold separately



MODEL NUMBERS

Indoor Unit	AUU36RGLX
Outdoor Unit	AOU36RGLX
System	36RGLX

EFFICIENCIES

SEER	17.5
EER	10
HSPF	11.2
COP	13.2

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	*F(°C)	-5 to 115 (-20 to 46)
Heating		-5 to 75 (-20 to 24)

CAPACITIES

Cooling	Rated	BTU/hW	36,000
	Min.-Max.		9,600-39,000
Heating	Rated		36,000
	Min.-Max.		9,200-48,000

LINESET REQUIREMENTS

Connection Method		Flare
Liquid	in (mm)	Ø 3/8 (9.52)
		Ø 5/8 (15.88)
Pre-Charge Length	ft (m)	65 (20)
Minimum Length		16 (5)
Maximum Length		164 (50)
Max. Height Diff.		98 (30)

INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	11-5/16 x 33-1/16 x 33-1/16
	mm	288 x 840 x 840
Gross (H x W x D)	in	13-3/8 x 37-13/16 x 37-3/8
	mm	340 x 960 x 950
Net Weight	lb (kg)	57 (26)
Gross Weight		66 (30)

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	32-11/16 x 35-7/16 x 13
	mm	830 x 900 x 330
Gross (H x W x D)	in	39-3/8 x 41-5/16 x 17-1/2
	mm	1,000 x 1,050 x 445
Net Weight	lb (kg)	134 (61)
Gross Weight		152 (69)

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 30 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 30 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

UTG-GCGF	White Cassette Grille
UTG-LCGVCB	Black Cassette Grille
UTY-RNRUZ2	Wired Remote Control
UTY-RSRY	Simple Remote Control
UTY-LBTUC	IR Receiver Kit w/ Wireless Remote
UTY-SHZXC	Human Sensor Kit
UTY-TTRX	Third Party Thermostat Adapter



Indoor Unit ETL#: 3170288
 Outdoor Unit ETL#: 91987

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://portal.fujitsugeneral.com>

Inverter Driven Heat Pump

36,000 BTU Circular Flow Cassette

FAN DATA				
Indoor Unit Airflow Rate	Cooling	High	CFM (m3/h)	1,118 (1,900)
		Medium		936 (1,590)
		Low		836 (1,420)
		Quiet		695 (1,180)
	Heating	High		1,118 (1,900)
		Medium		936 (1,590)
		Low		836 (1,420)
		Quiet		695 (1,180)
Outdoor Unit Airflow Rate	Cooling		2,237 (3,800)	
	Heating		2,237 (3,800)	
SOUND PRESSURE				
Indoor Unit	Cooling	High	dB (A)	44
		Medium		41
		Low		38
		Quiet		34
	Heating	High		44
		Medium		41
		Low		38
		Quiet		34
Outdoor Unit	Cooling		54	
	Heating		56	
REFRIGERANT				
Type				R410A
Charge	lb oz			4 lb 10.1oz
	g			2,100
Oil Type				POE (RB68)

ELECTRICAL SPECIFICATIONS				
Voltage/Frequency/Phase			208-230V/60Hz/1	
Voltage Range			187-253 V	
Current	Cooling	Rated	A	16.1
	Heating	Rated		12.2
Maximum Operating Current		Cooling		17.6
		Heating		19.1
Starting Current			16.1	
MCA			24.6	
Maximum Circuit Breaker			30	
Input Power	Cooling	Rated	kW	3.6
		Min.-Max.		0.60-3.94
	Heating	Rated		2.73
		Min.-Max.	0.52-4.19	
Power Factor	Cooling		%	97
	Heating			97
OTHER				
Moisture Removal		pints/h (L/h)		6.5 (3.7)
Energy Star				No
Drain hose	Material		PVC (VP25)	
	Size	in (mm)	Ø 1 (25) (I.D.), Ø 1-1/16 (26.6)	
Operation Range	Cooling	°F (°C)	64 to 90 (18 to 32)	
		%RH	80 or less	
	Heating	°F (°C)	60 to 86 (16 to 30)	

Wall Bracket Data:

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.


Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).

Inverter Driven Heat Pump


36,000 BTU Circular Flow Cassette

DIMENSIONS



Units: In. (mm)

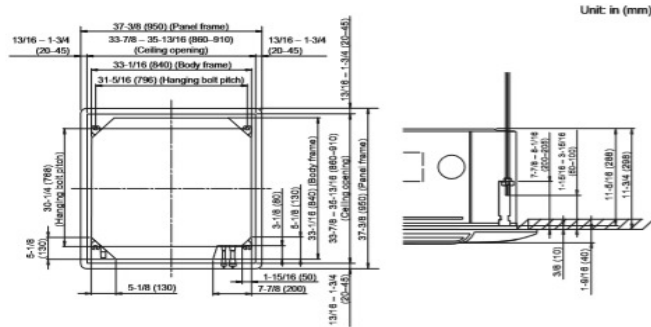

• Refrigerant piping and drain piping positions

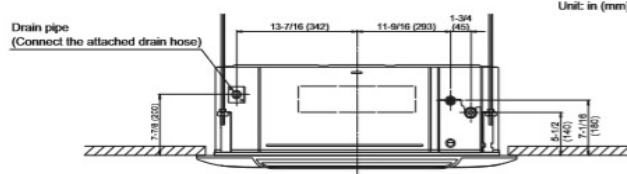

• Airflow split-flow duct and fresh-air inlet positions

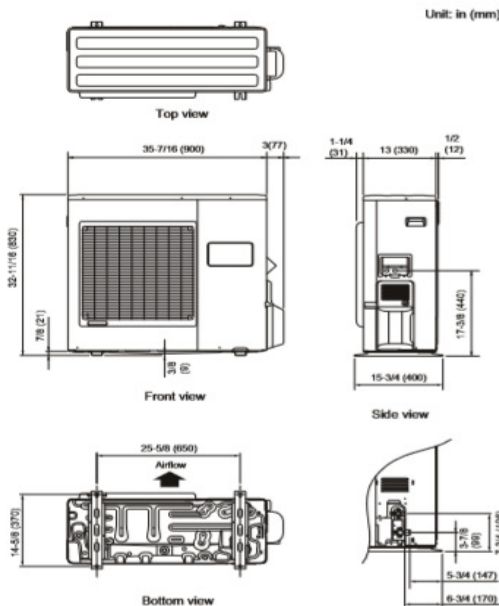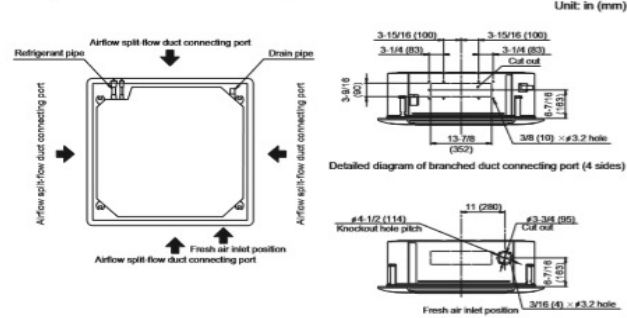

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).